



CIB9

CALL STATION

Call station with two push-to-call button switches, 1-gang


GENERAL DESCRIPTION

The CIB9 is equipped with a pair of momentary action, push-to-call button switches. The first one is for initiating normal calls to an administrative console. The second one is for initiating emergency calls. The button cap color of the Normal call switch is white and the Emergency call switch is red. The unit is printed with the words "Push to Call" on the stainless steel faceplate and each of the push-button switches are identified with the inscription "Normal" and "Emergency."

INTENDED USE - Indoor Environment

MECHANICAL SPECIFICATIONS

Controls	"Normal" Push-To-Call Button "Emergency" Push-To-Call Button
Button Cap Colors	White (Normal), Red (Emergency)
Action	Momentary Contact Push-Button Type
Dimensions	Mounting Plate: 4-1/2" H x 2- 3/4" W Mounting Holes: 3 - 9/32"
Depth Required	1" (25.4 mm)
Finish	Brushed, Stainless Steel
Weight	0.13 lbs. (0.059 kg)
Terminations	Solder Terminals
Mounting	Standard 1-gang electrical box, with 3 - 9 /32" mounting centers.
Audio Connection	6" Color Coded Leads, Pre-cut

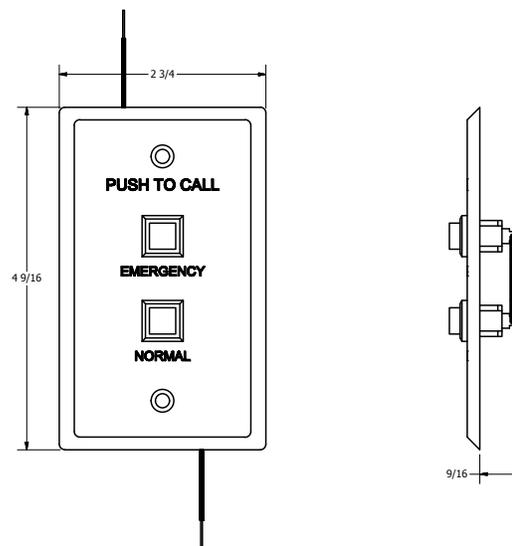

<p>Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the Specs and Diagrams section at: www.QuamSpeakers.com</p>			<p>QUAM-NICHOLS COMPANY, INC. 234 East Marquette Road. Chicago, IL. 60637 t: 1-800-NEED-NOW (800-633-3669) f: 1-888-NEED-NOW (888-633-3669) e: NeedNow@QNC.com www.QuamSpeakers.com</p>
<p>© 2016 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.</p>			