



## LANTERN POST LIGHT Model: PEL01342

**Please read these instructions carefully before use and retain for future reference.**

### **IMPORTANT SAFETY INFORMATION**


- When using electrical appliances basic safety precautions should always be followed.
- Check that the voltage indicated on the rating plate corresponds with that of the local network before connecting the appliance to the mains power supply.

### **Safety Information for Installation and Operation**

- Avoid excessive force when installing.
- Always install on a surface that can support the weight of the fixture.

## INSTALLATION

- Turn off or isolate the mains supply.
- Offer the mounting base onto a suitable masonry slab in the desired position with reference to the supply wiring and mark the location of the mounting holes.
- Drill the ground where marked taking care not to drill through hidden wiring or pipework and fit the screw plugs.
- Lower the connection cable through the lower post half and screw the two halves of the post together until tight.
- Screw the assembled post into the base to form a complete pillar assembly.
- Connect the mains supply to the terminal block inside the base as follows:
  - Positive supply wire (brown or red) to the terminal marked L.
  - Connect the neutral supply wire (blue or black) to the terminal marked N.
- Attach the mounting base to the ground using screws into the previously drilled and plugged holes.
- Assemble the diffuser by sliding in the glazing sheets.
- Attach the diffuser by engaging the lugs and turn it to locate securely.
- Fit an appropriate lamp E27 Max 11W (not supplied).
- Attach the capping onto the diffuser by engaging the lugs and turn it to locate securely.
- Fit the finial onto the capping by turning it until it locks into place.
- Restore the mains supply.

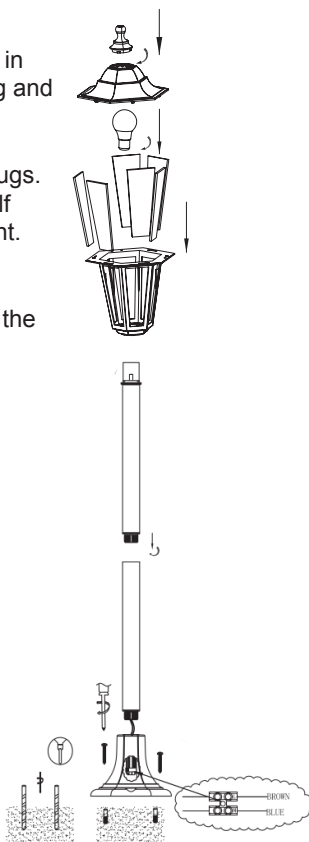

## CLEANING AND MAINTENANCE

- Clean only with a damp cloth with a little liquid detergent. Do not use any chemicals, abrasives or solvents that may damage the product.

## SPECIFICATIONS

Voltage	220-240V~50Hz <input type="checkbox"/>
IP rating	IP44
Lamp type	E27 11W Fluorescent or LED



### INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronic Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.



Made in China. PR2 9PP

Man Rev 1.0