


# PNP Transistor TO-126



**Pin Configuration:**

- 1. Emitter
- 2. Collector
- 3. Base

**Feature:**

- PNP Plastic Power Transistors
- Medium Power Linear and Switching Applications

**Absolute Maximum Ratings**

Description	Symbol	-	BD140	Unit
Collector-Base Voltage (Open Emitter)	$V_{CBO}$	Max.	100	V
Collector Emitter Voltage (Open Base)	$V_{CEO}$		80	
Collector Current	$I_C$		1.5	A
Total Power Dissipation upto $T_C = 25^\circ C$	$P_{tot}$		12.5	W
Junction Temperature	$T_j$		150	$^\circ C$
Collector-Emitter Saturation Voltage $I_C = 0.5A, I_B = 0.05A$	$V_{CE(Sat)}$		0.5	V
DC Current Gain $I_C = 0.15A; V_{CE} = 2V$	$h_{FE}$	Min. Max.	40 250	-

**Ratings (at  $T_a = 25^\circ C$  unless otherwise specified)**

Description	Symbol	-	BD140	Unit
Collector-Base Voltage (Open Emitter)	$V_{CBO}$	Max.	100	V
Collector Emitter Voltage (Open Base)	$V_{CEO}$		80	
Emitter-Base Voltage (Open Collector)	$V_{EBO}$		5	
Collector Current	$I_C$		1.5	A
Base Current	$I_B$		0.5	
Total Power Dissipation up to $T_A = 25^\circ C$ Derate above $25^\circ C$	$P_{tot}$			1.25 10

# PNP Transistor

## TO-126

multicomp **PRO**

### Ratings (at $T_a = 25^\circ\text{C}$ unless otherwise specified)

Description	Symbol	-	BD140	Unit
Total Power Dissipation up to $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_{\text{tot}}$	Max.	12.5 100	W mW/ $^\circ\text{C}$
Junction Temperature	$T_j$		150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-	-65 to +150	

#### Thermal Resistance

From Junction to Case	$R_{\text{th(j-c)}}$	-	10	$^\circ\text{C/W}$
From Junction to Ambient	$R_{\text{th(j-a)}}$	-	100	

### Characteristics ( $T_a = 25^\circ\text{C}$ unless otherwise specified)

Description	Symbol	-	BD140	Unit
Collector Cut off Current $I_E = 0; V_{CB} = 30\text{V}$ $I_E = 0; V_{CB} = 30\text{V}; T_C = 125^\circ\text{C}$	$I_{\text{CBO}}$	Max.	0.1 10	$\mu\text{A}$
Emitter Cut off Current $I_C = 0; V_{EB} = 5\text{V}$	$I_{\text{EBO}}$		10	
Breakdown Voltages $I_C = 0.03\text{A}; I_B = 0$ $I_C = 1\text{mA}; I_E = 0$ $I_E = 1\text{mA}; I_C = 0$	$V_{\text{CEO (Sus)}}^*$ $V_{\text{CBO}}$ $V_{\text{EBO}}$	Min.	80 100 5	V
Saturation Voltage $I_C = 0.5\text{A}; I_B = 0.05\text{A}$	$V_{\text{CE (sat)}}^*$	Max.	0.5	
Base-Emitter On Voltage $I_C = 0.5\text{A}; V_{\text{CE}} = 2\text{V}$	$V_{\text{BE (on)}}^*$		1	
DC Current Gain $I_C = 0.15\text{A}; V_{\text{CE}} = 2\text{V}^{**}$	$h_{\text{FE}}^*$	Min. Max.	40 250	-


#### \*\* hFE Classification:

-6	Min.	40
	Max.	100
-10	Min.	63
	Max.	160
-16	Min.	100
	Max.	250
-25	Min.	160
	Max.	400

\* Pulse Test: Pulse Width =  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

# PNP Transistor

## TO-126

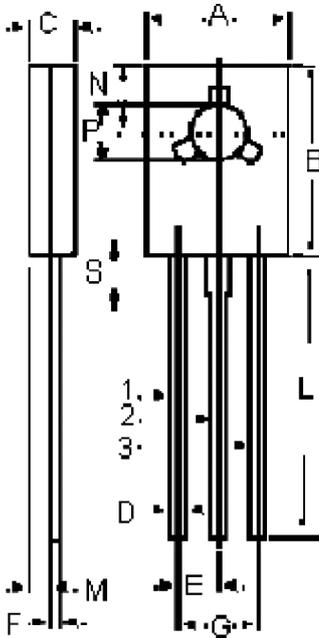

Dimensions	Min.	Max.
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 (Typical)	
F	0.49	0.75
G	4.5 (Typical)	
L	15.7 (Typical)	
M	1.27 (Typical)	
N	3.75 (Typical)	
P	3	3.2
S	2.5 (Typical)	

Dimensions : Millimetres

### Pin Configuration:

1. Emitter
2. Collector
3. Base

### Part Number Table

Description	Part Number
Transistor, PNP, TO-126	BD140

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.