## **DATASHEET - XNE-8DI-24VDC-P**

RAPHRAPA RAPERTON AND THE PROPERTY OF THE PRO

Digital input card XI/ON ECO, 24 V DC, 8DI

Part no. XNE-8DI-24VDC-P Catalog No. 140035

EL-Nummer (Norway) 0004520690



**Delivery program** 

Function	I/O modules
	Digital input modules
Function	XNE Slice module
Short Description	8 Digital inputs, 24 V DC Positive switching

# **Technical data**

$\mathbf{a}$		1
	CI	

Standards			EN 61000-6-2 EN 61000-6-4 EN 61131-2
Potential isolation			Yes, through optocoupler
Ambient temperature			
Ambient temperature, operation		°C	0 - +55
Storage, transport	9	°C	-25 - +85
Relative humidity			
Relative humidity			5 - 95 % (indoor), Level RH-2, no condensation (for storage at 45°C)
Ambient conditions, mechanical			
Degree of Protection			IP20
Harmful gases		ppm	SO <sub>2</sub> : 10 (rel. humidity < 75%, no condensation) H <sub>2</sub> S: 1.0 (rel. humidity < 75 %,no condensation)
Vibration resistance, operating conditions			according to IEC/EN 60068-2-6
Mechanical shock resistance		g	according to IEC 60068-2-27
Continuous shock resistance (IEC/EN 60068-2-29)			According to IEC 60068-2-29
Drop and topple			According to IEC 60068-2-31, free fall according to IEC 60068-2-32
Electromagnetic compatibility (EMC)			
ESD	Air/contact discharge	kV	EN 61000-4-2
Electromagnetic fields	(0.081) / (1,42) / (2 2,7) GHz	V/m	EN 61100-4-2
Burst			EN 61100-4-4
Surge			EN 61100-4-5
Radiated RFI		V	EN 61100-4-6
Emitted interference (radiated, high frequency)	(30230 MHz) / (2301000 MHz)	dB	EN 55016-2-3
Voltage fluctuations/voltage dips			EN 61131-2
Type test			to EN 61131-2
Approvals			CE, cULus
Other technical data (sheet catalogue)			Technical Data
Terminations			

Rated data according to VDE 0611 Part 1/8.92 /

			IEC/EN 60947-7-1
Connection design in TOP direction			Push-In spring-cage terminals
Stripping length		mm	8
Clamping range			
			max. 0.14 - 1.5 mm <sup>2</sup>
Connectable conductors		2	0.05 4.5
"e" solid H07V-U		mm <sup>2</sup>	0.25 - 1.5
"f" flexible H 07V-K		mm <sup>2</sup>	0.25 - 1.5
"f" with ferrules without plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm <sup>2</sup>	0.25 - 1.5
"f" with ferrules with plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm <sup>2</sup>	0.25 - 0.75
Connectable conductors			
"e" solid H07V-U		$\mathrm{mm}^2$	0.25 - 1.5
"f" flexible H 07V-K		mm <sup>2</sup>	0.25 - 1.5
"f" with ferrules without plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm <sup>2</sup>	0.25 - 1.5
"f" with ferrules with plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm <sup>2</sup>	0.25 - 0.75
Gauge pin IEC/EN 60947-1			A1
Analog input modules			
Channels		Number	8
Rated voltage through supply terminal	$U_{L}$		24 V DC
Rated current consumption from supply terminal	IL	mA	1.5
Rated current consumption from module bus	I <sub>MB</sub>	mA	≦ 15
Heat dissipation		W	<1.5
Base modules			
without C connection			Already built in
Analog output modules			
Channels		Number	8
Rated voltage through supply terminal	$U_{L}$		24 V DC
Rated current consumption from supply terminal	IL	mA	1.5
Rated current consumption from module bus	$I_{\text{MB}}$	mA	≦ 15
Heat dissipation		W	<1.5
Base modules			
without C connection			Already built in
Digital outputs			
Channels		Number	
Rated voltage through supply terminal	UL		24 V DC
Rated current consumption from the supply terminal (at load current = 0 mA)	IL	mA	1.5
Rated current consumption from module bus	I <sub>MB</sub>	mA	≦ 15
Digital inputs			
Channels		Number	
Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	lլ	mA	1.5
Rated current consumption from module bus	I <sub>MB</sub>	mA	≦ 15
Rated insulation voltage	Ui	V AC	500
Heat dissipation		W	< 1.5
Input voltage			
Nominal input voltage	U <sub>e</sub>	V DC	24 V DC
Low level	U <sub>e</sub> L	V	-U <sub>L</sub> - +5 V
High level	U <sub>e</sub> H	V	11 - 30 V
Input current			
Low level/active level	l <sub>e</sub> L	mA	-1 mA - 1.5 mA
High level/active level	I <sub>eH</sub>	mA	2 mA - 5 mA
Input delay			
t <sub>Rising</sub> edge		μs	< 100

Familing edge   Parameter			
Without Connection     Already built in       Relay modules     Verally built in       Rated votiage through supply terminal     UL     24 V DC       Rated current consumption from supply terminal     IL     mA     1.5       Rated current consumption from module bus     IMB     mA     \$15       Base modules     Without C connection     Already built in       Power supply module     Aready built in       Rated current consumption from supply terminal     UL     Y DC       Rated current consumption from module bus     IL     mA     1.5       Rated current consumption from module bus     IL     mA     1.5       Rated vottage through supply terminal     IL     mA     1.5       Rated vottage through supply terminal     IL     mA     1.5       Rated current consumption from module bus     IL     mA     1.5       Rated current consumption from supply terminal     IL     mA     1.5       Rated current consumption from module bus     IL     mA     1.5       Rated current consumption from module bus     IL     mA     1.5       Rated current consumption from module bus     IL     mA     1.5       Rated current consumption from module bus     IL     mA     2.5       Read of vottage through supply terminal     IL		alling edge µs	< 200
Relay modules Rated voltage through supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated voltage through supply terminal Rated voltage through supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated current consumption from module bus Rated voltage through supply terminal Rated current consumption from module bus Rated voltage through supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated current consumption from supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated curre		modules	
Rated voltage through supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated current consumption from supply terminal Rated voltage through supply terminal Rated current consumption from supply terminal Rated current consumption from module bus Rated current consumption from module bus Rated current consumption from module bus Rated voltage through supply terminal Rated voltage through supply terminal Rated voltage through supply terminal Rated current consumption from supply terminal Rated current co		ithout C connection	Already built in
Rated current consumption from supply terminal Rated current consumption from module bus    Name   N			
Rated current consumption from module bus  Base modules  without C connection  Power supply module  Rated voltage through supply terminal  Rated current consumption from module bus  Rated current consumption from module bus  Rated current consumption from module bus  Rated voltage through supply terminal  Rated voltage through supply terminal  Rated current consumption from supply terminal  Rated current consumption from supply terminal  Rated voltage through supply terminal  Rated current consumption from supply terminal  Rated current consumption from module bus  Rated curren	ply terminal U <sub>L</sub>	I voltage through supply terminal	24 V DC
Base modules without C connection  Power supply module  Rated voltage through supply terminal  Rated current consumption from supply terminal  Rated current consumption from module bus  Rated current consumption from module bus  Rated current consumption from module bus  Rated voltage through supply terminal  Rated voltage through supply terminal  Rated current consumption from module bus  Rated current consumption from supply terminal  Rated current consumption from supply terminal  Rated current consumption from module bus  Rated current consumption from module	n from supply terminal	I current consumption from supply terminal	A 1.5
without C connection Already built in   Power supply module VL 24 V DC   Rated voltage through supply terminal IL mA 1.5   Rated current consumption from supply terminal IL mA \$15   Rated current consumption from module bus IMB mA \$15   Counter module   Channels Number 8   Rated voltage through supply terminal IL mA 1.5   Rated current consumption from supply terminal IL mA 1.5   Rated current consumption from module bus IMB mA \$15   Heat dissipation IMB mA \$15   Digital inputs   Input voltage VD <1.5	n from module bus	I current consumption from module bus $I_{MB}$ $mA$	A ≦ 15
Power supply module         Rated voltage through supply terminal       UL       x24 V DC         Rated current consumption from supply terminal       IL       mA       1.5         Rated current consumption from module bus       IMB       mA       ≤ 15         Counter module       Channels       Number       8         Rated voltage through supply terminal       UL       24 V DC         Rated current consumption from supply terminal       IL       mA       1.5         Rated current consumption from module bus       IMB       mA       ≤ 15         Heat dissipation       MB       mA       ≤ 15         Digital inputs       Input voltage         Nominal input voltage       Ue       V DC       24 V DC         Low level       Ue       V DC       24 V DC         High level       Ue       V DC       24 V DC         Input current       Ue       V DC       24 V DC         Input current       Ue       V DC       24 V DC         High level       V DC       24 V DC         Input current       W DC       24 V DC         Input current       W DC       24 V DC         Input current       W DC       <		modules	
Rated voltage through supply terminal       UL       24 V DC         Rated current consumption from supply terminal       IL       mA       1.5         Rated current consumption from module bus       IMB       mA       ≤ 15         Counter module         Channels       Number       8         Rated voltage through supply terminal       UL       24 V DC         Rated current consumption from supply terminal       IL       mA       1.5         Rated current consumption from module bus       IMB       mA       ≤ 15         Heat dissipation       V       < 1.5       1.5         Digital inputs         Input voltage       V       < 24 V DC         Nominal input voltage       V DC       24 V DC         Low level       V DC       24 V DC         High level       V DC       11 - 30 V         Input current       V DC       11 - 30 V         Input current       Imput current       Imp		ithout C connection	Already built in
Rated current consumption from supply terminal IL mA 1.5   Rated current consumption from module bus IMB mA ≤ 15   Counter module Channels Number 8   Rated voltage through supply terminal UL 24 V DC   Rated current consumption from supply terminal IL mA 1.5   Rated current consumption from module bus IMB mA ≤ 15   Heat dissipation W < 1.5	e	er supply module	
Rated current consumption from module bus  Counter module  Channels Rated voltage through supply terminal  Rated current consumption from supply terminal  Rated current consumption from module bus  Rated current consumption from module bus  Rated current consumption from module bus  NMB  MA  1.5  Rated current consumption from module bus  NMB  MA  ≤ 15  W  < 1.5  Digital inputs  Nominal input voltage  Nominal input voltage  Low level  High level  Ue  V  Ue  V  11 - 30 V  Input current  Low level  Low level  Low level  Low level  Righ level  Rated current consumption from module bus  Number  8  24 V DC  24 V DC  24 V DC  11 - 30 V  Input current  Low level  Rated current consumption from supply terminal  Rated current consumption from supply terminal  Rated current consumption from supply terminal  8  1.5  1.5  1.5  1.5  1.5  1.5  1.5	ply terminal U <sub>L</sub>	I voltage through supply terminal U <sub>L</sub>	24 V DC
Counter module  Channels  Rated voltage through supply terminal  Rated current consumption from supply terminal  Rated current consumption from module bus  IMB  MA  \$ 1.5  Rated current consumption from module bus  Heat dissipation  Digital inputs  Input voltage  Nominal input voltage  Ve  VDC  4 V DC  4 V DC  Low level  Ue  V DC  4 V DC  1 1-30 V  Input current  Low level  IeH  MA  -1 mA - 1.5 mA  High level  IeH  MA  2 mA - 5 mA	n from supply terminal	I current consumption from supply terminal	A 1.5
Channels       Number       8         Rated voltage through supply terminal       U <sub>L</sub> 24 V DC         Rated current consumption from supply terminal       I <sub>L</sub> mA       1.5         Rated current consumption from module bus       I <sub>MB</sub> mA       ≤ 15         Heat dissipation       W       < 1.5	n from module bus	I current consumption from module bus $$\rm I_{MB}$$ $\rm m^{\rm A}$	Δ ≦15
Rated voltage through supply terminal $U_L$ $Z4VDC$ Rated current consumption from supply terminal $I_L$ $MA$ $1.5$ Rated current consumption from module bus $I_{MB}$ $MA$ $1.5$ Rated current consumption from module bus $I_{MB}$ $MA$ $1.5$ Rated current consumption from module bus $I_{MB}$ $MA$ $1.5$ Rated current consumption from module bus $I_{MB}$ $MA$ $1.5$ Digital inputs  Input voltage  Nominal input voltage  Nominal input voltage $I_{MB}$		iter module	
Rated current consumption from supply terminal  IL mA 1.5  Rated current consumption from module bus  IMB mA ≦ 15  Heat dissipation  W < 1.5  Digital inputs  Input voltage  Nominal input voltage  Ue V DC 24 V DC  Low level  Ue V Uc -45 V  High level  UeH V 11 - 30 V  Input current  Low level  Lo		nels Nu	umber 8
Rated current consumption from module bus $ \begin{array}{ccccccccccccccccccccccccccccccccccc$	ply terminal U <sub>L</sub>	I voltage through supply terminal U <sub>L</sub>	24 V DC
Heat dissipation W < 1.5  Digital inputs  Input voltage  Nominal input voltage  Ue  VDC  24 VDC  24 VDC  Low level  UeL  V  UEL  V  UEL  V  11 - 30 V  Input current  Low level  IeL  MA  -1 MA - 1.5 MA  High level  IeH  MA  2 MA - 5 MA	n from supply terminal	I current consumption from supply terminal	A 1.5
Digital inputs           Input voltage         Ue         V DC         24 V DC           Nominal input voltage         Ue         V DC         24 V DC           Low level         Ue         V -UL - +5 V           High level         Ue         V 11 - 30 V           Input current         Ue         T mA - 1.5 mA           High level         IeH         mA         -1 mA - 1.5 mA           High level         IeH         mA         2 mA - 5 mA	n from module bus	I current consumption from module bus $$I_{\mbox{\scriptsize MB}}$$ $$m\mbox{\it A}$$	Δ ≦ 15
Input voltage  Nominal input voltage  Ue  VDC  24 V DC  Low level  Ue  Ue  V  -UL - +5 V  High level  Ue  V  11 - 30 V  Input current  Low level  Ie  MA  -1 mA - 1.5 mA  High level  Ie  MA  2 mA - 5 mA		dissipation W	< 1.5
Nominal input voltage         Ue         V DC         24 V DC           Low level         UeL         V         -UL - +5 V           High level         UeH         V         11 - 30 V           Input current         IeL         mA         -1 mA - 1.5 mA           High level         IeH         mA         2 mA - 5 mA		al inputs	
Low level $U_{e}L \qquad V \qquad -U_{L} - +5  V$ $High level \qquad U_{e}H \qquad V \qquad 11 - 30  V$ $Input current \qquad I_{e}L \qquad mA \qquad -1  mA - 1.5  mA$ $High level \qquad I_{e}H \qquad mA \qquad 2  mA - 5  mA$		voltage	
High level       UeH       V       11 - 30 V         Input current       IeL       mA       -1 mA - 1.5 mA         High level       IeH       mA       2 mA - 5 mA	$U_e$	ominal input voltage $$ U $_{ m e}$ $$ V $_{ m C}$	DC 24 V DC
Input current         I <sub>e</sub> L         mA         -1 mA - 1.5 mA           High level         I <sub>e</sub> H         mA         2 mA - 5 mA	$U_eL$	w level $U_eL$ V	-U <sub>L</sub> - +5 V
Low level         I <sub>e</sub> L         mA         -1 mA - 1.5 mA           High level         I <sub>e</sub> H         mA         2 mA - 5 mA	$U_{e}H$	igh level $U_e H$ $V$	11 - 30 V
High level I <sub>eH</sub> mA 2 mA - 5 mA		current	
	I <sub>e</sub> L	ow level I <sub>e</sub> L mA	-1 mA - 1.5 mA
	I <sub>eH</sub>	igh level I <sub>eH</sub> m#	A 2 mA - 5 mA
Interfaces		faces	
Rated voltage through supply terminal $U_L$ 24 V DC	ply terminal U <sub>L</sub>	l voltage through supply terminal U <sub>L</sub>	24 V DC
Rated current consumption from supply terminal $I_L$ $mA$ 1.5	n from supply terminal	l current consumption from supply terminal	A 1.5
Rated current consumption from module bus $I_{MB}$ mA $\leq 15$	n from module bus	I current consumption from module bus $I_{MB}$ $m$	Δ ≦ 15

#### Notes

The supply terminal  $(U_L)$  supplies power for the card's electronics and for the sensors at the inputs. The total current required for each card is the sum of all partial currents.

Part of the XI/ON card's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal  $(U_L)$ .

Max. permissible capacity: 141 nF at 79 V AC/50 Hz; 23 nF at 265 V AC/50 Hz

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	0
Heat dissipation per pole, current-dependent	$P_{\text{vid}}$	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	$P_{vs}$	W	1.5
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	55
Degree of Protection			IP20
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Meets the product standard's requirements.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


#### Technical data FTIM 7.0

PLC's (EG000024) / Fieldbus, decentr. periphery - digital I/O module (EC001599)			
Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - digital I/O module (ecl@ss10.0.1-27-24-26-04 [BAA055014])			
Supply voltage AC 50 Hz	V	0 - 0	
Supply voltage AC 60 Hz	V	0 - 0	
Supply voltage DC	V	18 - 30	
Voltage type of supply voltage		DC	
Number of digital inputs		8	
Number of digital outputs		0	
Digital inputs configurable		No	
Digital outputs configurable		No	
Input current at signal 1	mA	2	
Permitted voltage at input	V	30 - 30	
Type of voltage (input voltage)		DC	
Type of digital output		None	
Output current	Α	0	
Permitted voltage at output	V	0 - 0	
Type of output voltage		DC	
Short-circuit protection, outputs available		No	
Number of HW-interfaces industrial Ethernet		0	
Number of interfaces PROFINET		0	
Number of HW-interfaces RS-232		0	
Number of HW-interfaces RS-422		0	
Number of HW-interfaces RS-485		0	
Number of HW-interfaces serial TTY		0	
Number of HW-interfaces parallel		0	
Number of HW-interfaces Wireless		0	
Number of HW-interfaces USB		0	
Number of HW-interfaces other		1	
With optical interface		No	
Supporting protocol for TCP/IP		No	
Supporting protocol for PROFIBUS		Yes	
Supporting protocol for CAN		Yes	
Supporting protocol for INTERBUS		No	
Supporting protocol for ASI		No	
Supporting protocol for KNX		No	

Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
10 link master		No
System accessory		Yes
Degree of protection (IP)		IP20
Type of electric connection		Screw-/spring clamp connection
Time delay at signal exchange	ms	0 - 0
Fieldbus connection over separate bus coupler possible		Yes
Rail mounting possible		Yes
Wall mounting/direct mounting		No
Front build in possible		No
Rack-assembly possible		No
Suitable for safety functions		No
Category according to EN 954-1		None
SIL according to IEC 61508		None
SIL according to IEC 01300		
Performance level acc. EN ISO 13849-1		None
Performance level acc. EN ISO 13849-1		None
Performance level acc. EN ISO 13849-1 Appendant operation agent (Ex ia)		None No
Performance level acc. EN ISO 13849-1  Appendant operation agent (Ex ia)  Appendant operation agent (Ex ib)		None No
Performance level acc. EN ISO 13849-1  Appendant operation agent (Ex ia)  Appendant operation agent (Ex ib)  Explosion safety category for gas	mm	None No No None
Performance level acc. EN ISO 13849-1  Appendant operation agent (Ex ia)  Appendant operation agent (Ex ib)  Explosion safety category for gas  Explosion safety category for dust	mm mm	None No No None

# Approvals

Product Standards	UL 508; CSA-C22.2 No. 142; IEC/EN 6113-2; CE marking
UL File No.	E205091
UL Category Control No.	NRAQ, NRAQ7
CSA File No.	UL report applies to both US and Canada
CSA Class No.	2252-01, 2252-81
North America Certification	UL recognized, certified by UL for use in Canada
Specially designed for North America	No
Current Limiting Circuit-Breaker	No
Degree of Protection	IEC: IP20, UL/CSA Type: -

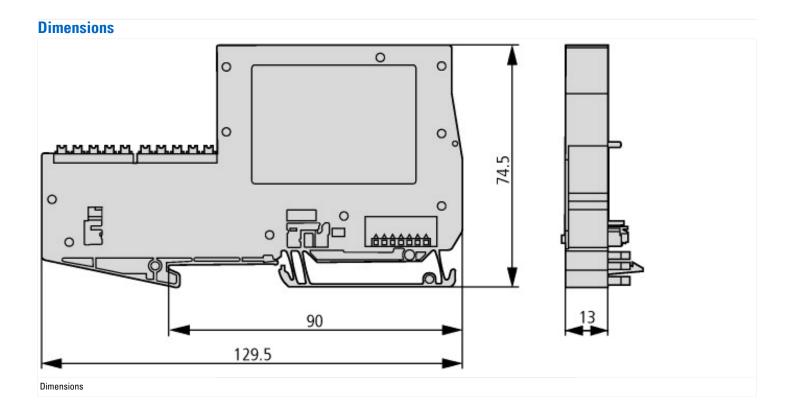

## **Additional product information (links)**

Manual Digital XI/ON modules, power supply module MN05002010Z		
Benutzerhandbuch XI/ON-Module, Stromversorgungsmodul MN05002010Z - Deutsch	ftp://ftp.moeller.net/D0CUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf	
Manual Digital XI/ON modules, power supply module MN05002010Z - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf	
Technical Data	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=14.111	