

🇩🇪 M240 | Leistungsregler 230 V/AC, 10 A, Multifunktion

Leistungsregler für 230 V/AC Verbraucher wie Motoren, Lampen, viele dimmbare LEDs usw. Der Regler ist überlastfest und kann über ein Potentiometer (100 K lin.), über eine Steuerspannung (0 - 10 V) oder mit PWM Signalen (0 - 100%, 100 - 10.000 Hz) geregelt werden.


🇬🇧 M240 | Power Controller 230 V/AC, 10 A, Multifunction

Power controller for 230 V/AC consumers such as motors, lamps, many dimmable LEDs etc. The controller is overload-proof and can be controlled via a potentiometer (100 K lin.), a control voltage (0 - 10 V) or with PWM signals (0 - 100%, 100 - 10,000 Hz).

Technical Data:

Operating voltage: 220 - 230 V/AC 50 - 60 Hz | **Max. connectable load:** 10 Ampere (2,300 W) | **Control mode:** phase angle control | **Switching-on:** soft start | **Operating display, overload display:** 2-coloured LED | **Control options:** with potentiometer 100 K lin or control voltage 0 - 10 V/DC or PWM signal 3 - 24 V 100 - 10,000 Hz | **The control signal input is completely isolated from the load control circuit** | **Connections:** Plug contacts flat plugs 6.3 mm and 2.8 mm

ES Regulador de potencia 230 V/AC, 10 A, multifunción | **FR** Régulateur de puissance 230 V/AC, 10 A, multifonction | **NL** Vermogensregelaar 230V/AC, 10A, en is multi functioneel | **PL** Regulator Mocy 230V/AC, 10A, wielofunkcyjny | **PT** Controlador de potência 230 V/AC, 10 A, multifunção | **RU** Регулятор мощности 230 В/переменный ток, 10 А, многофункциональный

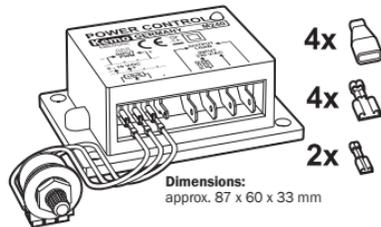

www.kemo-electronic.de



Kemo
Electronic

M240

Kemo
Electronic

M240

POWER CONTROLLER
230 V/AC, 10 A, MULTIFUNCTION
LEISTUNGSREGLER
230 V/AC, 10 A, MULTIFUNKTION

Kemo
Electronic

M240



Deutsch



English



Español



Français



Nederlands




Polski



Português



Русский

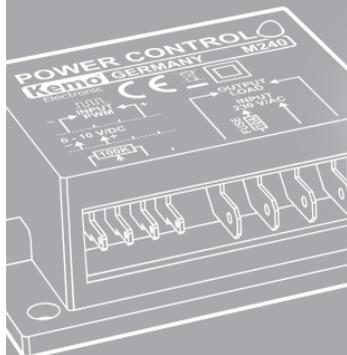

With 3 different control options!

P / Module / M240 / Ver. 001 /
Karton 1

Picture may differ | Bild kann abweichen

Kemo Electronic GmbH
Leher Landstrasse 20
27607 Geestland, Germany