

Bluetooth® Access Controller




PR-B1124-PQ Proximity Card Reader

Streamlined, fully app-based setup using integrated Bluetooth® wireless technology. No codes to remember, intuitive app design for easy, visual programming. Provides convenience and security to the user and administrator. All data is secured on the device without the risks inherent with an internet connection.

Features:

- **No Codes to Remember** – Intuitive, visual app-based programming and management, 1,000 users, device options, etc.
- **More Than Access** – Can control doors, gates, lighting, machinery, etc.
- **No Internet Exposure** – All data secured locally on device
- **Multiple User Types** – Permanent, scheduled, temporary, # of times
- **Output Modes** – Timed relock, continually unlocked or locked, toggle
- **User Customization** – Individually customizable output mode and time
- **Hold Open** – Hold door open with card or app (customizable)
- **Secure, Integrated Bluetooth** – Passcode protected, AES 128 encryption
- **Authorized User Monitor** – Displays total number of users to guard against unauthorized additions
- **Two Ways to Unlock or Trigger a Device** – Card or app
- **Unlimited Devices** – Access/manage unlimited devices with one app
- **Easy Backup/Restore** – For off-device storage / restoration / replication
- **Wrong-Code Lockout and Tamper Alarm Output** – Customizable
- **Multilingual App Interface** – Currently supports English, Portuguese, Spanish, French, German, Russian, Vietnamese, and Chinese (Traditional or Simplified)

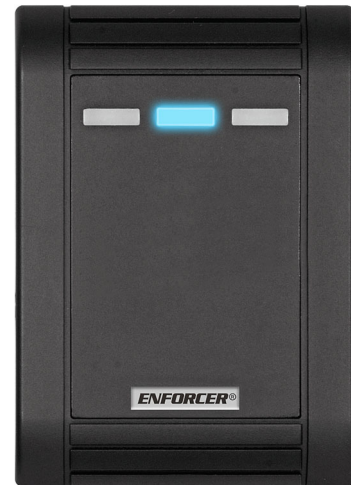

12~24
VDC

IP65

Audit
Trail

1,000
Users

SL Access™ App:



App-Based Management and Control:


On-Device Security

AES 128 Encryption
Settings, passcodes kept on device, set by the Administrator




Administrator Settings

Set all device parameters, manage users, view audit trail, backup/restore




User Management

Add, view, import/export, customize individual settings, scheduling, output settings



Audit Trail

View most recent 1,000 events, searchable by user and type, and download for archive



Unlock with App

Users can unlock the door with the app, as well as with the proximity card



VHF R O D U P ® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SECO-LARM is under license. Other trademarks and trade names are those of their respective owners.



Copyright © 2020 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI™


PL-PR-B1124-PQ_200817.docx

Specifications:


| | | |
|--------------|---------------|---|
| Access modes | | App / proximity card |
| Users | | 1,000 users / 1 administrator |
| Current draw | Standby | 63mA@12VDC, 36mA@24VDC |
| | Active (max.) | 80mA@12VDC, 45mA@24VDC |
| Outputs | Relay | Solid state, form C, 2.5A@30VDC |
| | Tamper | 50mA@30VDC |
| Output modes | | Timed relock (1~1,800s), continually locked, continually unlocked, toggle |
| Inputs | Egress | N.O. Ground |
| | Door sensor | N.C. Ground |

| | |
|-----------------------|---|
| Operating voltage | 9~25 VDC |
| Electrical protection | Short circuit, electro static discharge, reverse polarity, relay contact protection |
| Proximity reader | EM 125kHz |
| Bluetooth radio | Bluetooth Low Energy (BLE) 4.2 |
| IP Rating | IP65 Weather resistant |
| Enclosure material | ABS Plastic |
| Operating temperature | -4°~122° F (-20°~50° C) |
| Weight | 6.3-oz (180g) |

Two Ways to Unlock or Trigger a Device:

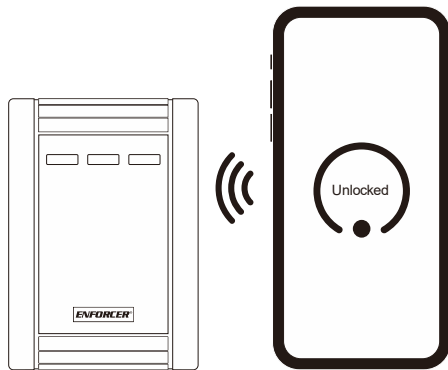


Unlock with the app



Unlock with a proximity card

Dimensions:

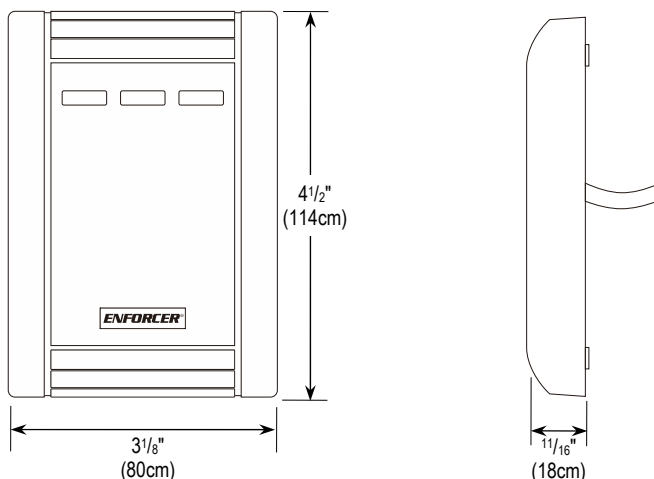

Download the SL Access™ App:



iOS 11.0 and higher



Android 5.0 and higher

VHF R ØDUP® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SECO-LARM is under license. Other trademarks and trade names are those of their respective owners.



Copyright © 2020 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.
SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI™

PL_PR-B1124-PQ_200817.docx