

Midi / EvoSIGNAL

Midi TwinLIGHT Combi 12/24VAC/DC GN



Midi CE WOHS

MECHANICAL DATA	
Height	130 mm
Diameter	85 mm
Materials	PC PC/ABS
Dome colour	Green
Housing colour	Grey
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm ² / 24AWG
cross-sectional area maximum	1,50mm ² / 16AWG
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	219 g
Product weight	177 g

ELECTRICAL DATA	
Operating voltage	12V
	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	290 mA
Rated inrush current	2,5A
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

OPTICAL DATA	
Light source	LED
Light colour	Green
Optical signal image	Blink Permanent TwinLight
Blink frequency (Hz)	1 Hz
Service life optical	50,000 h minimum
Pulse- & pause Duration [ms]	466ON, 557OFF

ACUSTICAL DATA	
Volume (max) at 1m distance	110,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi / EvoSIGNAL

Midi TwinLIGHT Combi 12/24VAC/DC GN

Acoustic signal image	Multi-tone
Number of tones	10 tone
Audio frequency	3300 Hz
Acoustic service life	5,000 h minimum


APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with GL	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi / EvoSIGNAL

Midi TwinLIGHT Combi 12/24VAC/DC GN

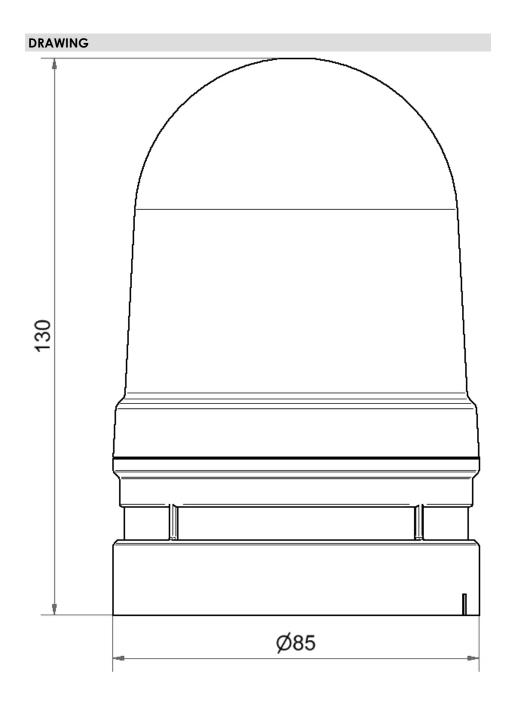

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.