



Description

This is a kind of high performance HDMI Amplifier Switcher. This kind HDMI Amplifier Switcher not only has the key-press-switching function, but also has intelligent function.

This kind of HDMI Amplifier Switcher routes high definition video (in multiple resolutions up to 1080p) and digital audio from any one of the several sources to display units. All inputs accommodate the connections of the high definition video sources simultaneously, compatible well for HD-DVD, SKY-STB, PS3, Xbox360 etc. The output sends the high definition audio/video signals to a high definition display

Features

- Multifunctional on switching : intelligent or mechanical
- Support highest video resolution 1080p.
- Support 250MHz/2.5Gbps per channel (7.5Gbps all channel) bandwidth.
- Support 12bit per channel (36bit all channel) deep color.
- HDCP pass-through.
- Support 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz, bandwidth up to 250MHz.

Specifications

Signal Inputs/Output	
Input DDC Signal	5 volts p-p (TTL)
Maximum Single Link Range	1920X1080p
Output Video	HDMI
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	2.5Gbps/250MHz
Resolutions (HDTV)	
Interlaced (50&60Hz)	480i, 576i, 1080i
Progressive (50&60Hz)	480p, 576p, 720p, 1080p
Mechanical	
Size (L×W×D)	86mm×44mm×16mm
Weight (Net)	42g
Environmental	
Operating Temperature	0°C to +45°C
Operating Humidity	10% to 85% RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90% RH (no condensation)

HDMI Amplifier Switcher


pro-SIGNAL

Power Requirement	
Power consumption (Max)	5W
Warranty	
Limited Warranty	12 Months
Accessories Adapter	
User Manual	English Version

Connection and Operation

- 1) Connect the HDMI input source into the HDMI switcher. (Input cables are optional)
- 2) Press the button to select the inputs
- 3) For too long HDMI cable (over 5 metres), it is recommended to give a 5V DC power supply (optional) to the switch unit.

Connection Diagram

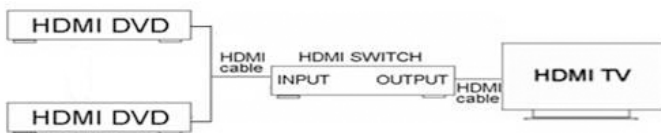

Part Number Table

Description	Part Number
2 to 1 1080p Full HD HDMI Switch	PSG08046
2-Port HDMI Auto Switch	PSG08413

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-SIGNAL