

fleXPower Series



- Industrial / IT & Medical Approvals
- Configurable For Fast Time To Market
- Semi F47 Compliant
- Flexible Series & Parallel Capability
- -20 °C Operation
- Extra Power Available At High Line
- 6 Power Platforms
- Fully Featured Signal Set
- Isolated Signals with Reverse logic Option
- Meets EN60601-1-2 & EN61204-3 For EMC
- FMEA Available
- Optional Fan Speed Control

The fleXPower series is a range of modular power supplies which can be configured into a bespoke solution for quick delivery of samples, prototypes and low volume production.

The range consists of 8 power platforms ranging from 400W to 2400W and 14 modules ranging from 3.3V at 66W to 60V at 750W. The modules can be placed in series or in parallel to give a single output at the chassis rating. Modules of unlike power can be paralleled and will current share within 10%.

Signals are floating and allow for configuration as active low or active high and include AC OK, global DC OK, module DC OK and current monitor. There is a global inhibit signal which can alternatively be configured as a global enable.


fleXPower consists of a chassis of the required power level in which there are 10 slots in versions rated up to 700W, 12 slots for the 900W version, 14 slots for the 1000W version and 16 slots in the 1500 W version. An extra 200W of power is available from X4, X5, X7, X9 & X10 chassis at high line and an extra 1000 W is available from the X15 chassis at high line.

fleXPower chassis can be specified as industrial or medical types. Industrial versions have EN62368 and UL62368 approvals and also meet the requirements of EN61010. Medical versions are approved to EN60601-1 and UL60601-1 and also meet the EMC requirements specified in UL60601-1-2 2nd Edition.


Input Characteristics - X7 Models

| Characteristic | Format | Voltage | Frequency | Minimum | Typical | Maximum | Units | Notes & Conditions |
|--------------------------|--------|---------|-----------|---------|---|---------|-------|------------------------------------|
| Input Voltage AC | | | | 85 | | 264 | VAC | |
| Input Voltage DC | | | | 120 | | 370 | VDC | |
| Input Frequency | | | | 47 | | 63 | Hz | 400 Hz operation. See note 1. |
| Power Factor | Single | 115 V | 50 Hz | | 1.00 | | | See Harmonics Graph 1 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 3 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 2 |
| | | 230 V | 400 Hz | | 0.72 | | | See Harmonics Graph 4 |
| | DD | 115 V | 50 Hz | | 0.99 | | | See Harmonics Graph 5 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 7 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 6 |
| | | 230 V | 400 Hz | | 0.71 | | | See Harmonics Graph 8 |
| Input Current, No Load | Single | 115 V | | | 0.211 | | A | |
| | | 230 V | | | 0.278 | | A | |
| | DD | 115 V | | | 0.422 | | A | |
| | | 230 V | | | 0.556 | | A | |
| Input Current, Full Load | Single | 115 V | | | 7.57 | 9.33 | A | 5.33 A for X4, 6.67 A for X5 |
| | | 230 V | | | 3.77 | 4.67 | A | 2.67 A for X4, 3.33 A for X5 |
| | DD | 115 V | | | 15.14 | 18.66 | A | 10.66 A for X4DD, 13.33 A for X5DD |
| | | 230 V | | | 7.54 | 5.34 | A | 5.33 A for X4DD, 6.66 A for X5DD |
| Inrush Current | Single | 115 V | | | 6.6 | 20 | A | |
| | | 230 V | | | 11.0 | 20 | A | 264 VAC |
| | DD | 115 V | | | 13.2 | 40 | A | |
| | | 230 V | | | 22.0 | 40 | A | 264 VAC |
| Leakage Current | Single | 115 V | | | 205 | | µA | 50 Hz |
| | | 230 V | | | 370 | 1500 | µA | 50 Hz, 200 µA max. for XM |
| | DD | 115 V | | | 410 | | µA | 50 Hz |
| | | 230 V | | | 740 | 3000 | µA | 50 Hz, 400 µA max. for XM |
| Input Protection | | | | | T12A / 250V internal fuse in line and neutral | | | |

1. Class A harmonic current levels, leakage current levels are exceeded.

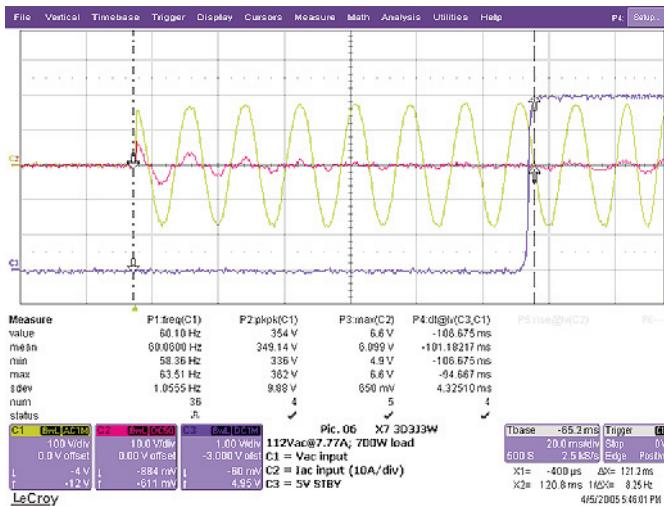

Plot 1. Inrush Current for X7 at 115 VAC


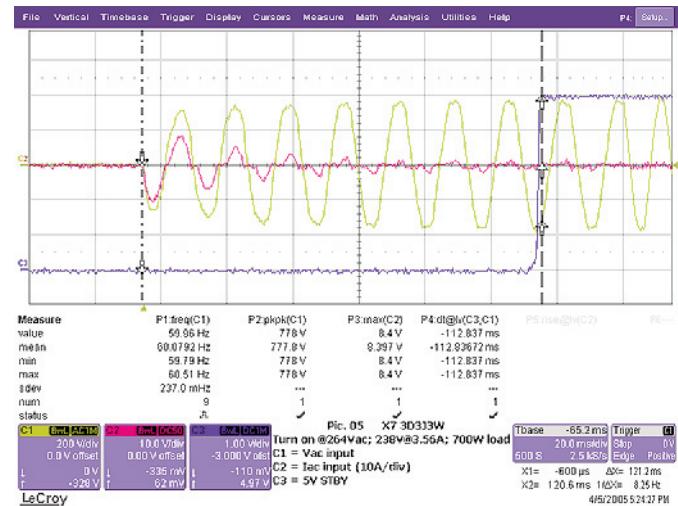


Plot 2. Inrush Current for X7 at 230 VAC

Input Characteristics - X9 Models

| Characteristic | Format | Voltage | Frequency | Minimum | Typical | Maximum | Units | Notes & Conditions |
|--------------------------|--------|---------|-----------|---------|---|---------|-------|-------------------------------|
| Input Voltage AC | | | | 85 | | 264 | VAC | |
| Input Voltage DC | | | | 120 | | 370 | VDC | |
| Input Frequency | | | | 47 | | 63 | Hz | 400 Hz operation. See note 1. |
| Power Factor | Single | 115 V | 50 Hz | | 1.00 | | | See Harmonics Graph 9 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 11 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 10 |
| | | 230 V | 400 Hz | | 0.73 | | | See Harmonics Graph 12 |
| | DD | 115 V | 50 Hz | | 0.99 | | | See Harmonics Graph 13 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 15 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 14 |
| | | 230 V | 400 Hz | | 0.72 | | | See Harmonics Graph 16 |
| Input Current, No Load | Single | 115 V | | | 0.265 | | A | |
| | | 230 V | | | 0.367 | | A | |
| | DD | 115 V | | | 0.530 | | A | |
| | | 230 V | | | 0.734 | | A | |
| Input Current, Full Load | Single | 115 V | | | 9.95 | 12.00 | A | |
| | | 230 V | | | 4.89 | 6.00 | A | |
| | DD | 115 V | | | 19.90 | 24.00 | A | |
| | | 230 V | | | 9.78 | 12.00 | A | |
| Inrush Current | Single | 115 V | | | 10.0 | 40 | A | See Plot 3 |
| | | 230 V | | | 14.0 | 40 | A | 264 VAC. See Plot 4 |
| | DD | 115 V | | | 20.0 | 80 | A | |
| | | 230 V | | | 28.0 | 80 | A | 264 VAC |
| Leakage Current | Single | 115 V | | | 252 | | µA | 50 Hz |
| | | 230 V | | | 512 | 1500 | µA | 50 Hz, 200 µA max. for XM |
| | DD | 115 V | | | 504 | | µA | 50 Hz |
| | | 230 V | | | 1024 | 3000 | µA | 50 Hz, 400 µA max. for XM |
| Input Protection | | | | | T15A / 250V internal fuse in line and neutral | | | |

1. Class A harmonic current levels, leakage current levels are exceeded.

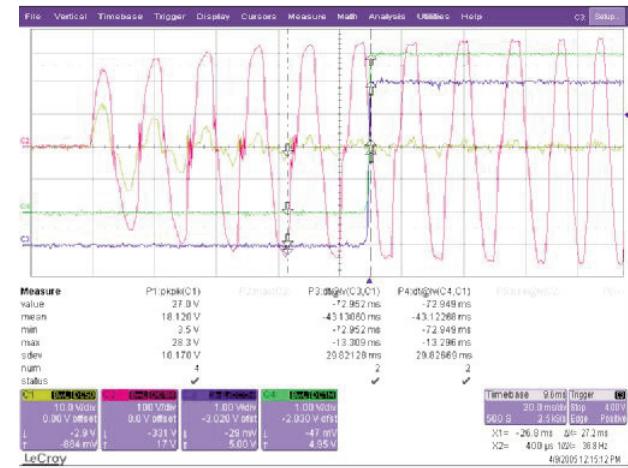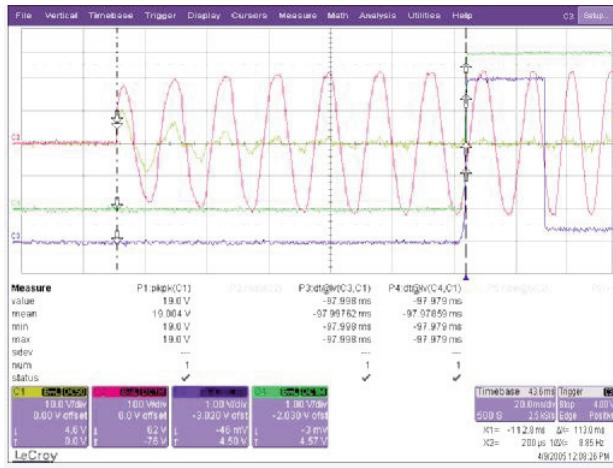


Plot 3. Inrush current for X9 at 115 VAC

Plot 4. Inrush current for X9 at 230 VAC


Input Characteristics - X10 Models

| Characteristic | Format | Voltage | Frequency | Minimum | Typical | Maximum | Units | Notes & Conditions |
|--------------------------|--------|---------|-----------|---------|---|---------|-------|-------------------------------|
| Input Voltage AC | | | | 85 | | 264 | VAC | |
| Input Voltage DC | | | | 120 | | 370 | VDC | |
| Input Frequency | | | | 47 | | 63 | Hz | 400 Hz operation. See note 1. |
| Power Factor | Single | 115 V | 50 Hz | | 1.00 | | | See Harmonics Graph 17 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 19 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 18 |
| | | 230 V | 400 Hz | | 0.73 | | | See Harmonics Graph 20 |
| | DD | 115 V | 50 Hz | | 0.99 | | | See Harmonics Graph 21 |
| | | 115 V | 400 Hz | | 0.97 | | | See Harmonics Graph 23 |
| | | 230 V | 50 Hz | | 0.98 | | | See Harmonics Graph 22 |
| | | 230 V | 400 Hz | | 0.72 | | | See Harmonics Graph 24 |
| Input Current, No Load | Single | 115 V | | | 0.265 | | A | |
| | | 230 V | | | 0.367 | | A | |
| | DD | 115 V | | | 0.530 | | A | |
| | | 230 V | | | 0.734 | | A | |
| Input Current, Full Load | Single | 115 V | | | 9.95 | 13.30 | A | |
| | | 230 V | | | 4.89 | 6.67 | A | |
| | DD | 115 V | | | 19.90 | 26.6 | A | |
| | | 230 V | | | 9.78 | 13.3 | A | |
| Inrush Current | Single | 115 V | | | 10.0 | 40 | A | See Plot 5 |
| | | 230 V | | | 14.0 | 40 | A | 264 VAC. See Plot 6 |
| | DD | 115 V | | | 20.0 | 80 | A | |
| | | 230 V | | | 28.0 | 80 | A | 264 VAC |
| Leakage Current | Single | 115 V | | | 142 | | µA | 50 Hz |
| | | 230 V | | | 281 | 1500 | µA | 50 Hz, 200 µA max. for XM |
| | DD | 115 V | | | 284 | | µA | 50 Hz |
| | | 230 V | | | 562 | 3000 | µA | 50 Hz, 400 µA max. for XM |
| Input Protection | | | | | T20A / 250V internal fuse in line and neutral | | | |

1. Class A harmonic current levels, leakage current levels are exceeded.

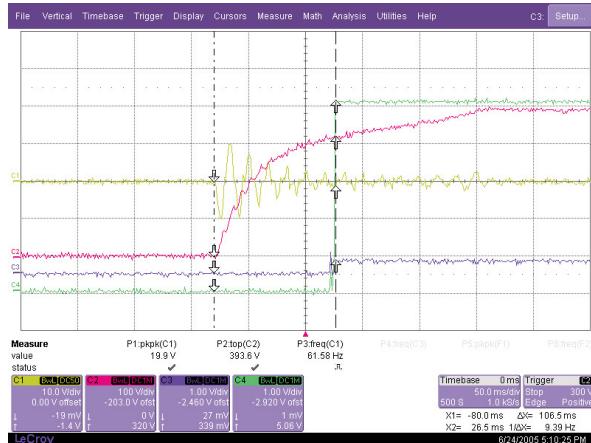

Plot 5. Inrush current for X10 at 115 VAC

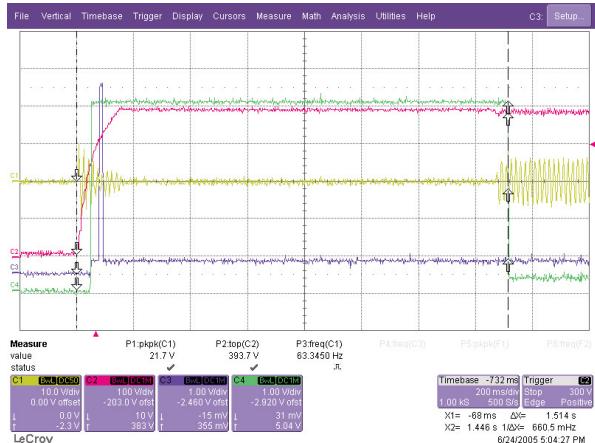


Plot 6. Inrush current for X10 at 230 VAC


Input Characteristics - X15 Models

| Characteristic | Voltage | Frequency | Minimum | Typical | Maximum | Units | Notes & Conditions |
|--------------------------|---------|-----------|---------|---|---------|-------|-------------------------------|
| Input Voltage AC | | | 85 | | 264 | VAC | |
| Input Voltage DC | | | 120 | | 370 | VDC | |
| Input Frequency | | | 47 | | 63 | Hz | 400 Hz operation. See note 1. |
| Power Factor | 120 V | 60 Hz | | 0.997 | | | See Harmonics Graph 27 |
| | 230 V | 60 Hz | | 0.980 | | | See Harmonics Graph 28 |
| Input Current, No Load | 115 V | | | 0.750 | | A | |
| | 230 V | | | 0.700 | | A | |
| Input Current, Full Load | 115 V | | | 16.31 | | A | |
| | 230 V | | | 12.89 | | A | |
| Inrush Current | 115 V | | | 16.50 | 40 | A | See Plot 7 |
| | 230 V | | | 28.00 | 40 | A | 264 VAC. See Plot 8 |
| Input Protection | | | | T30A / 250V internal fuse in line and neutral | | | |

1. Class A harmonic current levels, leakage current levels are exceeded.

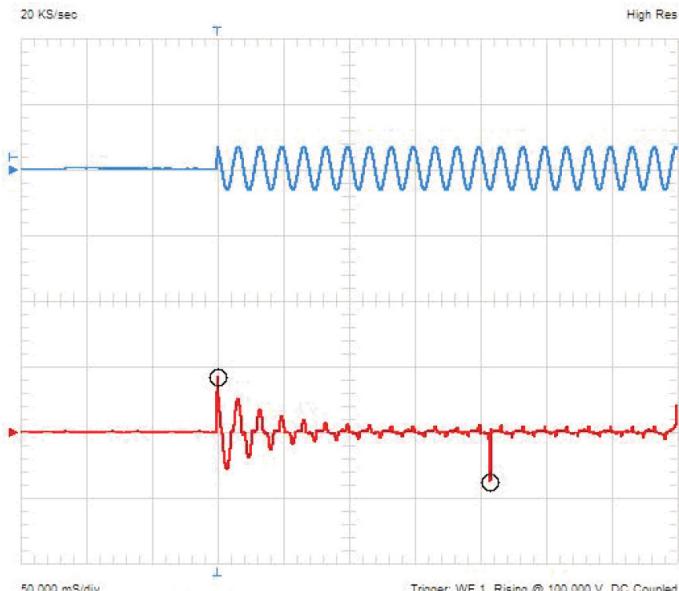

Plot 7. Inrush current for X15 at 115 VAC

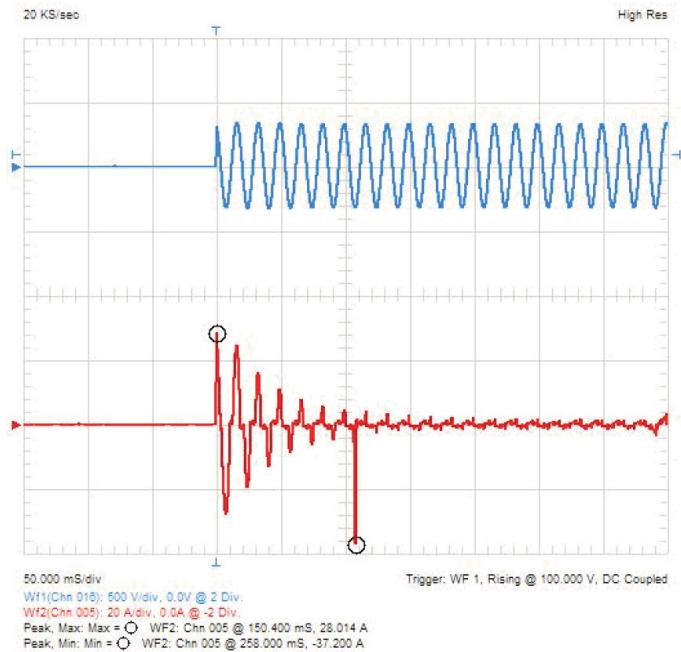


Plot 8. Inrush current for X15 at 230 VAC


Output Characteristics

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|---------|---------|---------|--------|---|
| Voltage | 2 | | 60 | VDC | See modules table |
| Initial Set Accuracy | | | | 0.13% | |
| Voltage Adjustment | ±10 | | | % | ±6 min for 3.3 V output |
| Voltage Programming | ±6 | | | % | -6% apply 0 V, +6% apply 5 V to VProg pin |
| Minimum Load | | 0 | | A | No minimum load required for 2, 3 or 4 slot single output modules and 6 x dual output modules. 2 slot 5 x dual output modules require 10% load on V1 to meet specified regulation on V2 |
| Start Up Delay | | 1.6 | 2 | s | To 90% of nominal output. See Plot 9 |
| Start Up Delay from ROF | | 3 | | ms | |
| Start Up Rise Time | | 37.5 | | ms | See Plot 10 |
| Hold Up Time X7 | 20 | 33.5 | | ms | For X7 with full load. |
| Hold Up Time X7 high line | 20 | 24.35 | | ms | For X7 with 900 W load, high line. |
| Hold Up Time X9 | 20 | 37.5 | | ms | For X9 with full load. |
| Hold Up Time X9 high line | 20 | 30.7 | | ms | For X9 with 1100 W load, high line. |
| Hold Up Time X4 | 20 | 67.0 | | ms | For X4 with full load. |
| Hold Up Time X5 | 20 | 51.0 | | ms | For X5 with full load. |
| Hold Up Time X10 | 20 | 45.2 | | ms | For X10 with full load. |
| Hold Up Time X10 high line | 20 | 44.2 | | ms | For X10 with 1200 W load |
| Hold Up Time X15 | 16 | 44.8 | | ms | For X15 with full load. |
| Hold Up Time X15 high line | 16 | 22.7 | | ms | For X15 with 2500 W load |
| Line Regulation | | 0.01 | 0.1 | % | |
| Load Regulation | | | 1 | % | |
| Transient Response | | 0.7 | ±2 | % | 50-100% load change, recovery time 300 µs |
| Ripple & Noise | | 0.1 | 1.0 | % | 20 MHz BW, 150 MHz BW typical 0.2% 48 V output. 6E module has 1.5% max on V1 and V2, 6N module has 1.5% max on V1 and 3% max on V2 |
| Over Voltage Protection | 115 | 125 | 130 | % | 140% max for 6E and 6N modules. |
| Overload Protection | 110 | | 140 | % | 2x, 3x and 4x modules |
| | 110 | | 150 | | 1x modules |
| | 110 | | 150 | | V1 and 110-200% on V2 of 5x modules |
| | 110 | | 200 | | V1 and V2 of 6x modules |
| Overtemperature Protection | | 115 | | °C | Measured Internally, Auto Resetting |
| Short Circuit Protection | | | | | Continuous auto-resetting |
| Temperature Coefficient | | | 0.03 | % / °C | |
| Parallel Connections | | | | | Via single wire parallel. Dissimilar powers will share within 10%. |
| Housekeeping Voltage | | | | | 5 V/1 A from each chassis |

Plot 9. Start Up Delay

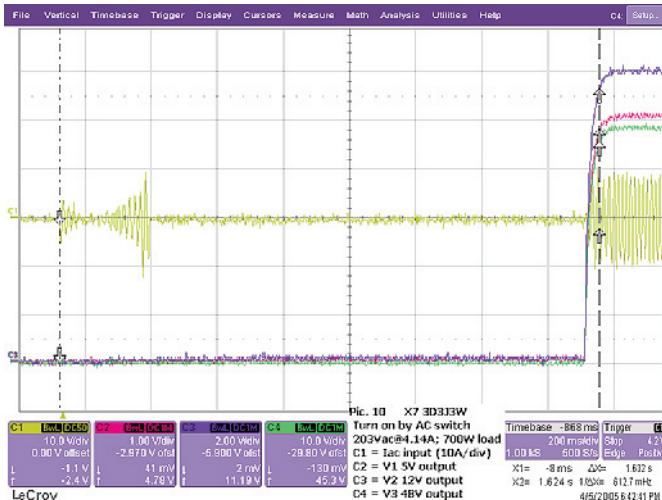

Plot 10. Start Up Rise Time

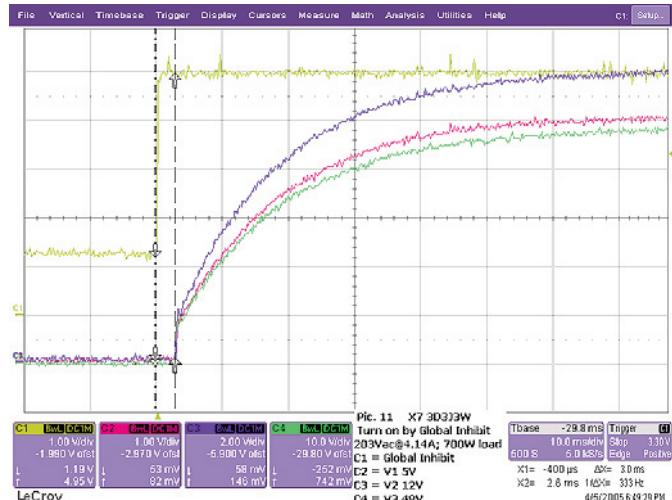

Isolation

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|------------------|---------|---------|---------|-------|--------------------|
| Input to Output | 4000 | | | VAC | |
| Input to Ground | 1500 | | | VAC | |
| Output to Ground | 250 | | | VDC | |

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------------------|---|---------|-------------|-------|--|
| Operating Temperature | -20 | | +70 | °C | Full power to +50 °C, 50% power at +70 °C, -20 °C startup only |
| Reverse Fan Operating Temperature | -20 | | +60 | °C | Full power to +40 °C, 50% power at +60 °C, -20 °C startup only |
| Operating Humidity | 5 | | 95 | % RH | Non-condensing |
| Storage Temperature | -40 | | +85 | °C | |
| Operating Altitude | | | 3000m/4000m | m | Medical/ITE |
| Shock | MIL STD-810 Method 516.4 Procedure 1, 30G, half sine, 6 axes | | | | |
| Vibration | MIL STD-810 Method 514.4 Procedure 1, 1 G rms, 5-500 Hz, 3 axes | | | | |

General

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|---------|---------|-------------|---------|-------------------------------------|
| PFC Switching Frequency | | 65 | | kHz | Housekeeping supply 130 kHz typical |
| Module Switching Frequency | | 200 | | kHz | |
| Weight X7 Chassis | | | 2.75 (1250) | lbs (g) | |
| Weight X9 Chassis | | | 3.3 (1500) | lbs (g) | |
| Weight X10 Chassis | | | 4.0 (1800) | lbs (g) | |
| Weight X15 Chassis | | | 8.0 (3636) | lbs (g) | |
| Weight 2X Module | | | 0.48 (218) | lbs (g) | |
| Weight 3X Module | | | 0.74 (335) | lbs (g) | |
| Weight 4X Module | | | 0.95 (431) | lbs (g) | |
| Power Density X4 | | | 3.2 | W / in³ | |
| Power Density X5 | | | 4.0 | W / in³ | |
| Power Density X7 | | | 5.6 | W / in³ | |
| Power Density X9 | | | 6.0 | W / in³ | |
| Power Density X10, X15 | | | 5.7 | W / in³ | |
| Efficiency | | 83.5% | | | See graphs page 20 |

Reliability

| | Designation | 25 °C | 40 °C | Units | Notes & Conditions |
|----------------|-------------|-----------|---------|-------|---|
| 2 Slot Modules | 2D | 1,211,340 | 735,321 | Hours | MTBF calculation assumptions: 1) All SMD resistors are considered 10K. 2) Quality level is Lower(hermetically) for transistor and diode by default unless higher quality is mentioned. 3) Non-ER' is used in quality level of capacitor and resistor during the calculation. 4) Commercial' is used in quality level of IC and Relay during the calculation. 5) Special correction factor as 0.01 was used in Q1 and Q2 of the X7,X9 due to the improper module of the software. 6) Fans are not considered during the calculation. |
| | 2J | 1,221,690 | 736,597 | Hours | |
| | 2P | 1,158,754 | 697,325 | Hours | |
| | 2R | 895,129 | 532,978 | Hours | |
| | 2W | 1,160,350 | 699,271 | Hours | |
| 3 Slot Modules | 5X | 748588 | 521,751 | Hours | |
| | 3C | 1,160,350 | 707,221 | Hours | |
| | 3D | 1,196,651 | 728,751 | Hours | |
| | 3J | 1,321,184 | 740,414 | Hours | |
| | 3L | 1,207,620 | 730,995 | Hours | |
| | 3P | 1,205,278 | 729,020 | Hours | |
| | 3Q | 1,210,351 | 731,751 | Hours | |
| | 3R | 569,600 | 382,000 | Hours | |
| | 3U | 1,198,520 | 725,096 | Hours | |
| | 3W | 1,192,223 | 720,847 | Hours | |
| 4 Slot Modules | All modules | 460,029 | 327,176 | Hours | |
| Chassis | X4 | 843,674 | 507,459 | Hours | |
| | X5 | 843,674 | 507,459 | Hours | |
| | X7 | 599,009 | 320,296 | Hours | |
| | X9 | 559,615 | 336,507 | Hours | |
| | X10 | 527,132 | 316,918 | Hours | |
| | X15 | 181,127 | 126,133 | Hours | |

To calculate the MTBF of your configuration, select the individual MTBF for each modules and use the calculation below to derive total MTBF.

$$\frac{\text{MTBF}_{\text{TOTAL}}}{\text{MTBF}_{\text{TOTAL}}} = \frac{\text{MTBF}_1}{\text{MTBF}_1} + \frac{\text{MTBF}_2}{\text{MTBF}_2} + \dots + \frac{\text{MTBF}_n}{\text{MTBF}_n}$$

Safety Approvals

| Safety Agency | Safety Standard | Category |
|---------------|---|------------------------|
| CB Report | IEC60950-1:2005 Ed 2 / IEC62368-1:2014 | Information Technology |
| | IEC60601-1 Ed 3 Including Risk Management | Medical (XM Models) |
| UL | UL 62368-1 & CAN/CSA C22.2 No. 62368-1-14 | Information Technology |
| | UL File # E146893, ANSI/AAMI ES 60601-1:2005 & CSA C22.2 No. 60601-1:08 | Medical (XM Models) |
| EN | EN62368-1:2014/A11:2017 | Information Technology |
| | EN60601-1:2006 | Medical (XM Models) |
| CE | Meets all applicable directives | |
| UKCA | Meets all applicable legislation | |

| Means of Protection | | Category |
|----------------------|--|-----------------|
| Primary to Secondary | 2 x MOPP (Means of Patient Protection) | |
| Primary to Earth | 1 x MOPP (Means of Patient Protection) | IEC60601-1 Ed 3 |

| Equipment Protection Class | Safety Standard | Notes & Conditions |
|----------------------------|--|---|
| Class I | IEC60950-1:2005 Ed 2 / IEC62368-1:2014 & IEC60601-1 Ed 3 | See safety agency conditions of acceptability for details |

Electromagnetic Compatibility - Immunity

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|-------------------------|---------------------------|------------|----------|---------------------------------|
| ESD | EN61000-4-2 | 4 | A | |
| EFT | EN61000-4-4 | 3 | A | |
| Radiated | EN61000-4-3 | 10 V/m | A | |
| Surges | EN61000-4-5 | 3 | A | |
| Conducted | EN61000-4-6 | 10 V/m | A | |
| Dips and Interruptions | EN61000-4-11 | 70% Ut | A | For 10 ms, 100% load |
| | | 40% Ut | B | For 100 ms, 100% load |
| | | 0% Ut | B | For 5000 ms, 100% load |
| Dips and Interruptions* | EN61000-4-11 (Medical) | 70% Ut | A | For 500 ms, Medical, 100% load |
| | | 40% Ut | A | For 100 ms, Medical, 60% load |
| | | 0% Ut | A | For 10 ms, Medical, 100% load |
| | | 0% Ut | B | For 5000 ms, Medical, 100% load |


Complies with EN60601-1-2 for medical equipment, and EN61204-3 for IT equipment. *(EN60601-1-2 available as option)

Electromagnetic Compatibility - Emissions

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|-----------------------|-------------|------------|----------|--------------------|
| Conducted (X models) | EN55032 | Class B | | |
| Conducted (XM models) | EN55011 | Class A | | |
| Radiated | EN55032 | Class A | | |
| Harmonic Currents | EN61000-3-2 | Class A | | |
| Voltage Fluctuations | EN61000-3-3 | | | |

Complies with EN60601-1-2 for medical equipment, and EN61204-3 for IT equipment.

Conducted Emissions

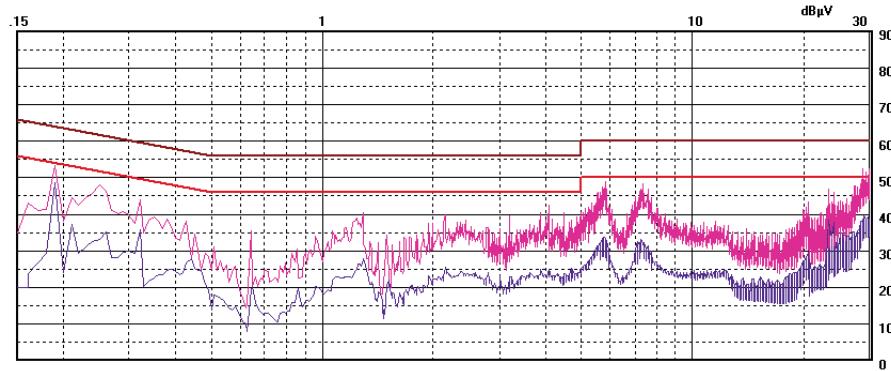

Limit #1: 55022bav Limit #2: 55022bqp Detector: Peak, Average
flexpower x7-3l3q2d half load v1 1v65 v2 4/4 v3 r11

Peak and average emissions for X7-3L3Q2D configuration against Class B limits

Configuration - Model Number Construction

The fleXPower range allows for simple configuration of a custom modular power supply with up to twenty outputs. The chassis consists of either ten, twelve or fourteen slots, and modules are either two, three or four slots wide. Please refer to next page for specific X15 configuration information.

| CHASSIS | OUTPUT MODULES 1-5 (1-6: 900 W chassis/ 1-7: 1000 W chassis) | | | | | | | OPTIONS |
|-----------|--|--------|--------|--------|--------|-------|-------|---------------|
| | MOD.1 | MOD.2 | MOD.3 | MOD.4 | MOD.5 | MOD.6 | MOD.7 | |
| X X X X X | - | | | | | | | - P P S S + + |
| | | | | | | | | |
| | | | | | | | | |
| Model | | Sector | | Vinput | | | | |
| | | | | 115 V | | 230 V | | Slots |
| | | | | Pnom | Ppk* | Pnom | Ppk* | |
| X4 | Industrial | 400 W | 800 W | 600 W | 1200 W | 10 | | |
| XM4 | Medical | 400 W | 800 W | 600 W | 1200 W | 10 | | |
| X5 | Industrial | 500 W | 800 W | 700 W | 1200 W | 10 | | |
| XM5 | Medical | 500 W | 800 W | 700 W | 1200 W | 10 | | |
| X7 | Industrial | 700 W | 800 W | 900 W | 1200 W | 10 | | |
| XM7 | Medical | 700 W | 800 W | 900 W | 1200 W | 10 | | |
| X9 | Industrial | 900 W | 1100 W | 1100 W | 1500 W | 12 | | |
| XM9 | Medical | 900 W | 1100 W | 1100 W | 1500 W | 12 | | |
| X10 | Industrial | 1000 W | 1300 W | 1200 W | 1600 W | 14 | | |
| XM10 | Medical | 1000 W | 1300 W | 1200 W | 1600 W | 14 | | |
| X15 | Industrial | 1500 W | 1500 W | 2500 W | 2500 W | 20 | | |
| XM15 | Medical | 1500 W | 1500 W | 2500 W | 2500 W | 20 | | |

Note: Peak power available for 10 seconds with 35% duty cycle.

Step 1

To configure your fleXPower unit, select the required output power and application type. fleXPower chassis are available in five industrial and five medical power formats, detailed above.

Step 2

FleXPower can accommodate up to seven modules, resulting in an extensive range of output combinations. However, as all modules are designed to fit across either 2, 3 or 4 slots in the chassis, configuration is very simple. Select the appropriate modules for your output requirements, ensuring that all modules will fit in the chassis. X4, X5 and X7 chassis have the capacity to accept up to two 4 series modules. X9 and X10 chassis will accept up to three 4 series modules, and X15 chassis will accept up to four 4 series modules, max of 2 each per bay. First, insert 4 series modules, ordered lowest voltage to highest. Next in order, insert 3 series modules, ordered by the lowest voltage for same module width. Follow with 2 series single output, lowest voltage to highest voltage, then 5 series multi-output, ordered alphabetically a-z. Then 1 series, single output modules, lowest voltage to highest

Step 3

Add any required options. These are grouped into three types; parallel options, series options and other options. The standard signal set for each chassis includes Global Inhibit, Global DC OK and Global AC OK, each having logic 0 operation. Optionally a logic 1 operating version of each is available along with reverse air flow. Also available is a fan speed control card option, which is available separately or combined with previously listed options.

Example

X7-3C3L2C-002316

Leave blank if no options are required

X7 - 700 W industrial chassis, module slots available.

3C - 3.3 V @ 60.0 A. Three slot width module.

3L - 15.0 V @ 20.0 A. Three slot width module.

2C - 3.3 V @ 40.0 A. Two slot width module.

00 - No parallel option.

23 - Modules 2 and 3 in series to give 18.3 V @ 20.0 A.

16 - Fan speed control card.

| Single Output - Module Voltage/Current Rating | | | | | | |
|---|---------|--------|-------|-------|-------|-------------------|
| Voltage | Current | Ipk | Power | Ppk | Slots | Code |
| 3.3V | 20.0 A | n/a | 66 W | n/a | 2 | 1C |
| 3.3V | 40.0 A | n/a | 132 W | n/a | 2 | 2C |
| 3.3V | 60.0 A | n/a | 198 W | n/a | 3 | 3C |
| 5.0V | 20.0 A | n/a | 100 W | n/a | 2 | 1D |
| 5.0V | 40.0 A | n/a | 200 W | n/a | 2 | 2D |
| 5.0V | 60.0 A | n/a | 300 W | n/a | 3 | 3D |
| 12.0V | 8.50 A | n/a | 102 W | n/a | 2 | 1J |
| 12.0V | 17.0 A | n/a | 204 W | n/a | 2 | 2J |
| 12.0V | 25.0 A | n/a | 300 W | n/a | 3 | 3J |
| 12.0V | 62.5 A | n/a | 750 W | n/a | 4 | 4J |
| 15.0V | 7.00 A | n/a | 105 W | n/a | 2 | 1L |
| 15.0V | 14.0 A | n/a | 210 W | n/a | 2 | 2L |
| 15.0V | 20.0 A | n/a | 300 W | n/a | 3 | 3L |
| 15.0V | 50.0 A | n/a | 750 W | n/a | 4 | 4L |
| 24.0V | 5.00 A | n/a | 120 W | n/a | 2 | 1P |
| 24.0V | 10.5 A | n/a | 252 W | n/a | 2 | 2P |
| 24.0V | 17.0 A | n/a | 408 W | n/a | 3 | 3P |
| 24.0V | 31.5 A | n/a | 750 W | n/a | 4 | 4P |
| 24.0V | 5.00 A | 10.0 A | 120 W | 240 W | 2 | 1R ⁽¹⁾ |
| 24.0V | 10.5 A | 21.0 A | 252 W | 504 W | 2 | 2R ⁽¹⁾ |
| 24.0V | 17.0 A | 34.0 A | 408 W | 816 W | 3 | 3R ⁽¹⁾ |
| 28.0V | 4.50 A | n/a | 126 W | n/a | 2 | 1Q |
| 28.0V | 9.00 A | n/a | 252 W | n/a | 2 | 2Q |
| 28.0V | 14.0 A | n/a | 392 W | n/a | 3 | 3Q |
| 28.0V | 26.8 A | n/a | 750 W | n/a | 4 | 4Q |
| 36.0V | 3.50 A | n/a | 126 W | n/a | 2 | 1U |
| 36.0V | 7.00 A | n/a | 252 W | n/a | 2 | 2U |
| 36.0V | 11.0 A | n/a | 396 W | n/a | 3 | 3U |
| 36.0V | 21.0 A | n/a | 750 W | n/a | 4 | 4U |
| 42.0V | 9.05 A | n/a | 400 W | n/a | 3 | 3V |
| 48.0V | 2.50 A | n/a | 120 W | n/a | 2 | 1W |
| 48.0V | 5.20 A | n/a | 249 W | n/a | 2 | 2W |
| 48.0V | 8.50 A | n/a | 408 W | n/a | 3 | 3W |
| 48.0V | 15.7 A | n/a | 750 W | n/a | 4 | 4W |
| 60.0V | 2.00 A | n/a | 120 W | n/a | 2 | 1Y |
| 60.0V | 4.20 A | n/a | 252 W | n/a | 2 | 2Y |
| 60.0V | 7.00 A | n/a | 420 W | n/a | 3 | 3Y |
| 60.0V | 12.5 A | n/a | 750 W | n/a | 4 | 4Y |

1. Peak power available for 10 seconds with 35% duty cycle, if peak power rating is exceeded output may latch, recycle input to reset.

| Dual Output - Module Voltage/Current Rating | | | | | | |
|---|---------|----------|---------|-------|------|--|
| Output 1 | | Output 2 | | Slots | Code | |
| Voltage | Current | Voltage | Current | | | |
| 5.0V | 10.0 A | 5.0V | 10.0 A | 2 | 5A | |
| 5.0V | 10.0 A | 3.3V | 10.0 A | 2 | 5B | |
| 12.0V | 10.0 A | 12.0V | 8.0 A | 2 | 5D | |
| 15.0V | 8.0 A | 15.0V | 6.0 A | 2 | 5E | |
| 15.0V | 8.0 A | 15.0V | 6.0 A | 2 | 6E* | |
| 15.0V | 8.0 A | 12.0V | 8.0 A | 2 | 5F | |
| 12.0V | 10.0 A | 5.0V | 10.0 A | 2 | 5G | |
| 12.0V | 10.0 A | 3.3V | 10.0 A | 2 | 5H | |
| 12.0V | 10.0 A | 2.0V | 10.0 A | 2 | 5J | |
| 15.0V | 10.0 A | 5.0V | 10.0 A | 2 | 5K | |
| 15.0V | 10.0 A | 3.3V | 10.0 A | 2 | 5L | |
| 15.0V | 10.0 A | 2.0V | 10.0 A | 2 | 5M | |
| 24.0V | 6.0 A | 5.0V | 10.0 A | 2 | 5N | |
| 24.0V | 6.0 A | 5.0V | 10.0 A | 2 | 6N* | |
| 24.0V | 6.0 A | 3.3V | 10.0 A | 2 | 5P | |
| 24.0V | 6.0 A | 2.0V | 10.0 A | 2 | 5Q | |

*No minimum load needed on output 1 for regulation

| Parallel Option Codes | |
|-----------------------|----------------------|
| Code | Description |
| 00 | No parallel required |
| 12 | Modules 1 & 2 |
| 13 | Modules 1 to 3 |
| 14 | Modules 1 to 4 |
| 23 | Modules 2 & 3 |
| 24 | Modules 2 to 4 |
| 25 | Modules 2 to 5 |
| 34 | Modules 3 & 4 |
| 35 | Modules 3 to 5 |
| 40 | Modules 1 & 2, 3 & 4 |


| Series Option Codes | |
|---------------------|----------------------|
| Code | Description |
| 00 | No series required |
| 12 | Modules 1 & 2 |
| 13 | Modules 1 to 3 |
| 23 | Modules 2 & 3 |
| 24 | Modules 2 to 4 |
| 40 | Modules 1 & 2, 3 & 4 |

| Other Option Codes | |
|--------------------|----------------------------|
| Code | Description |
| 01 | Reverse Air |
| 02 | Global Enable - Logic 1 |
| 03 | Option 01 & 02 |
| 04 | Global DC OK - Logic 1 |
| 05 | Option 01 & 04 |
| 06 | Option 02 & 04 |
| 07 | Option 01, 02 & 04 |
| 08 | Global AC OK - Logic 1 |
| 09 | Option 01 & 08 |
| 10 | Option 02 & 08 |
| 11 | Option 01, 02 & 08 |
| 12 | Option 04 & 08 |
| 13 | Option 01, 04 & 08 |
| 14 | Option 02, 04 & 08 |
| 15 | Option 01, 02, 04 & 08 |
| 16 | Fan Speed Control |
| 17 | Option 01 & 16 |
| 18 | Option 02 & 16 |
| 19 | Option 04 & 16 |
| 20 | Option 08 & 16 |
| 21 | Option 01, 02 & 16 |
| 22 | Option 01, 04 & 16 |
| 23 | Option 01, 08 & 16 |
| 24 | Option 02, 04 & 16 |
| 25 | Option 02, 08 & 16 |
| 26 | Option 04, 08 & 16 |
| 27 | Option 01, 02, 04 & 16 |
| 28 | Option 01, 02, 08 & 16 |
| 29 | Option 02, 04, 08 & 16 |
| 30 | Option 01, 02, 04, 08 & 16 |

Note: Fancard options 16-30 will occupy 2 slots.

Note: All options also applicable to X15

X15 Configuration Rules

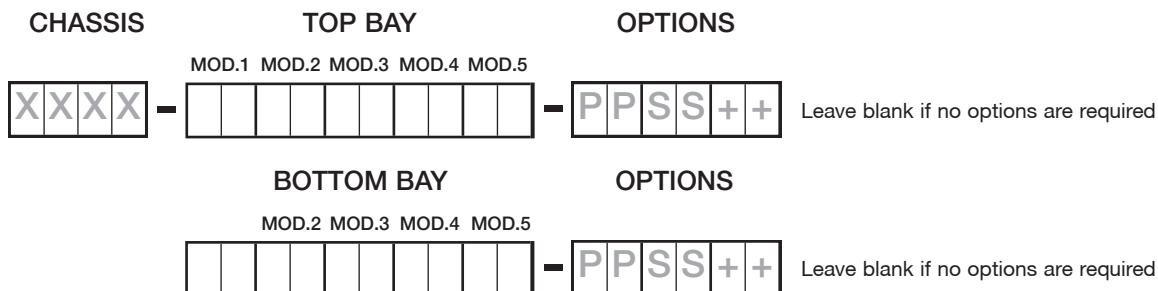

- Configuration for X15 is Chassis - Top Bay - Options
Bottom Bay - Options
- Modules for each bay are configured same as X4, X5, X7, X10.
- Maximum 1250W for each bay, power to be evenly distributed between top and bottom bays.
- Option codes within each bay is the same as X4 to X10.
- Fan control card mounts on bottom bay standard. For other mount location contact sales.
- 1st and 2nd digits = parallel like voltages, including vertical parallel.
- 3rd and 4th digits = series option designation.
- 5th and 6th digits = other option codes. (5th and 6th digits fan card options 16 to 30 is called out for one bay only, either top or bottom).

| Vertical Parallel Option Codes | |
|--------------------------------|---|
| Code | Description |
| 61 | Parallel module 1 to module 1 top and bottom |
| 62 | Parallel module 2 to module 2 top and bottom |
| 63 | Parallel module 3 to module 3 top and bottom |
| 64 | Parallel module 4 to module 4 top and bottom |
| 65 | Parallel module 5 to module 5 top and bottom |
| 91 | Parallel module 1 to module 1 top and bottom, plus parallel code 12 top bay |
| 92 | Parallel module 1 to module 1 top and bottom, plus parallel code 12 top & 12 bottom bay |
| 93 | Parallel module 1 to module 1 top and bottom, plus parallel code 13 top & 12 bottom bay |
| 94 | Parallel module 2 to module 2 top and bottom, plus parallel code 23 top bay |
| 95 | Parallel module 2 to module 2 top and bottom, plus parallel code 23 top & 23 bottom bay |
| 96 | Parallel module 2 to module 2 top and bottom, plus parallel code 24 top & 24 bottom bay |
| 97 | Parallel module 3 to module 3 top and bottom, plus parallel code 34 top bay |
| 98 | Parallel module 3 to module 3 top and bottom, plus parallel code 34 top & 34 bottom bay |

Notes

1. All information and options described on the previous page are also valid for x15, including options codes as listed.

Example 1

- 5V @ 200A, 24V @ 10.5A, 48V @ 5.2A, 12V @ 10A, 2V @ 10A, with fan speed control

X15-3D2D2P5J-91
3D2D2W-120016

Front End & Top Bay & Options

X15-3D2D2P5J-91

X15 - 2500 W industrial chassis, 20 module slots
configured as 2 bays of 10 slots each.

3D - 5.0V @ 60.0 A. Three slot width module.

2D - 5.0V @ 40.0 A. Two slot width module.

2P - 24 V @ 10.5 A. Two slot width module.

5J - 12 V @ 10.0 A., 2 V @ 10.0 A. Two slot width module.

91 - Vertical parallel module 1 top bay to module 1 bottom bay
plus parallel modules 1 and 2 top bay

Bottom Bay & Options

3D2D2W-120016

3D - 5.0V @ 60.0 A. Three slot width module

2D - 5.0V @ 40.0 A. Two slot width module

2W - 48V @ 5.2 A. Two slot width module

12 - Parallel modules 1 and 2, bottom bay

00 - No series option

16 - Fan speed control card




flexPower
X15-3D2D2P5J-91/3D2D2W-120016

| INPUT J2 LOGIC CONNECTOR | |
|--------------------------|-------------|
| 1 GL INH- | 6 GL ACOK C |
| 2 GL INH+ | 7 5V SB |
| 3 GL DCOK E | 8 5V SB RTN |
| 4 GL DCOK C | 9 INH SUM |
| 5 GL ACOK E | 10 -VCC |

| MODULE LOGIC CONNECTOR DUAL OUTPUT | |
|---------------------------------------|--------------|
| 1 +SENSE V1 | 6 +INHIBIT |
| 2 -SENSE V1 | 7 -INHIBIT |
| 3 NOT USED | 8 +DCOK |
| 4 I_SHARE | 9 -DCOK |
| 5 +SENSE V2 | 10 -SENSE V2 |

| MODULE LOGIC CONNECTOR SINGLE OUTPUT | |
|---|-------------|
| 1 +SENSE V1 | 6 +INHIBIT |
| 2 -SENSE V1 | 7 -INHIBIT |
| 3 V_PROG | 8 +DCOK |
| 4 I SHARE | 9 -DCOK |
| 5 NOT USED | 10 NOT USED |

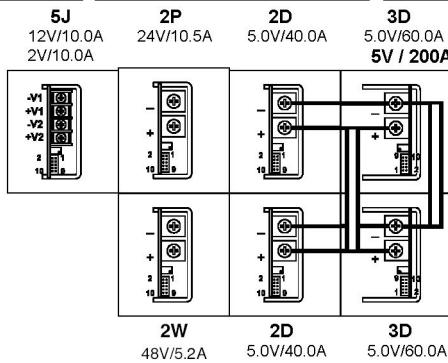

Example 2

- 5V @ 160A, 5V @ 40A, 48V @ 5.2A, 12V@ 10A, 2V @ 10A, with fan speed control

X15-3D2D5J-61
3D2D2W-120016

Front End & Top Bay & Options

X15-3D2D5J-61

X15 - 2500 W industrial chassis, 20 module slots
configured as 2 bays of 10 slots each.

3D - 5.0 V @ 60.0 A. Three slot width module.

?D - 5.0 V @ 40.0 A Two slot width module.

5.1 - 12V@10.0A 2V@10.0A Two slot width dual output module

61 - Vertical parallel module 1 top bay to module 1 bottom bay

1

Bottom Bay & Options

3D2D2W-120016

3D - 5.0 V @ 60.0 A Three slot width module

3D - 5.0 V @ 40.0 A Two slot width module


3W - 48 V @ 5.3 A Two slot width module

12 Parallel modules 1 and 2, bottom bay

12 - Parallel modules

00 - No series option

16 - Fan speed control card

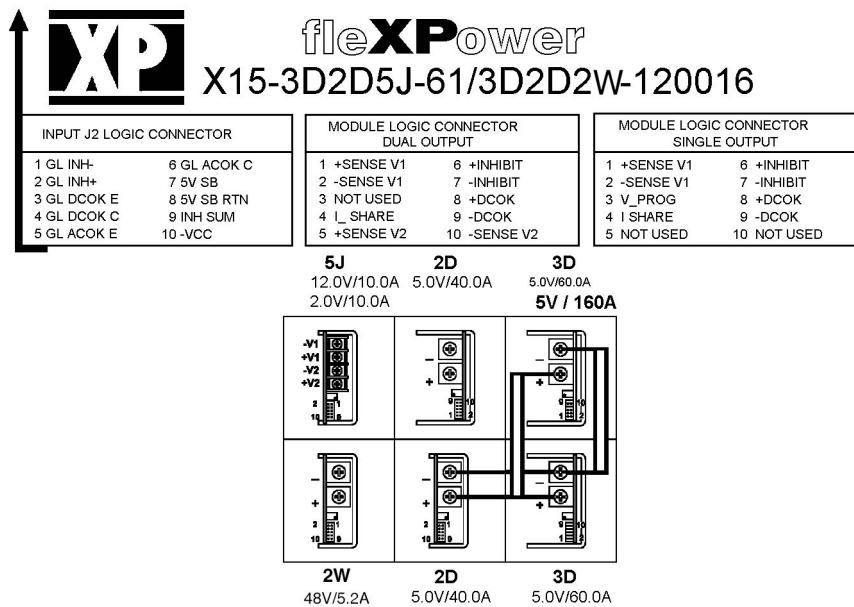


Signals

Global AC OK/Power Fail

Global AC OK is an open collector signal providing a minimum of 5 ms warning of loss of output regulation. The signal is fully isolated and the collector and emitter must be connected externally.


Maximum sink current 2 mA, maximum voltage 20 V.
On dual output module, DC OK monitors V1 output only.

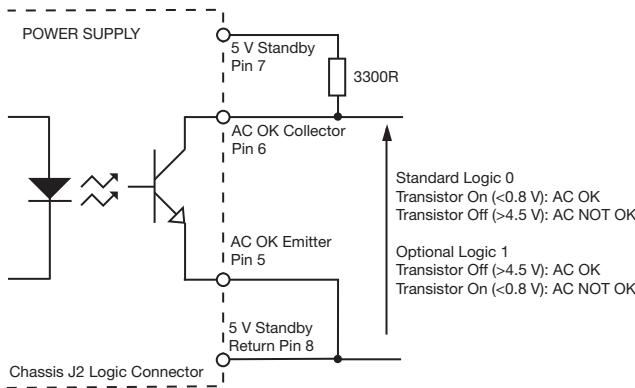

Global DC OK


Global DC OK is an open collector signal providing warning that the output voltage has fallen below 90% of nominal. The signal is fully isolated and the collector and emitter must be connected externally.

Maximum sink current 2 mA, maximum voltage 20 V.
On dual output module, DC OK monitors V1 output only.

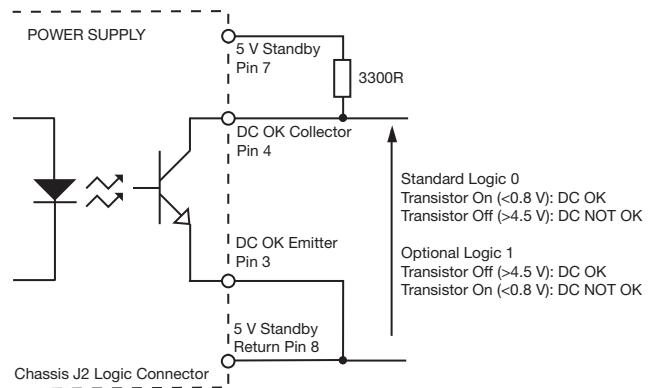


Global Inhibit

Global Inhibit is an isolated control signal which can turn the power supply off by supplying 2 to 5mA into the pin. Global Enable option available, see 'Other Option Codes' table.

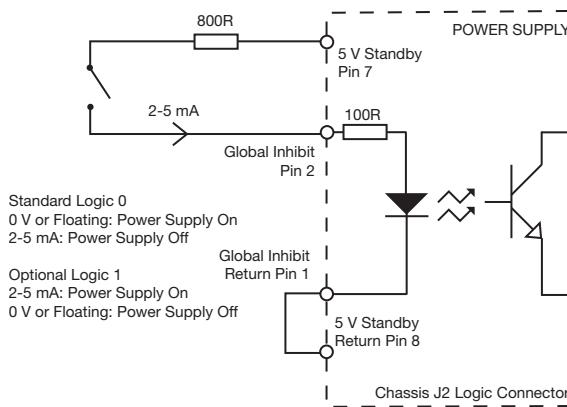

Fan Fail


When fan speed control fitted (option 16).
Open connector signal warns of any fan failure.
Note: Can use 5V standby for 5V EXT.

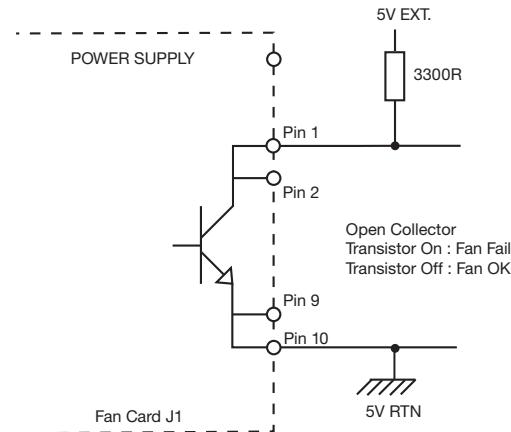

Module DC OK


Module DC OK is a nominal "ON" floating collector and emitter transistor of an optocoupler, which provides a warning of the loss of output regulation on the main output of the module.

Maximum sink current 2 mA, maximum voltage 20 V.

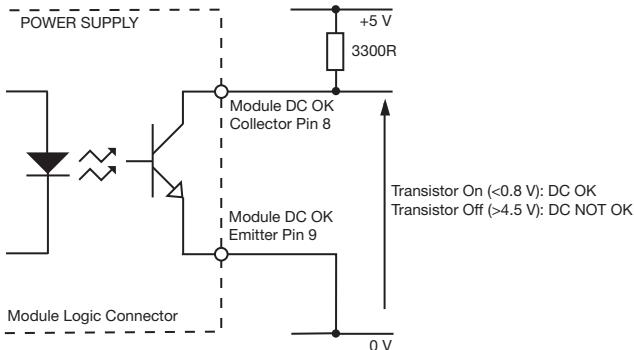


Module Inhibit

Module Inhibit signal is an isolated control signal which can turn the module off by supplying 2 to 5 mA into the pin.

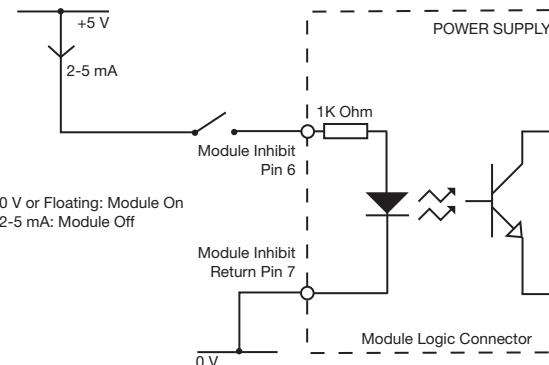

Current Share


Connecting pins 2 and 4 of like voltage modules (4 maximum) within the same chassis or separate chassis will force the current to share between the outputs. Different slot width modules can share.

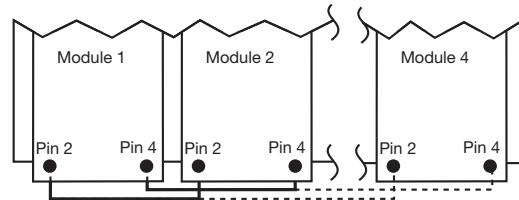


Module Mechanical Details

Single Output


2 Slot Modules

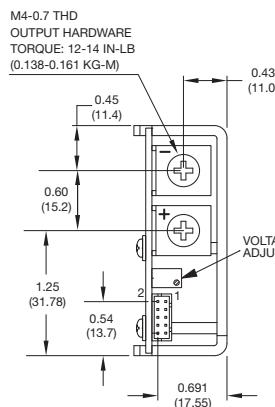


2 Slot Modules (1R/2R Peak)



3 Slot Modules (3R Peak)



4 Slot Modules

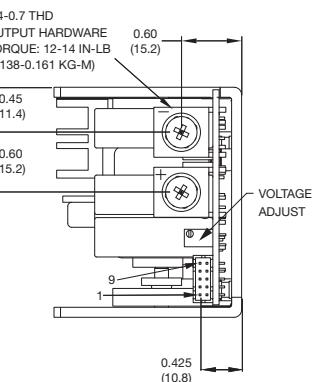

| Single Output: Module Logic Connector Pinouts | | | |
|---|----------|-----|-----------------------|
| Pin | Function | Pin | Function |
| 1 | Sense + | 6 | Inhibit |
| 2 | Sense - | 7 | Module Inhibit Return |
| 3 | V Prog | 8 | DC OK Collector |
| 4 | I Share | 9 | DC OK Emitter |
| 5 | Not used | 10 | Not used |


Notes

- All dimensions in inches (mm).
- Tolerance: $x.xx = \pm 0.02 (\pm 0.50)$, $x.xxx = \pm 0.01 (\pm 0.25)$
- Weight: 2 / 2R Slot : 0.48 lb (218 g) approx,
- 3 Slot : 0.74 lb (335 g) approx.
- 4 Slot: 0.95 lb (431 g) approx.

- Mating plug: JST p/n PHDR-10VS.
- Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.

Dual Output

2 Slot Modules

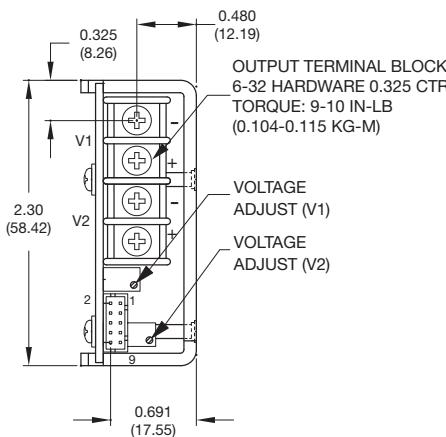

| Dual Output: Module Logic Connector Pinouts | |
|---|-----------------------|
| Pin | Function |
| 1 | V1 Sense + |
| 2 | V1 Sense - |
| 3 | Not used |
| 4 | Not used |
| 5 | V2 Sense + |
| 6 | Inhibit |
| 7 | Module Inhibit Return |
| 8 | DC OK Collector |
| 9 | DC OK Emitter |
| 10 | V2 Sense - |


Notes

- All dimensions in inches (mm).
- Tolerance: $x.xx = \pm 0.02 (\pm 0.50)$, $x.xxx = \pm 0.01 (\pm 0.25)$
- Weight: 0.48 lb (218 g) approx.
- Mating plug: JST p/n PHDR-10VS.
- Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.

Fan Speed Control Module

2 Slot Module





Controls speed of fan(s) depending on output load and thermal environment of the power supply. Also provides warning of any fan failure.



| Fan Speed Control Module Connector Pinouts | |
|--|----------|
| Pin | Function |
| 1 | Fan Fail |
| 2 | Fan Fail |
| 3 | Not Used |
| 4 | Not Used |
| 5 | Not Used |
| 6 | Not Used |
| 7 | Not Used |
| 8 | Not Used |
| 9 | Ground |
| 10 | Ground |


Notes

- All dimensions in inches (mm).
- Tolerance: $x.xx = \pm 0.02 (\pm 0.50)$, $x.xxx = \pm 0.01 (\pm 0.25)$
- Mating plug: JST p/n PHDR-10VS.
- Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.

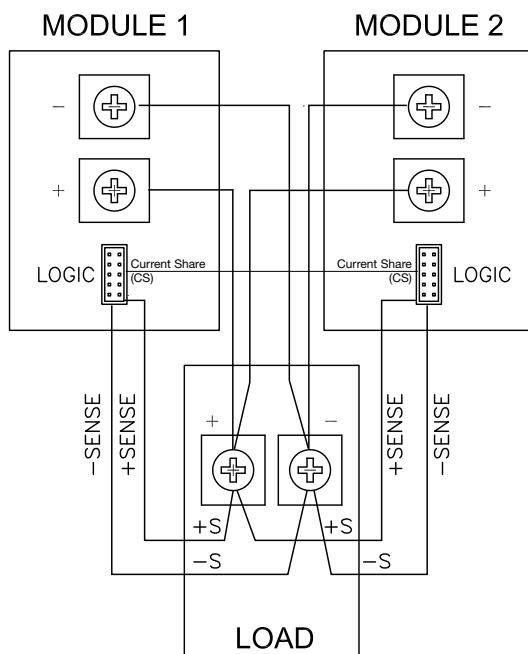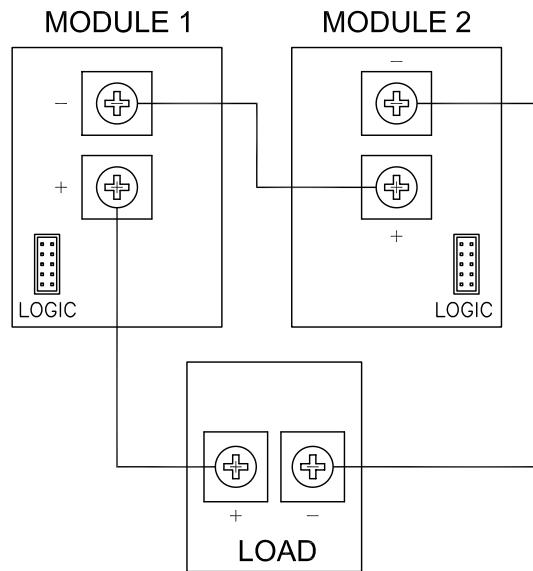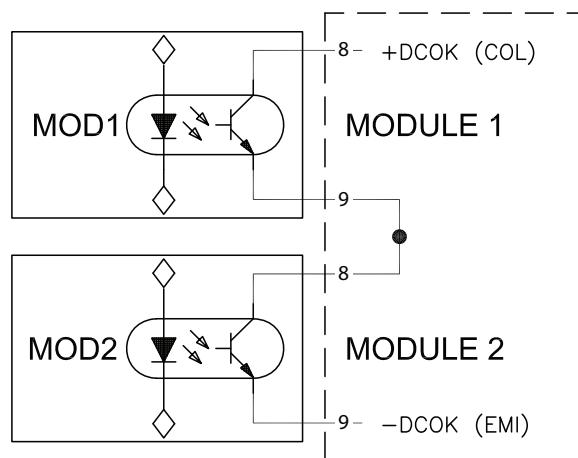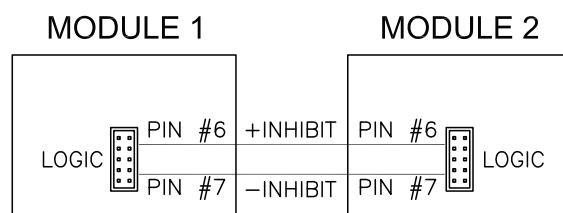
Parallel Connection**Series Connection****Use of DC OK Signal for Modules in Parallel or Series****Use of Module Inhibit for Modules in Parallel or Series**

Mechanical Details

400 (600)⁽⁴⁾ Watt X4 & XM4 Chassis, 500 (700)⁽⁴⁾ Watt X5 & XM5 Chassis, 700 (900)⁽⁴⁾ Watt X7 & XM7 Chassis

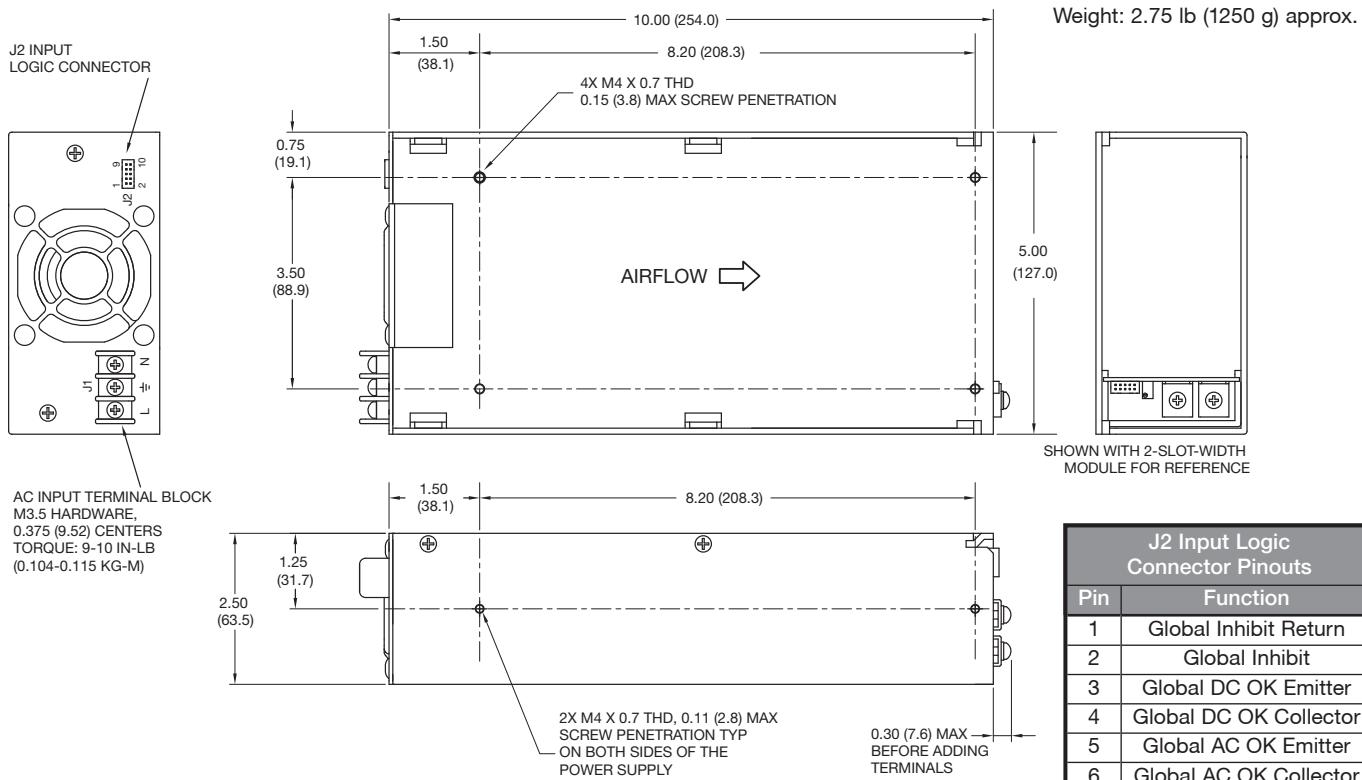

900 (1100)⁽⁴⁾ Watt X9 & XM9 Chassis

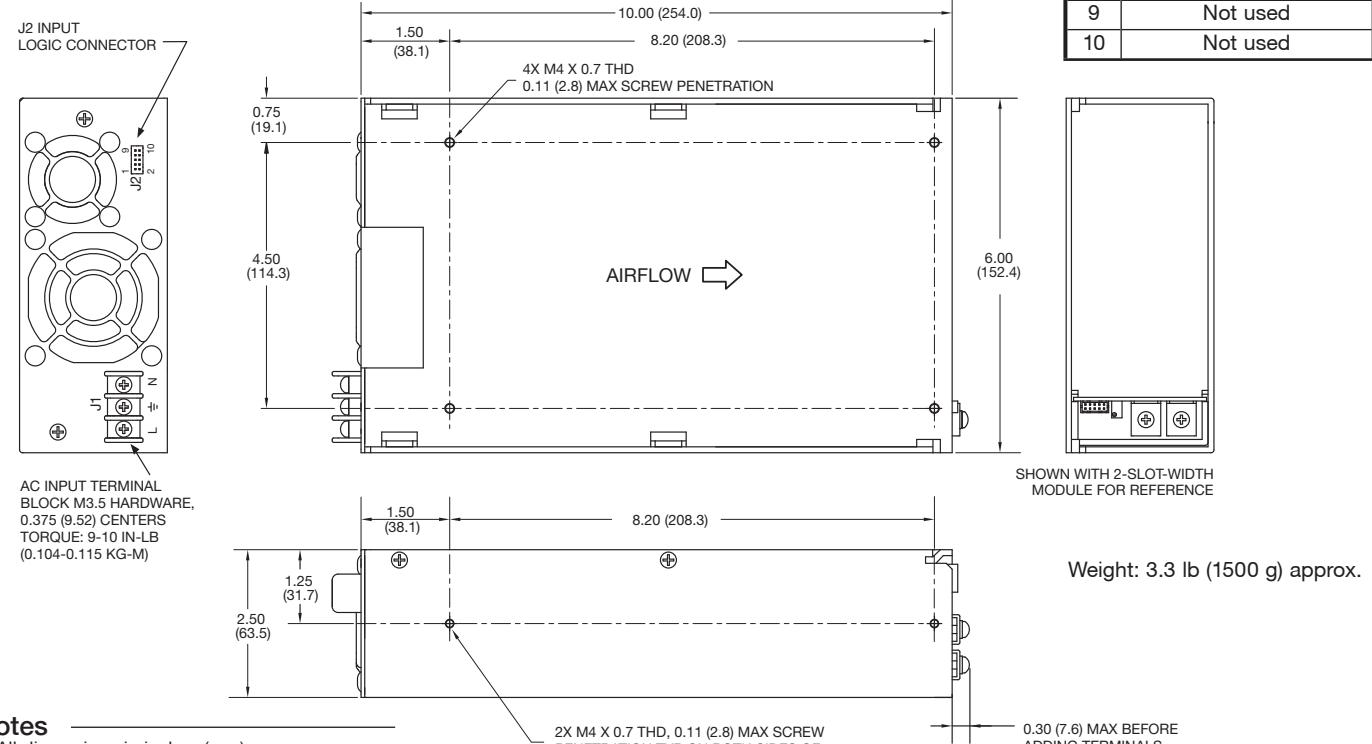


Notes

- All dimensions in inches (mm).
- Tolerance: x.xx = ±0.02 (±0.50), x.xxx = ±0.01 (±0.25)
- Mating plug: JST p/n PHDR-10VS.
- Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.
- High line only (180-264 VAC).

Mechanical Details

1000 (1200)⁽⁴⁾ Watt X10 & XM10 Chassis

Weight: 4 lb (1800 g) approx.

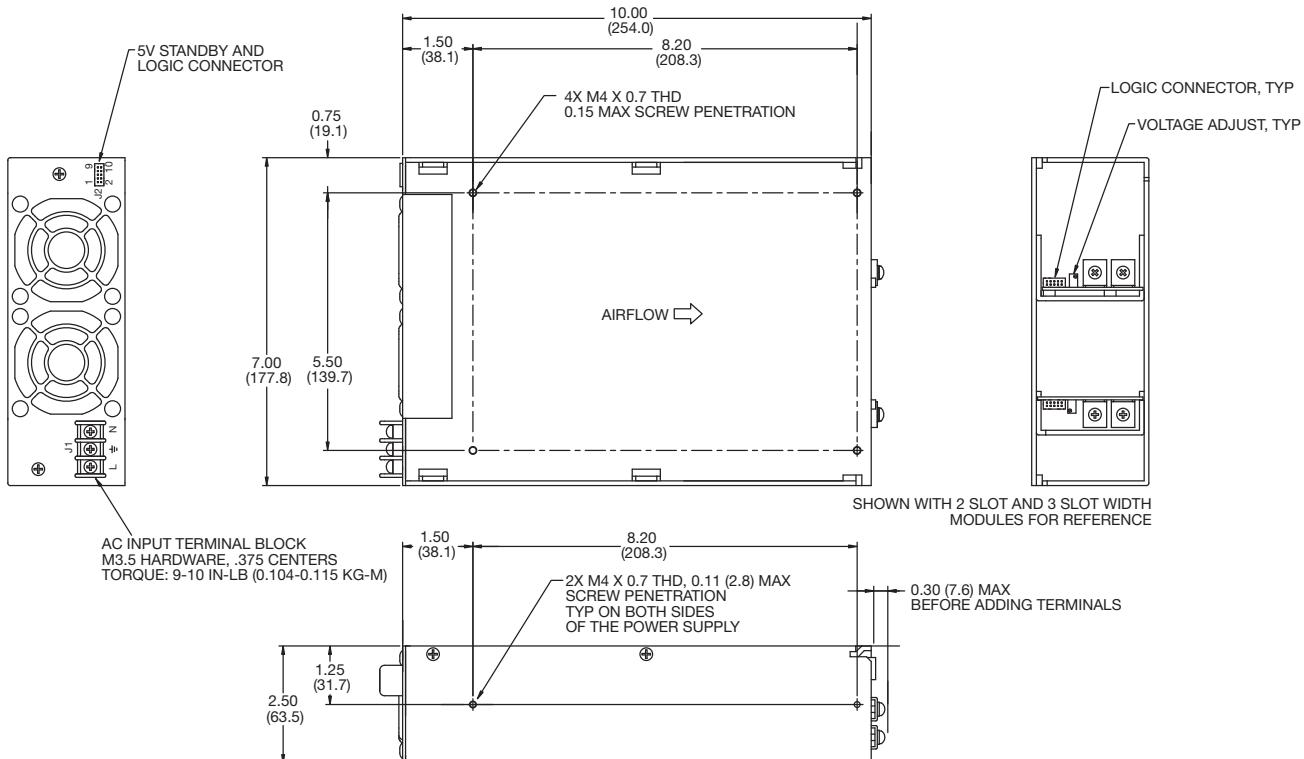

| J2 Input Logic Connector Pinouts | |
|----------------------------------|------------------------|
| Pin | Function |
| 1 | Global Inhibit Return |
| 2 | Global Inhibit |
| 3 | Global DC OK Emitter |
| 4 | Global DC OK Collector |
| 5 | Global AC OK Emitter |
| 6 | Global AC OK Collector |
| 7 | 5V Standby |
| 8 | 5V Standby Return |
| 9 | Manufacturer Use Only |
| 10 | Manufacturer Use Only |


Notes

1. All dimensions in inches (mm). Tolerance: x.xx = ±0.02 (±0.50), x.xxx = ±0.01 (±0.25)
2. Mating plug: JST p/n PHDR-10VS.
3. Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.
4. High line only (180-264 VAC).

Mechanical Details


800 (1200)⁽⁴⁾ Watt X4DD & XM4DD Chassis, 1000 (1400)⁽⁴⁾ Watt X5DD & XM5DD Chassis,
1400 (1800)⁽⁴⁾ Watt X7DD & XM7DD Chassis

Weight: 5.5 lb (2500 g) approx.

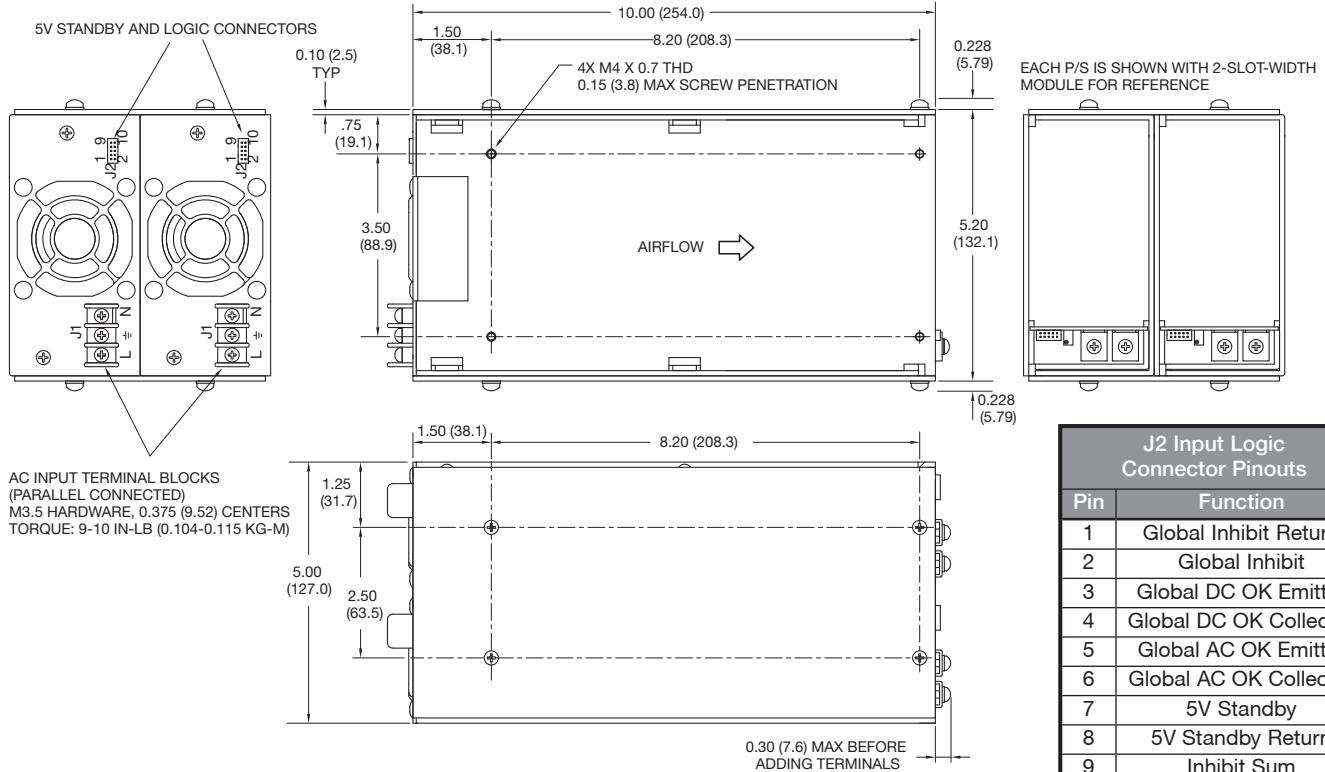

1800 (2200)⁽⁴⁾ Watt X9DD & XM9DD Chassis

| J2 Input Logic Connector Pinouts | |
|----------------------------------|------------------------|
| Pin | Function |
| 1 | Global Inhibit Return |
| 2 | Global Inhibit |
| 3 | Global DC OK Emitter |
| 4 | Global DC OK Collector |
| 5 | Global AC OK Emitter |
| 6 | Global AC OK Collector |
| 7 | 5V Standby |
| 8 | 5V Standby Return |
| 9 | Inhibit Sum |
| 10 | VCC Return |

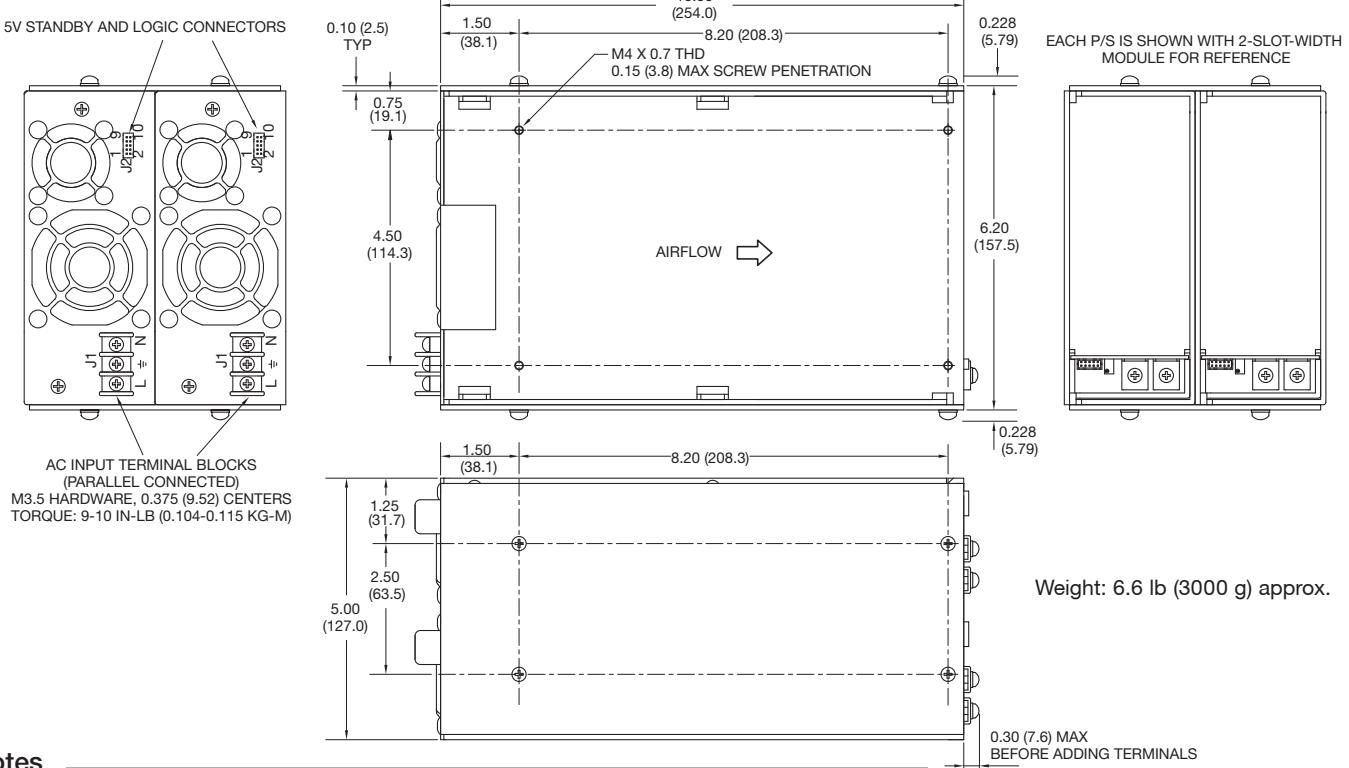

Weight: 6.6 lb (3000 g) approx.

Notes

1. All dimensions in inches (mm).

Tolerance: x.xx = ±0.02 (±0.50), x.xxx = ±0.01 (±0.25)

2. Mating plug: JST p/n PHDR-10VS.


3. Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.

4. High line only (180-264 VAC)

Mechanical Details

2000 (2400)⁽⁴⁾ Watt X10DD & XM10DD Chassis

Weight: 8.0 lb (3636 g) approx.

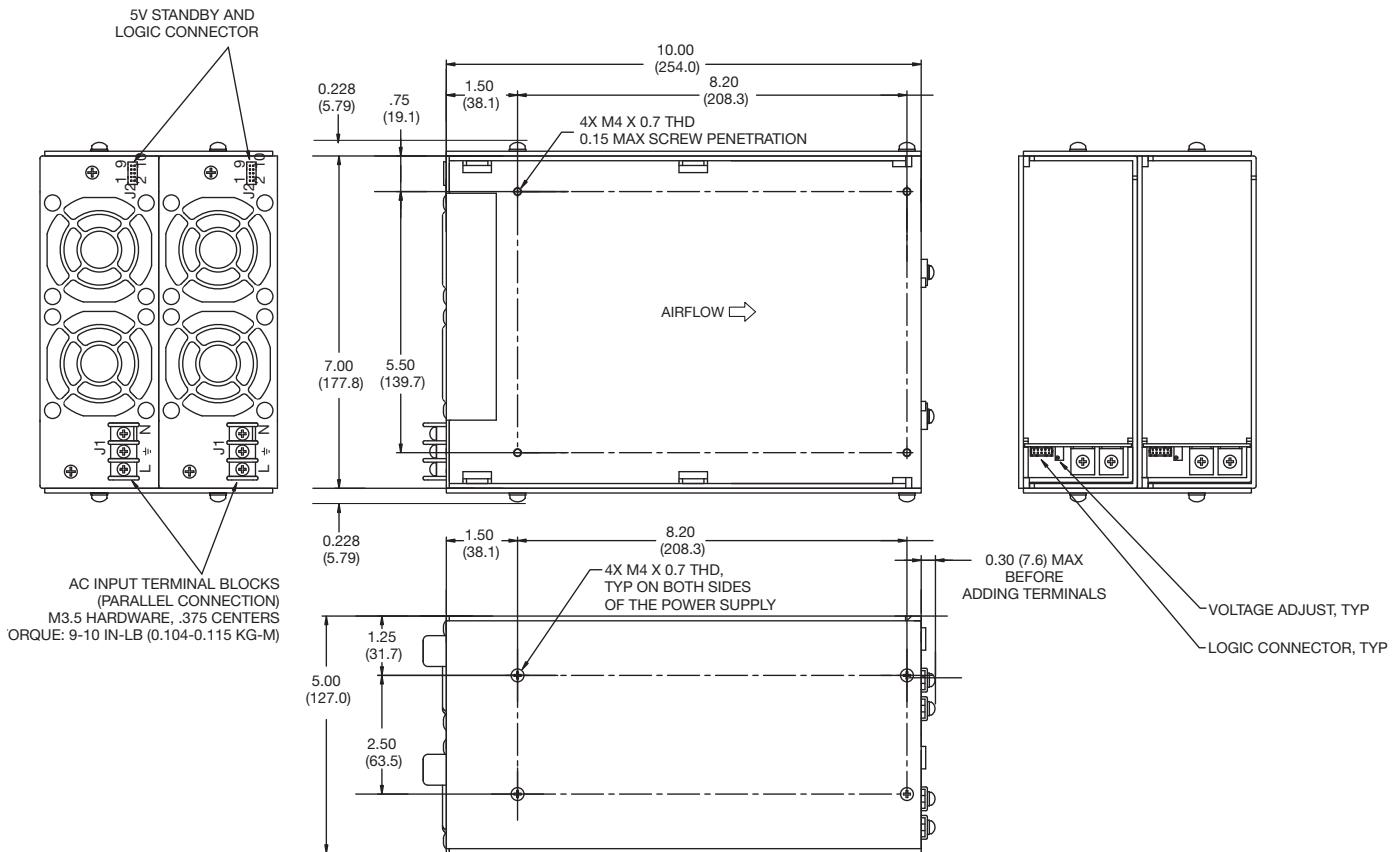


| J2 Input Logic Connector Pinouts | |
|----------------------------------|------------------------|
| Pin | Function |
| 1 | Global Inhibit Return |
| 2 | Global Inhibit |
| 3 | Global DC OK Emitter |
| 4 | Global DC OK Collector |
| 5 | Global AC OK Emitter |
| 6 | Global AC OK Collector |
| 7 | 5V Standby |
| 8 | 5V Standby Return |
| 9 | Inhibit Sum |
| 10 | VCC Return |

Notes

1. All dimensions in inches (mm). Tolerance: x.xx = ±0.02 (±0.50), x.xxx = ±0.01 (±0.25)
2. Mating plug: JST p/n PHDR-10VS.
3. Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.
4. High line only (180-264 VAC).

Chassis Mechanical Details

1500 (2500)⁽⁴⁾ Watt X15 & XM15 Chassis

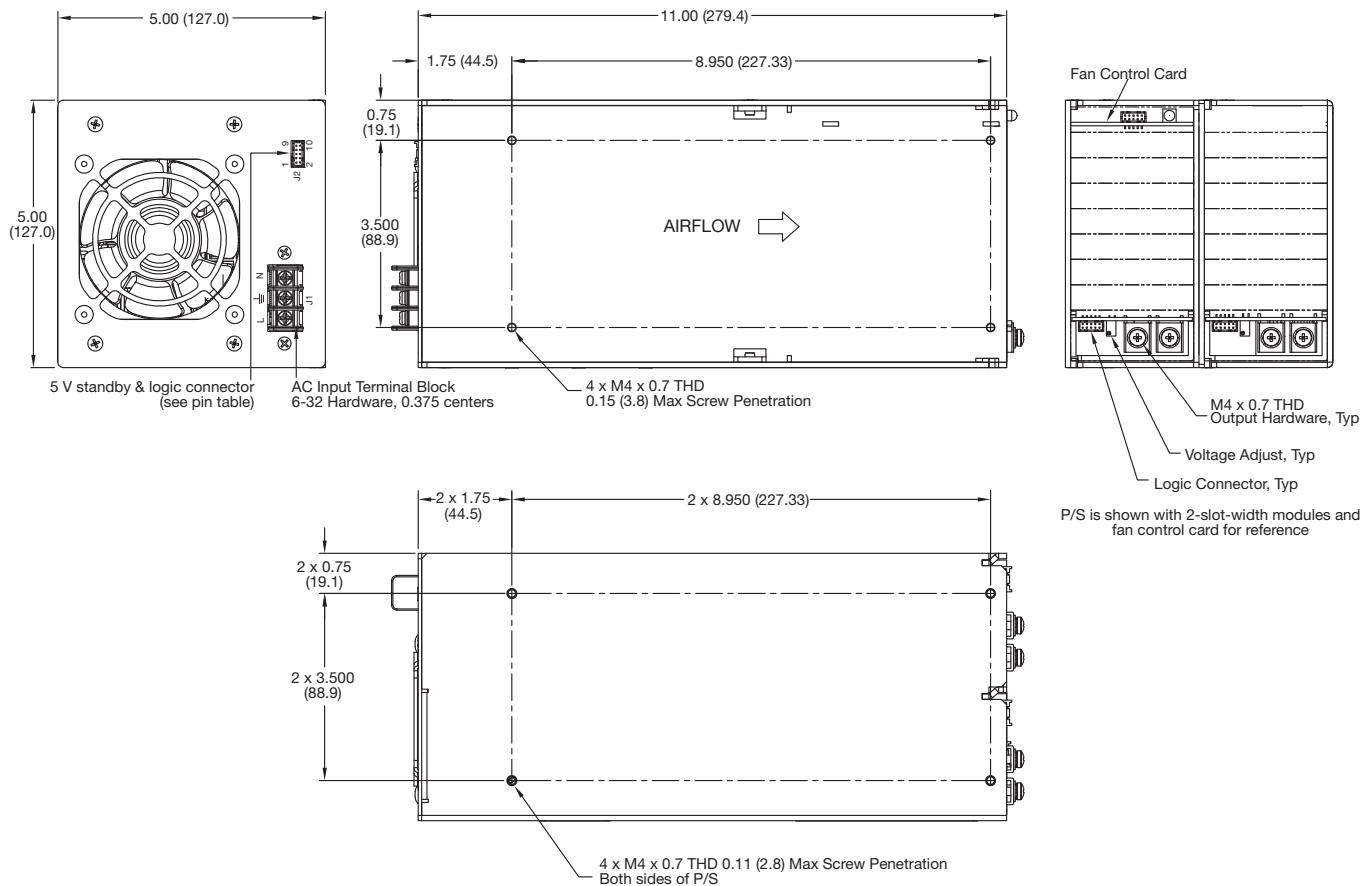


| J2 Input Logic Connector Pinouts | |
|----------------------------------|---------------------------------|
| Pin | Function |
| 1 | Global Inhibit Return |
| 2 | Global Inhibit |
| 3 | Global DC OK Emitter |
| 4 | Global DC OK Collector |
| 5 | Global AC OK Emitter |
| 6 | Global AC OK Collector |
| 7 | 5V Standby |
| 8 | 5V Standby Return |
| 9 | Inhibit Sum (Internal Use Only) |
| 10 | VCC Return (Internal Use Only) |

Notes


- All dimensions in inches (mm). Tolerance X.XX = ±0.02 (0.05), X.XXX = ±0.01 (0.25)
- Mating plug: JST p/n PHDR-10VS.
- Contact: 26-22 AWG JST p/n SPHD-001T-P0.5.
- High line only (180-264 VAC).
- Weight: 8.0 lbs (3636 g) approx.

Output Characteristics - Hold Up Time


Hold Up Time X4

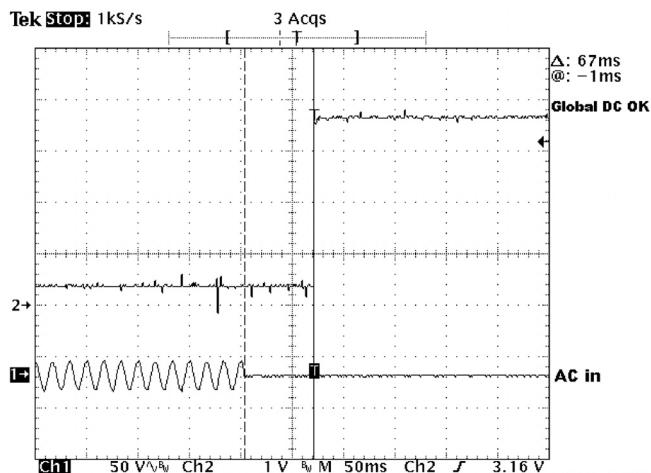


Hold Up Time X5

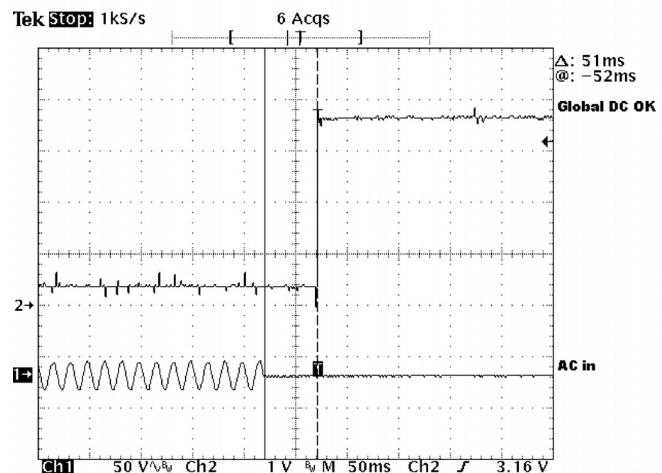


Hold Up Time X7

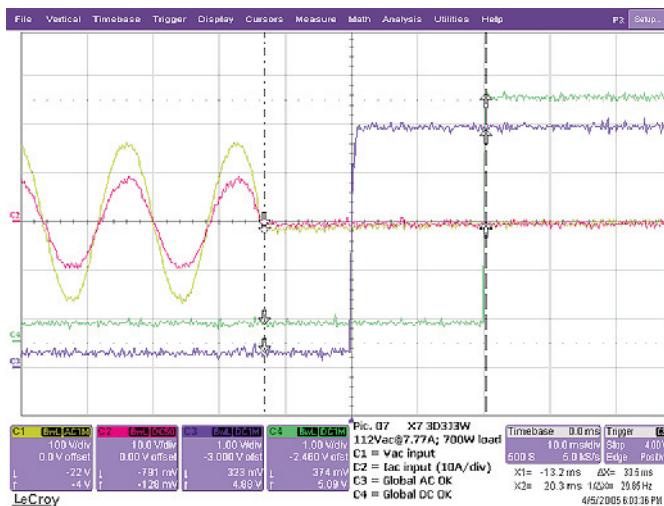


Hold Up Time X7 with 900 W load

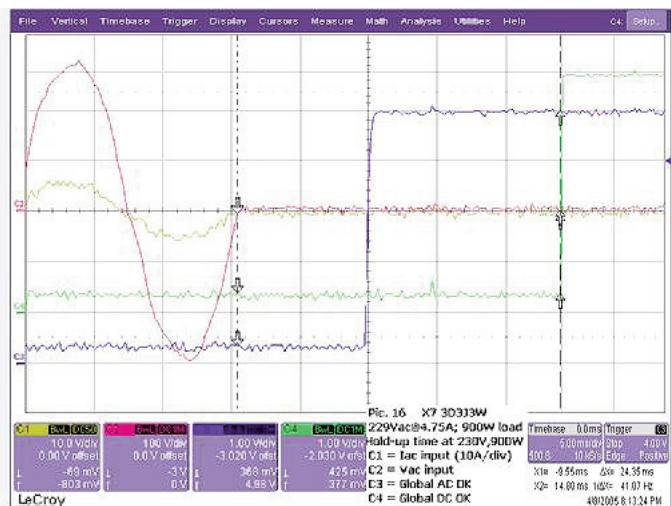

Hold Up Time X9

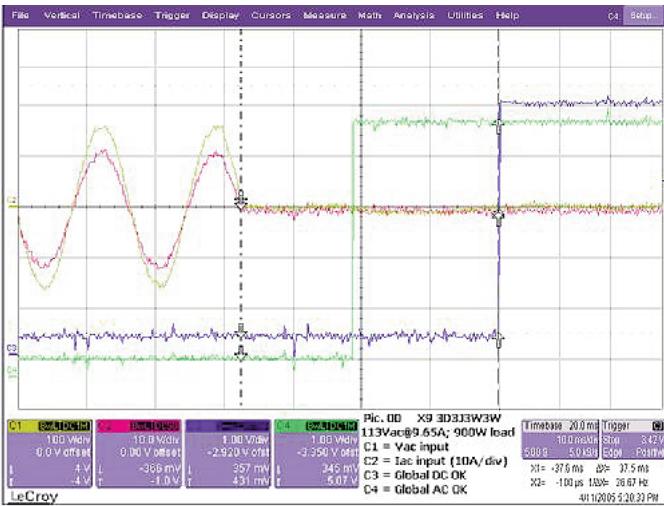


Hold Up Time X9 with 1100 W load

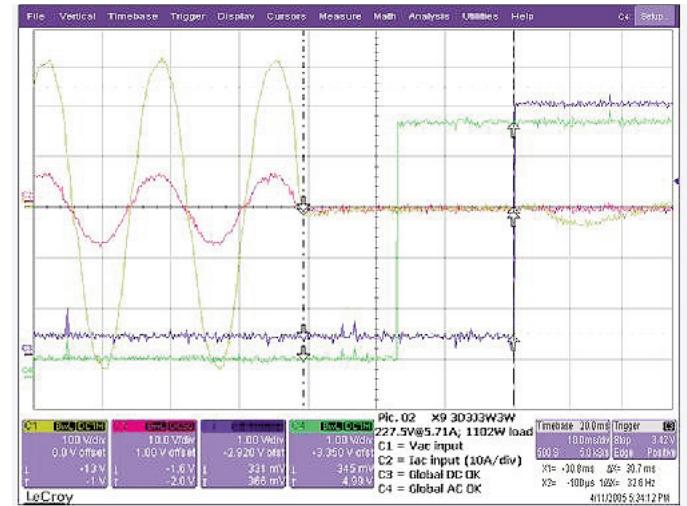


Output Characteristics - Hold Up Time - Continued


Hold Up Time X10

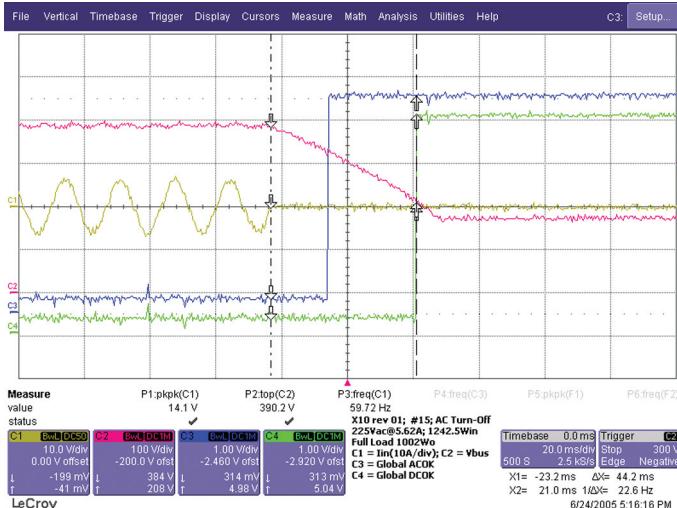


Hold Up Time X10 with 1200 W load

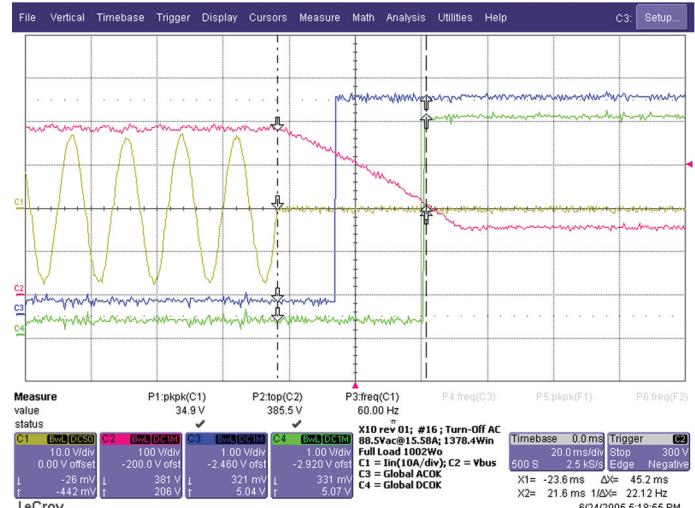


Hold Up Time X15

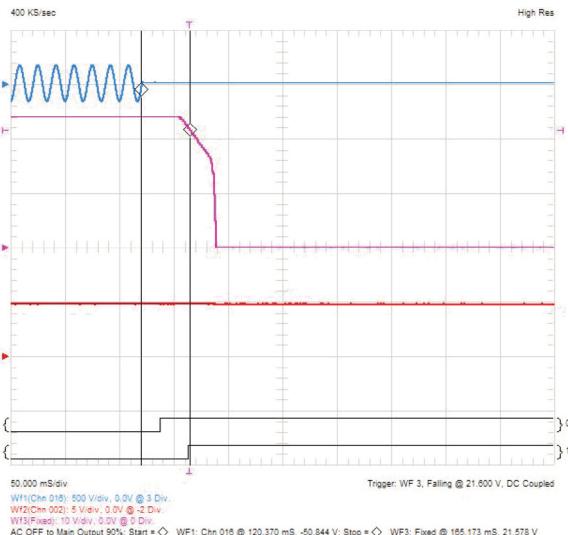


Hold Up Time X15 with 2500 W load

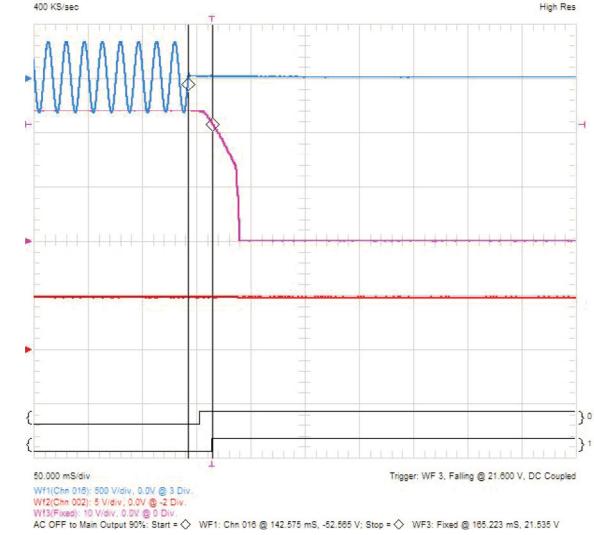

Output Power Derating

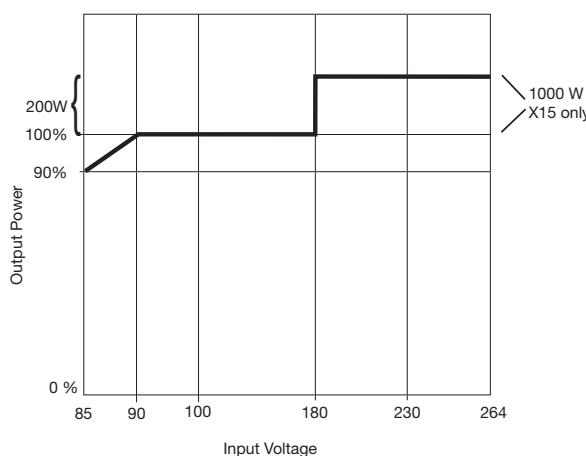


Load derating curve for X4, X5, X7, X9, X10, X15

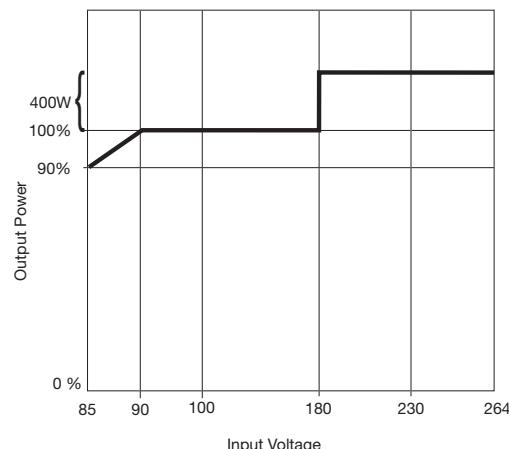


Load derating curve for X4DD, X5DD, X7DD, X9DD and X10DD

Efficiency


X7 Models

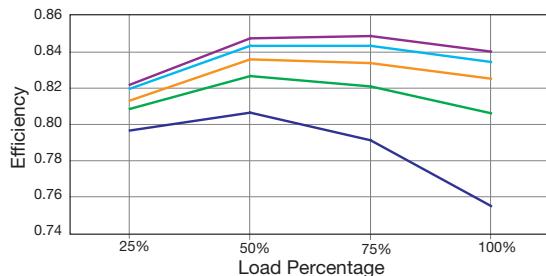


X9 Models

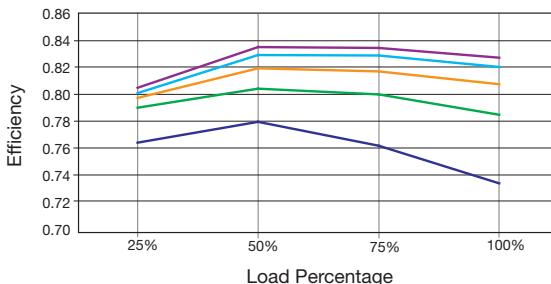


X10 Models

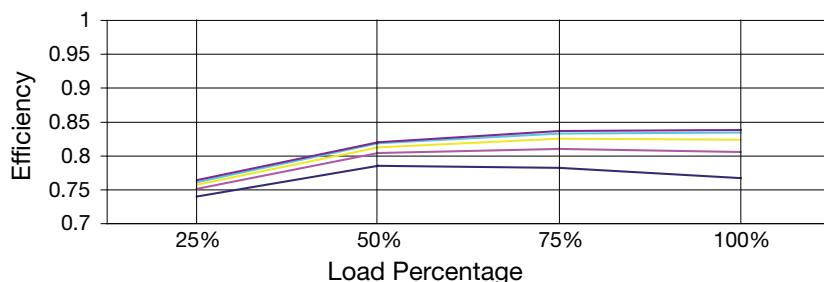


X10DD Models

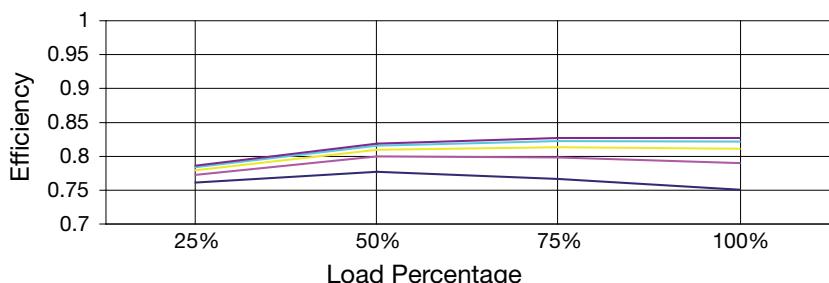

X15 Models

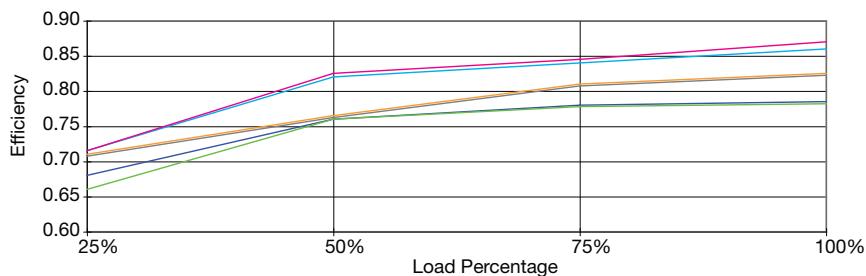


Output Characteristics - Transient Response

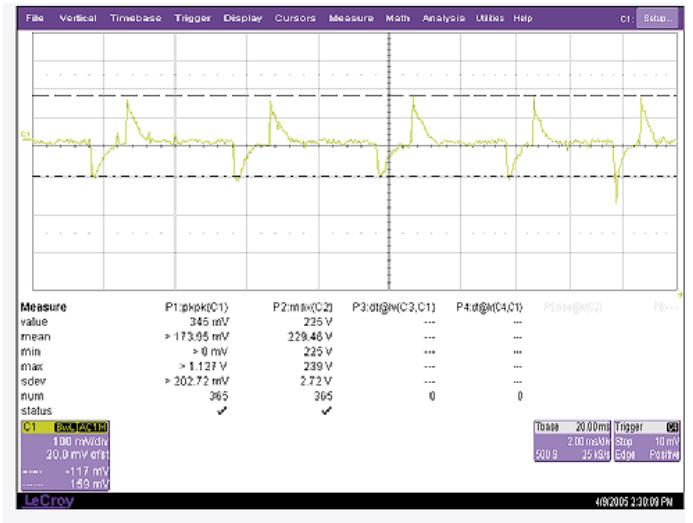


5 V/40 A Module, 50 to 100% load Change

5 V/60 A Module, 50 to 100% load Change

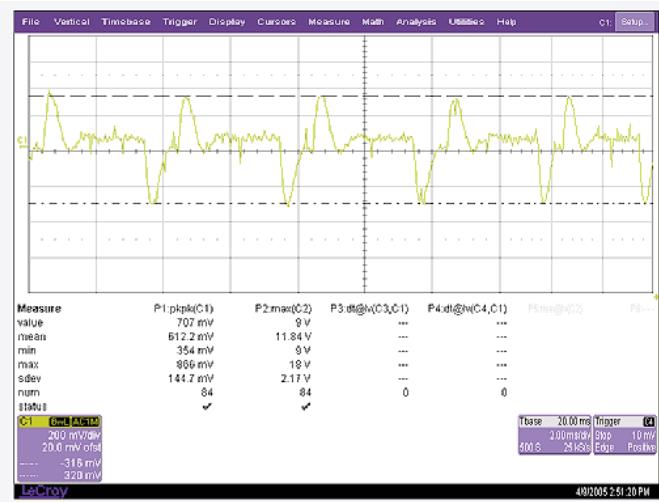

48 V/5.2 A Module, 50 to 100% load Change

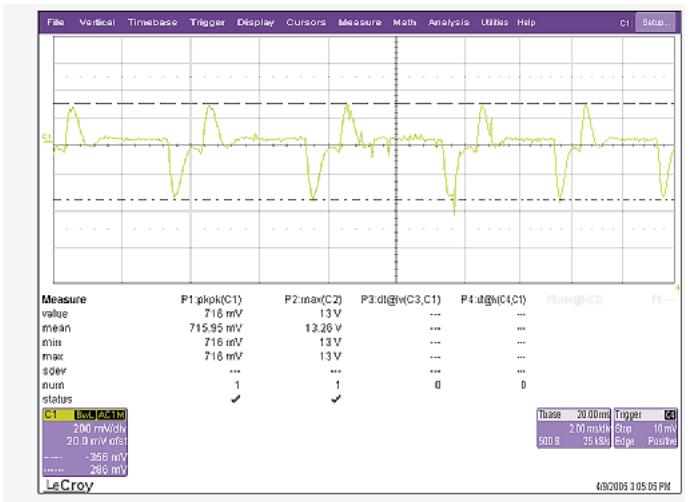


48 V/8.5 A Module, 50 to 100% load Change

Output Characteristics - Ripple & Noise

7-Apr-05
10:22:22

2 μ s
100 mV
67 mV

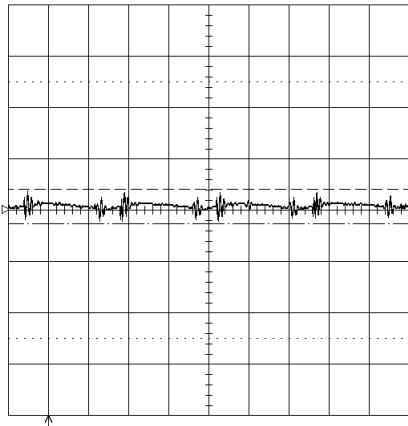

2 μ s BWL
1 2 V DC $\frac{1}{10}$
2 10 mV AC $\frac{1}{10}$
3 10 mV DC $\frac{1}{10}$
4 10 mV DC

2 DC 2mV

CHANNEL 2


Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div Offset
NORMAL
ECL TTL

Probe sensed
(x10)

7-Apr-05
10:28:28

2 μ s
100 mV
116 mV

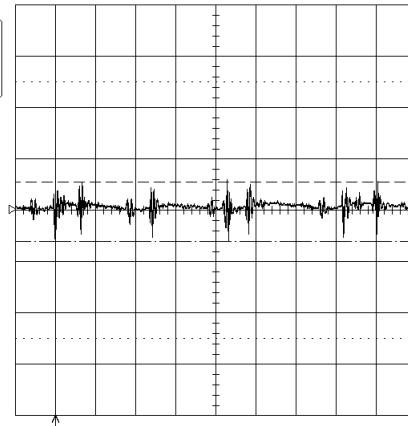

2 μ s
1 2 V DC $\frac{1}{10}$
2 10 mV AC $\frac{1}{10}$
3 10 mV DC $\frac{1}{10}$
4 10 mV DC

2 DC 2mV

CHANNEL 2

Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div Offset
NORMAL
ECL TTL


Probe sensed
(x10)

5 V Output Ripple and Noise at 30 MHz

5 V Output Ripple and Noise at 150 MHz

7-Apr-05
10:25:45

2 μ s
100 mV
33 mV

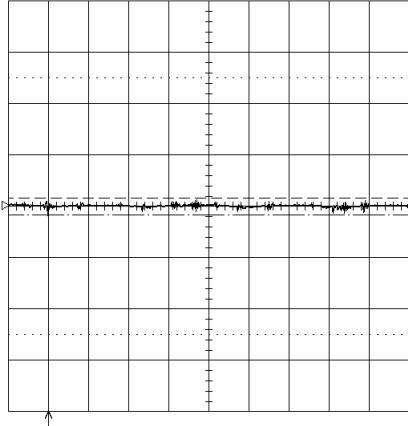

2 μ s BWL
1 2 V DC $\frac{1}{10}$
2 10 mV AC $\frac{1}{10}$
3 10 mV DC $\frac{1}{10}$
4 10 mV DC

2 DC 2mV

CHANNEL 2


Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div Offset
NORMAL
ECL TTL

Probe sensed
(x10)

7-Apr-05
10:23:53

2 μ s
100 mV
73 mV

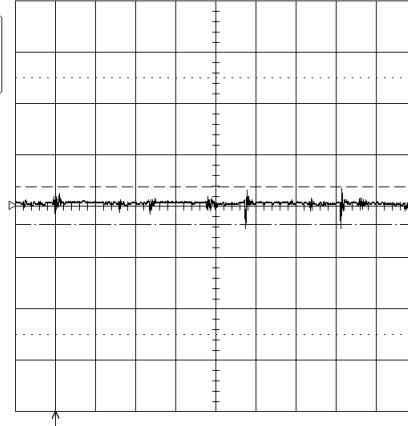

2 μ s
1 2 V DC $\frac{1}{10}$
2 10 mV AC $\frac{1}{10}$
3 10 mV DC $\frac{1}{10}$
4 10 mV DC

2 DC 2mV

CHANNEL 2

Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω


V/div Offset
NORMAL
ECL TTL

Probe sensed
(x10)


48 V Output Ripple and Noise at 30 MHz

48 V Output Ripple and Noise at 150 MHz


Harmonics

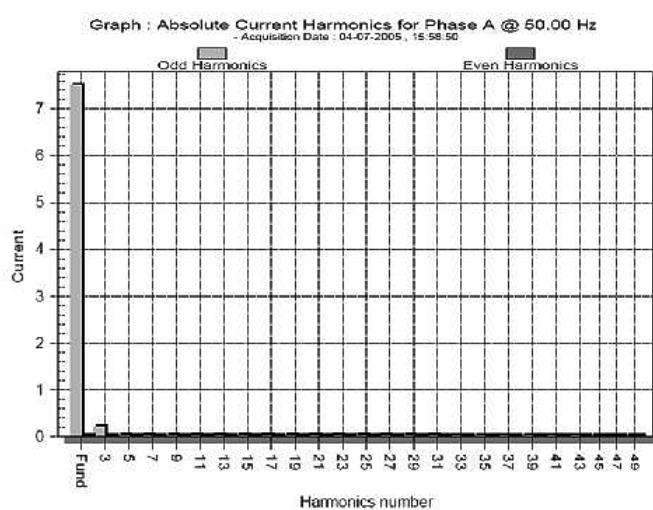


Harmonics 1: X7 50 Hz 115 V

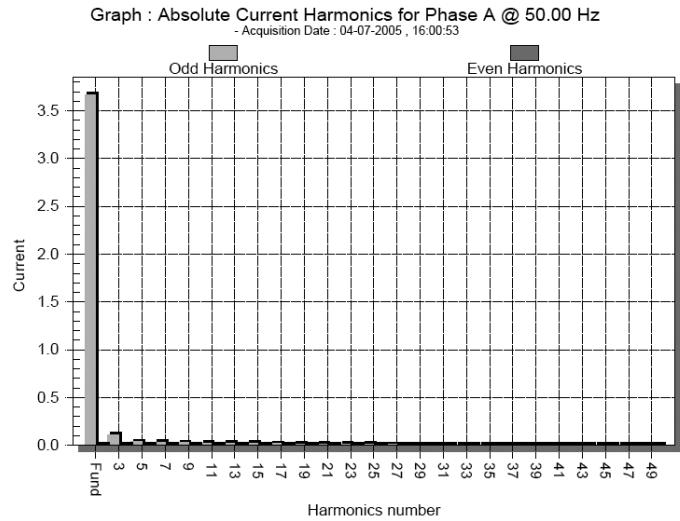

Harmonics 2: X7 50 Hz 230 V

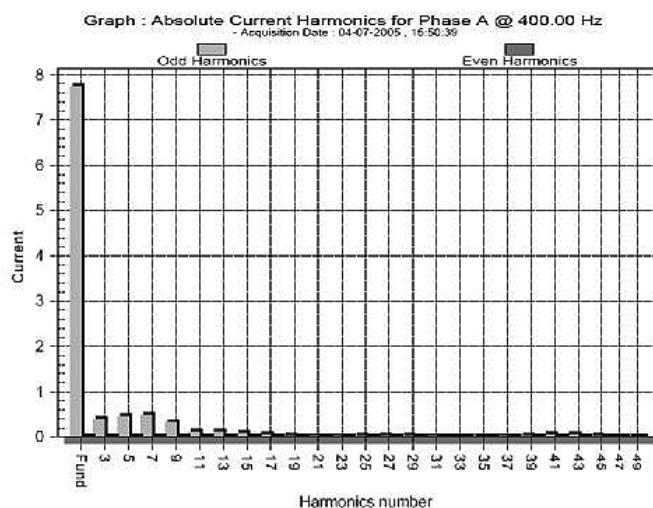


Harmonics 3: X7 400 Hz 115 V

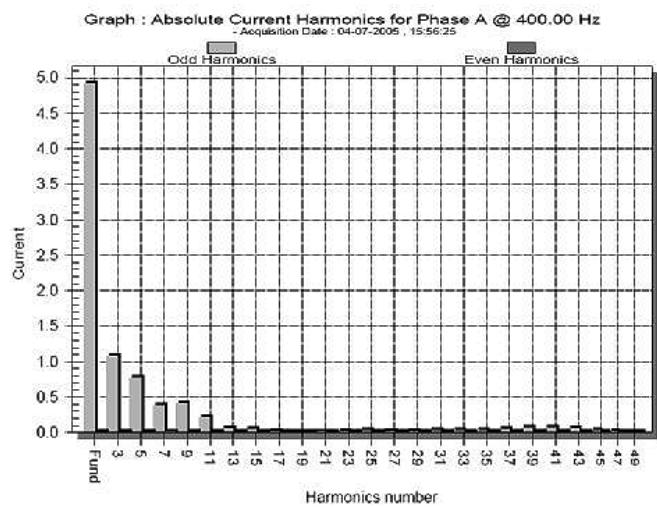


Harmonics 4: X7 400 Hz 230 V

Harmonics

Graph : Absolute Current Harmonics for Phase A @ 50.00 Hz
- Acquisition Date : 04-11-2005 , 09:44:33

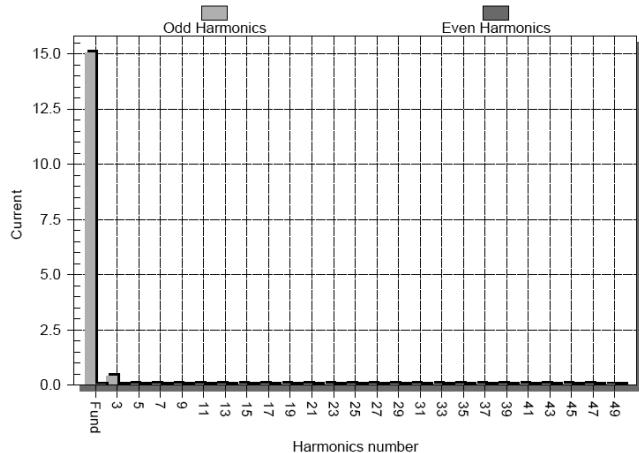


Graph : Absolute Current Harmonics for Phase A @ 50.00 Hz
- Acquisition Date : 04-11-2005 , 09:45:57

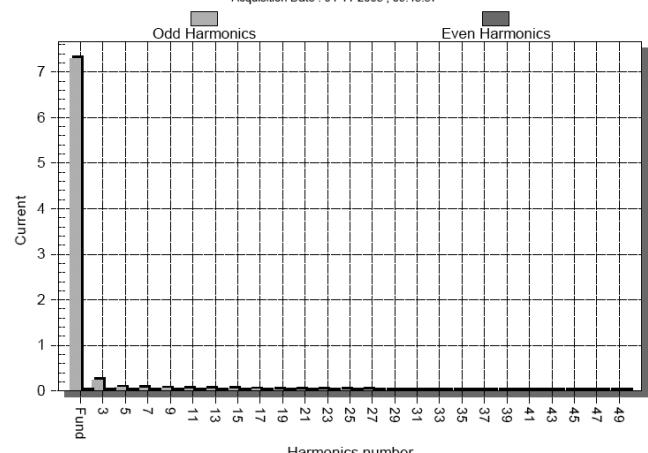


Harmonics 5: X7 DD 50 Hz 115 V

Harmonics 6: X7 DD 50 Hz 230 V

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-11-2005 , 09:48:31

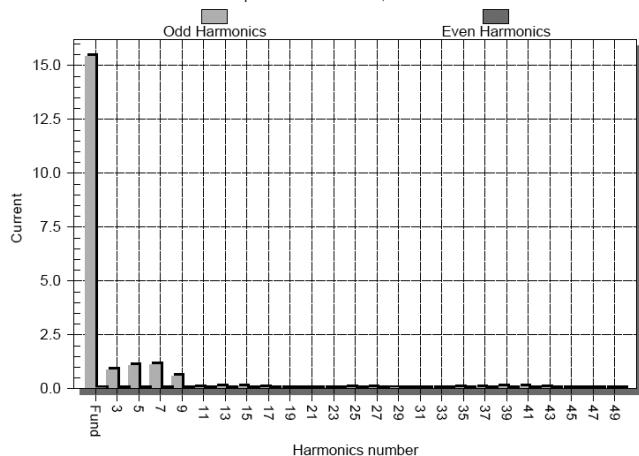

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-11-2005 , 09:47:01

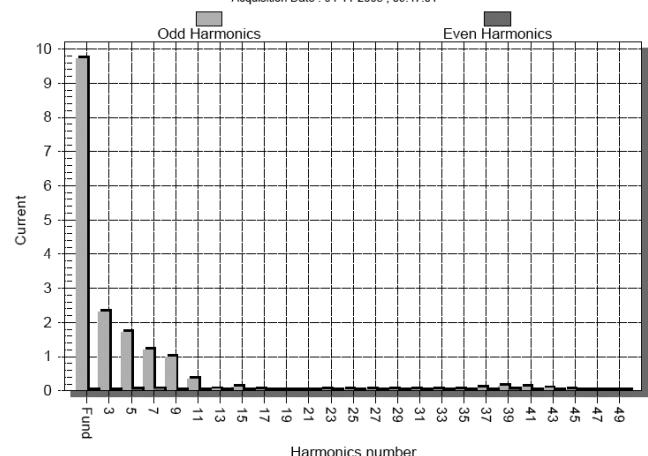


Harmonics 7: X7 DD 400 Hz 115 V


Harmonics 8: X7 DD 400 Hz 230 V

Harmonics

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-08-2005 , 16:03:05

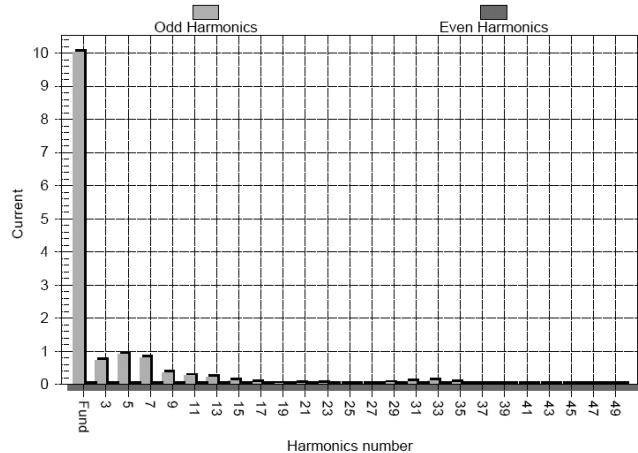


Graph : Absolute Current Harmonics for Phase A @ 50.00 Hz

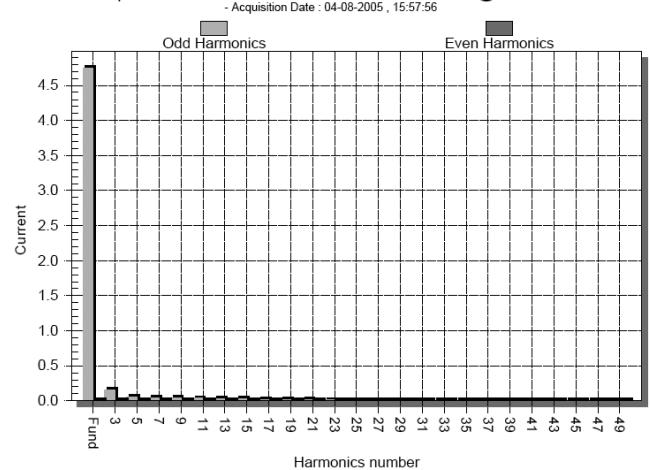


Harmonics 9: X9 50 Hz 115 V

Harmonics 10: X9 50 Hz 230 V

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-08-2005 , 16:03:05

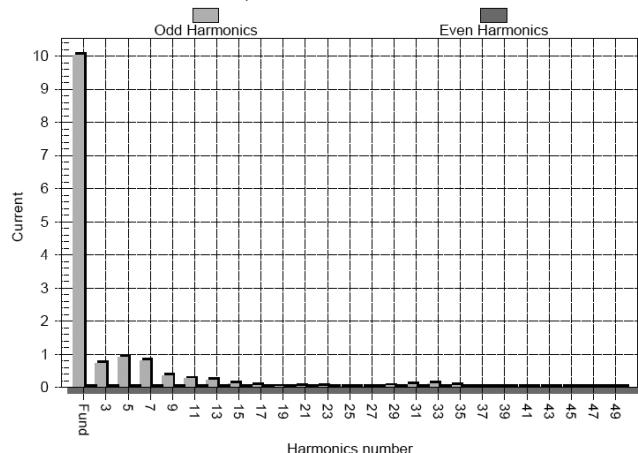

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-08-2005 , 16:06:26

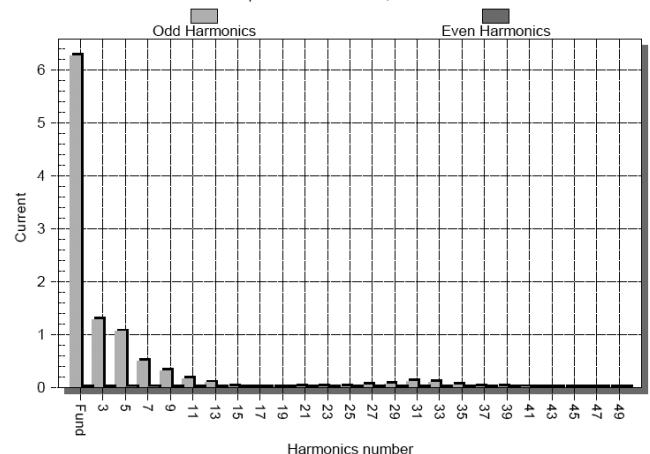


Harmonics 11: X9 400 Hz 115 V


Harmonics 12: X9 400 Hz 230 V

Harmonics

Graph : Absolute Current Harmonics for Phase A @ 50.00 Hz
- Acquisition Date : 04-11-2005 , 09:06:58

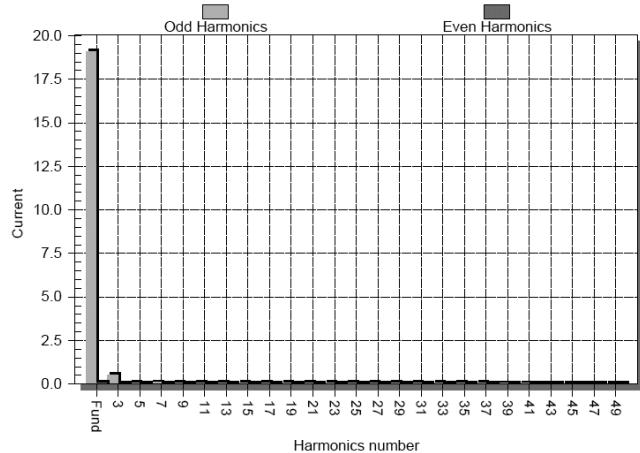


Graph : Absolute Current Harmonics for Phase A @ 50.00 Hz
- Acquisition Date : 04-11-2005 , 09:08:58

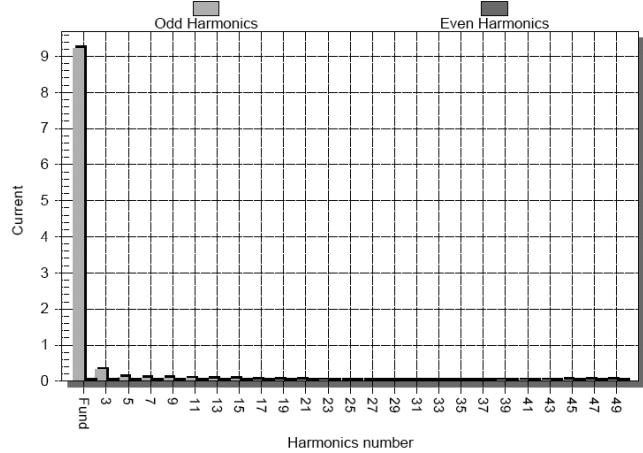


Harmonics 13: X9 DD 50 Hz 115 V

Harmonics 14: X9 DD 50 Hz 230 V

Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-11-2005 , 09:14:23

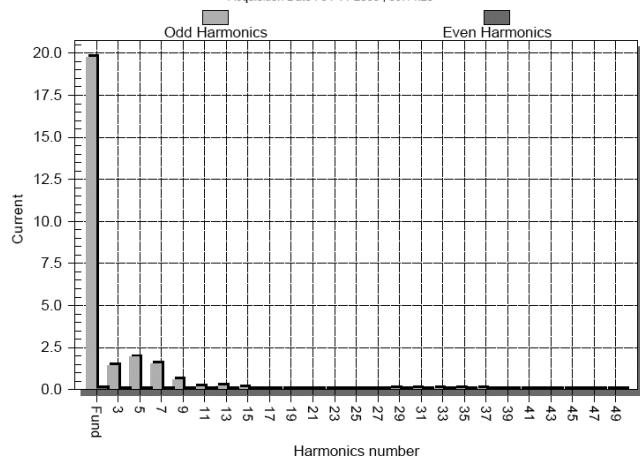



Graph : Absolute Current Harmonics for Phase A @ 400.00 Hz
- Acquisition Date : 04-11-2005 , 09:11:46

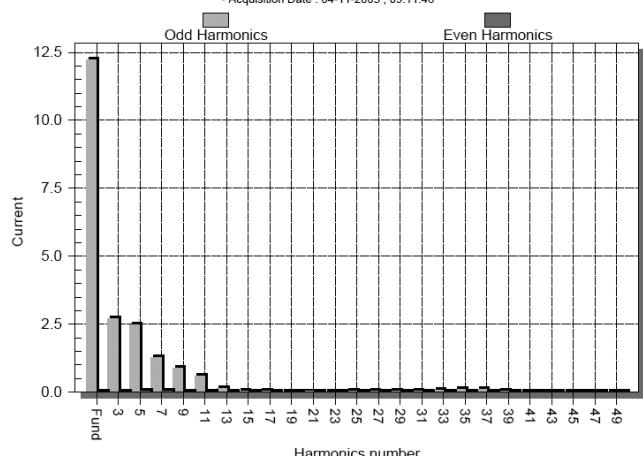

Harmonics 15: X9 DD 400 Hz 115 V



Harmonics 16: X9 DD 400 Hz 230 V

Harmonics

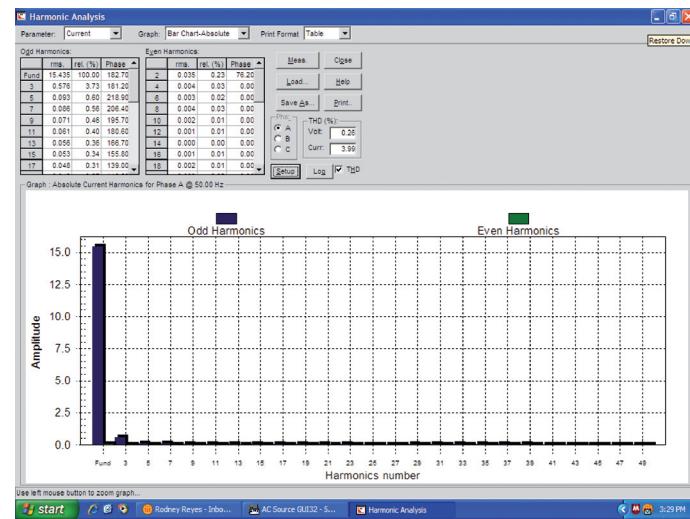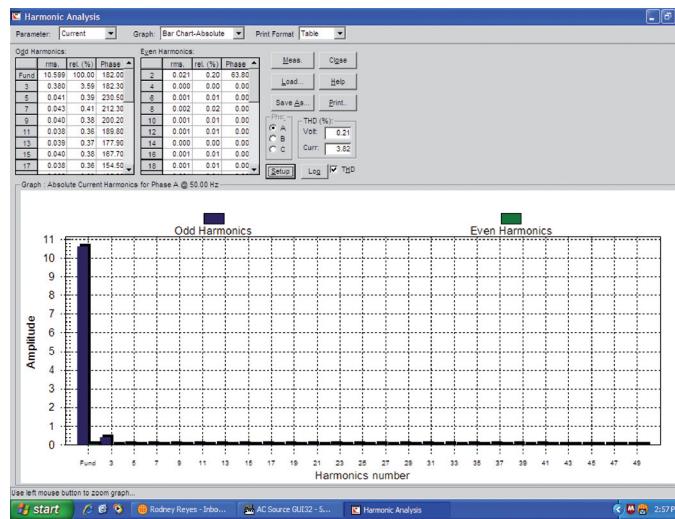

Harmonics 17: X10 50 Hz 115 V


Harmonics 18: X10 50 Hz 230 V

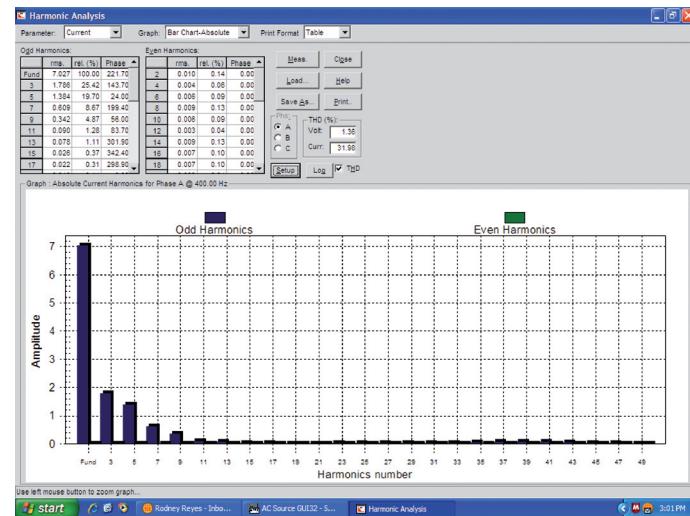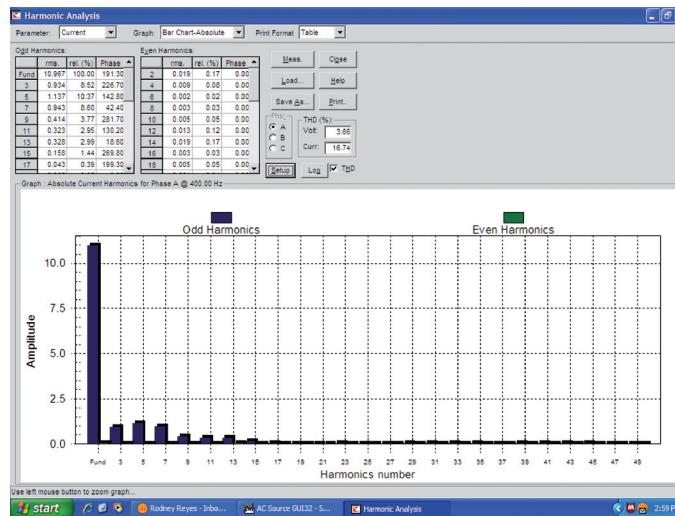


Harmonics 19: X10 400 Hz 115 V

Harmonics 20: X10 400 Hz 230 V


Harmonics

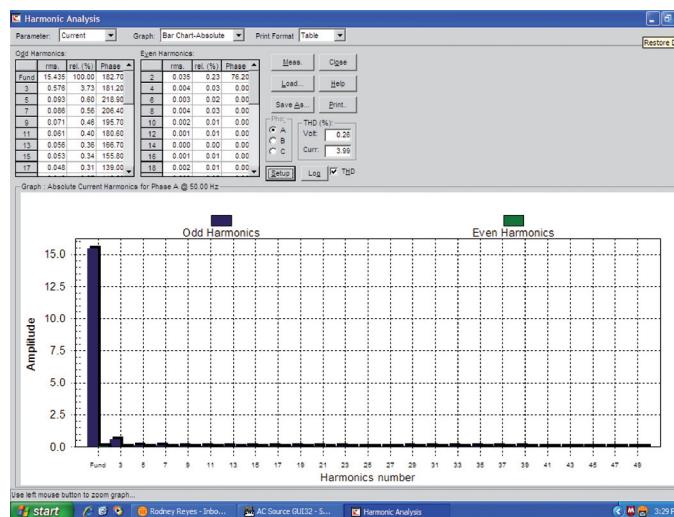


Harmonics 21: X10 DD 50 Hz 115 V

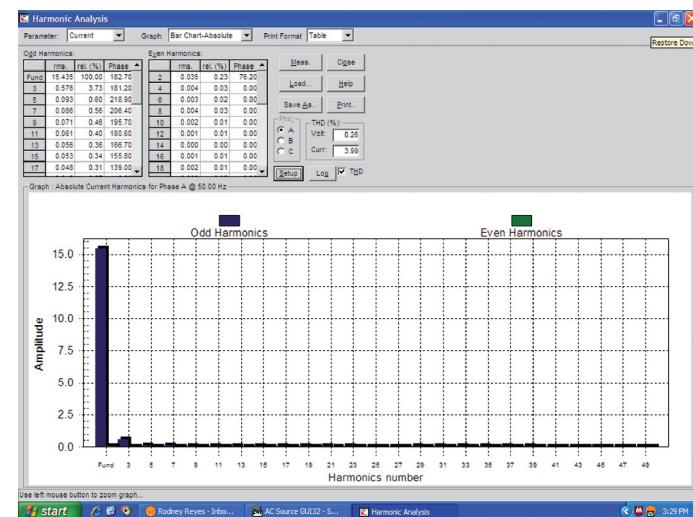

Harmonics 22: X10 DD 50 Hz 230 V

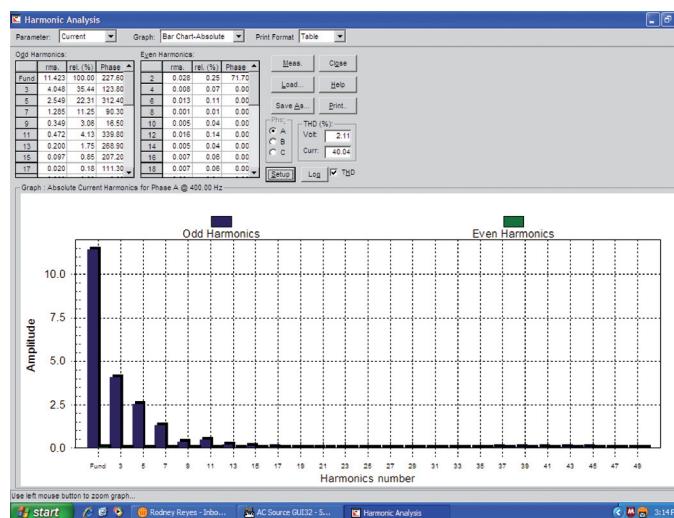

Harmonics 23: X10 DD 400 Hz 115 V

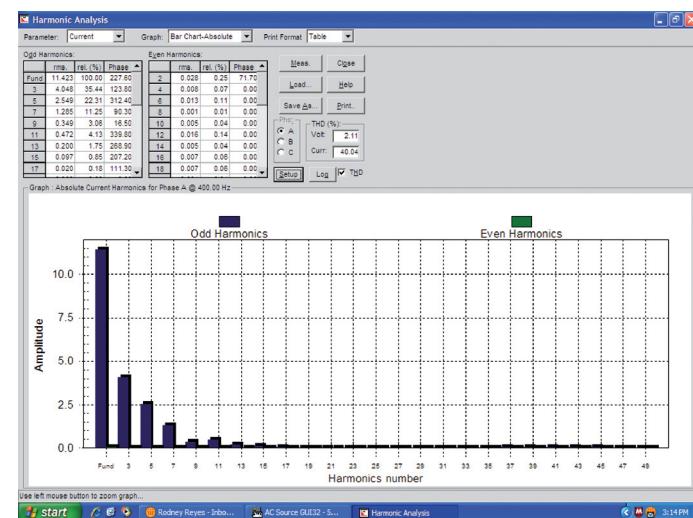


Harmonics 24: X10 DD 400 Hz 230 V

Harmonics

[Harmonics and Class D limit line](#)

[European Limits](#)

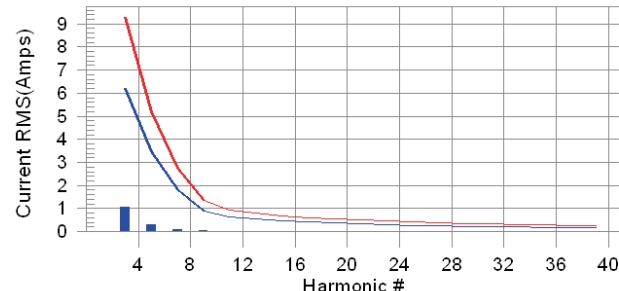


Test result: Pass Worst harmonic was #3 with 11.50% of the limit.

Harmonics 25: X15 120 V 50 Hz

[Harmonics and Class D limit line](#)

[European Limits](#)

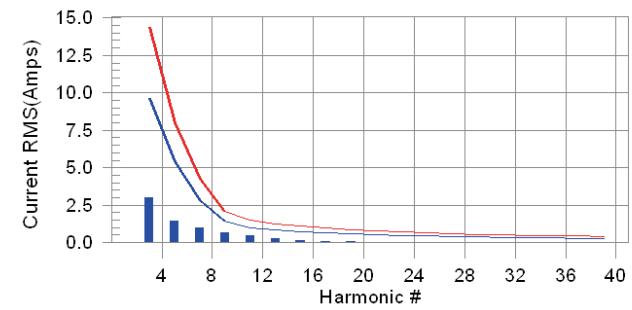


Test result: Pass Worst harmonic was #11 with 32.64% of the limit.

Harmonics 26: X15 230 V 50 Hz

[Harmonics and Class A limit line](#)

[European Limits](#)

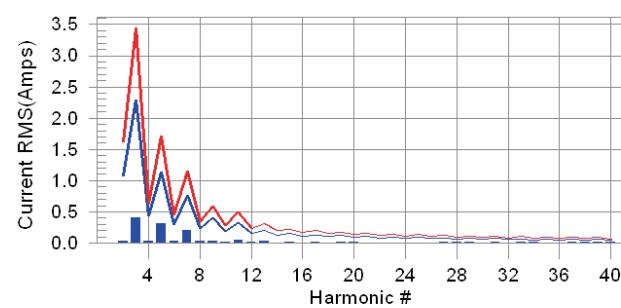


Test result: Pass Worst harmonic was #39 with 23.81% of the limit.

MHarmonics 27: X15 120 V 60 Hz

[Harmonics and Class A limit line](#)

[European Limits](#)

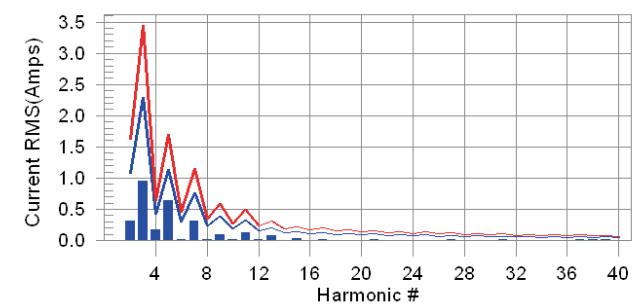

Test result: Pass Worst harmonic was #5 with 37.86% of the limit.

Harmonics 28: XM15 230 V 50 Hz