

Matter Over Thread + Zigbee Dual Tech RGB CCT LED Controller




www.TigerPowerSupplies.com

Operation



Important: Read All Instructions Prior to Installation

Function introduction

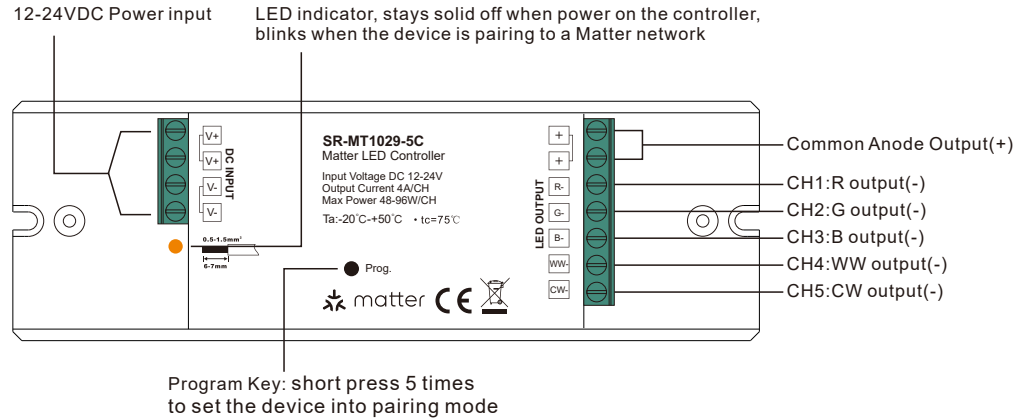

Product Data

Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)	Ambient Temperature	Max. Casing Temperature
12-24VDC	4A/CH	48-96W/CH	Constant voltage	145x46.5x16mm	-20°C ~ +50°C	75.

Product Features

- Matter over thread + Zigbee dual tech, Matter certified light devices
- Communication via an IPv6 Thread Network
- App control + touchlink remote control + green power kinetic switch control
- App control through Matter (e.g. Apple Home, Amazon Alexa, Google Home)
- Controls RGB + tunable white LED lights
- Fully compatible with universal Matter ecosystems from different manufacturers
- Thread Border Router is required (e.g. Apple HomePod mini or Google NestHub)
- Easy commissioning and pairing by scanning the QR code
- Remote control through Zigbee touchlink remotes or wall switches
- Kinetic switch control through Zigbee green power switches
- Can be voice controlled through Apple Siri, Google Assistant, Amazon Alexa
- Eliminates the shortcoming of Matter having few remote and wall switch devices
- Wireless firmware updates possible
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

www.TigerPowerSupplies.com



1. Do wiring according to connection diagram correctly.

2. This Matter thread device is a wireless receiver that communicates with a variety of Matter compatible systems. This receiver receives and is controlled by wireless radio signals from the compatible Matter system.

3. Add to a Matter border router and control through the Matter platform:

Note: an Apple HomePod mini is used as a Matter border router for adding and controlling the device. For other Matter border routers, please refer to their user manuals to learn how to add and control Matter devices.

Step 1: Prepare an iPhone (iOS 16.2 or later) or iPad (iPadOS 16.2 or later) with the latest version firmware, and prepare an Apple HomePod mini with the latest version firmware.

Step 2: Connect the iPhone or iPad to your home WLAN network. Run the Apple Home app and set up the HomePod mini as instructed by Apple (as shown in **Figure 1** to **Figure 7**).

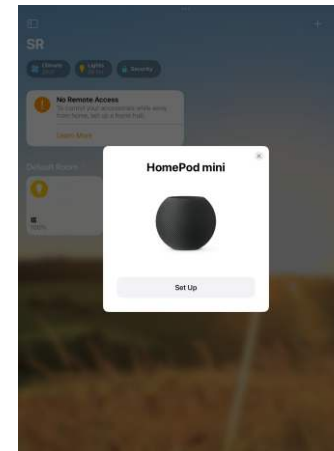


Figure 1

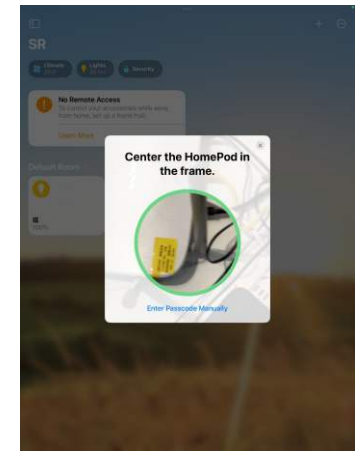


Figure 2

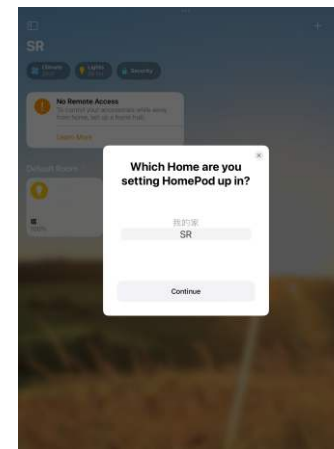


Figure 3

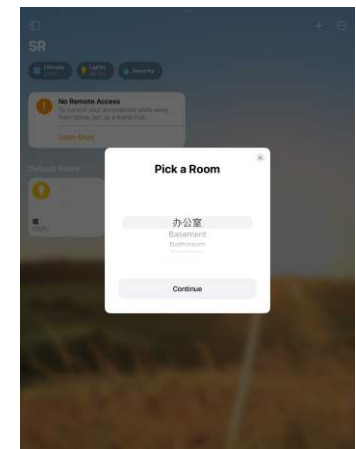


Figure 4

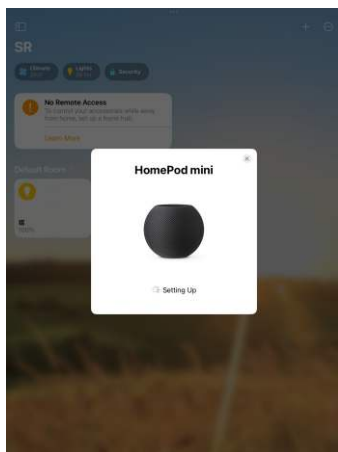


Figure 5

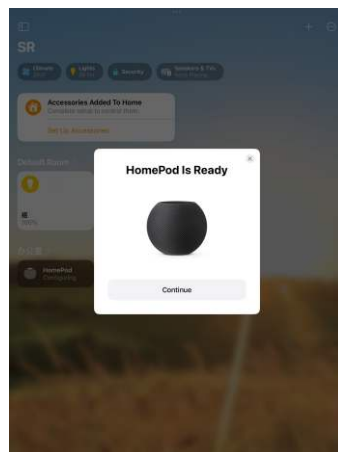


Figure 6

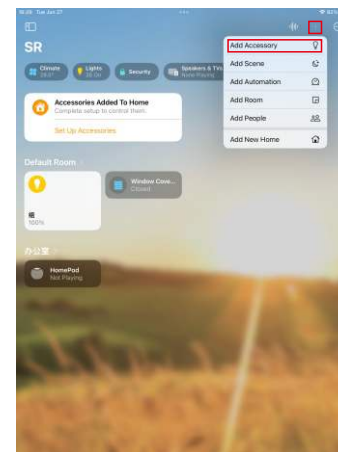


Figure 8

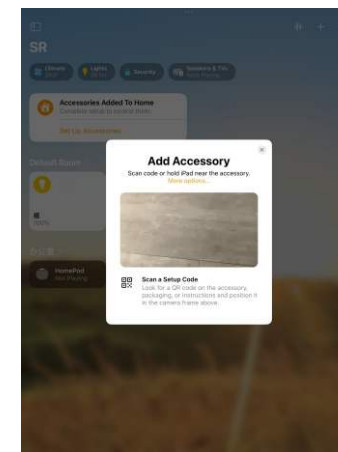


Figure 9

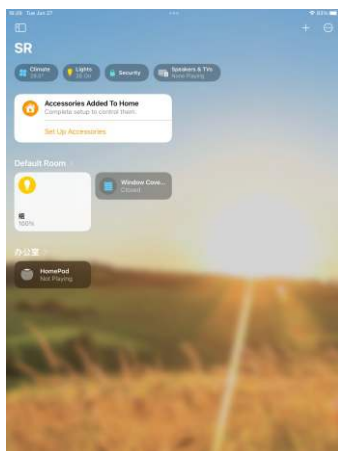


Figure 7

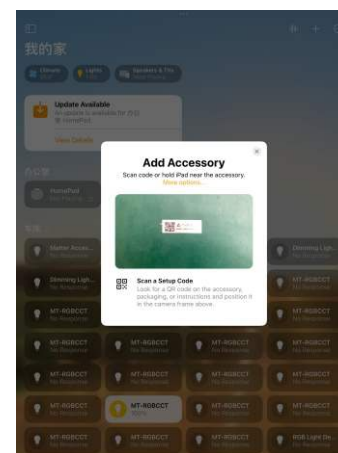


Figure 10

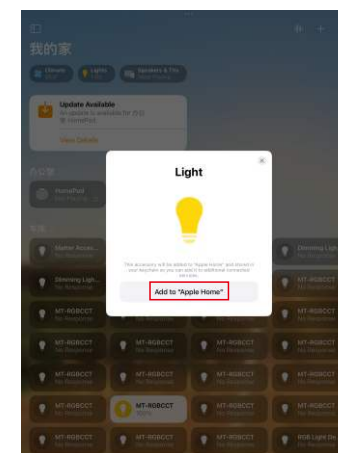


Figure 11

Step 3: Do wiring of the Matter LED controller according to the wiring diagram and power on it.

Step 4: Short press the Prog. button 5 times to set the LED controller into pairing mode.

Step 5: Add the Matter LED controller to the Apple Home app by scanning the QR code sticker on the LED controller as shown in **Figure 8** to **Figure 15**.

Note: before scanning the QR code sticker on the dimmer as shown in **Figure 10**, short press the Prog. button 5 times to set the LED controller into pairing mode so that it can be discovered by the Apple Home app. Otherwise it can not be discovered by the Apple Home App.

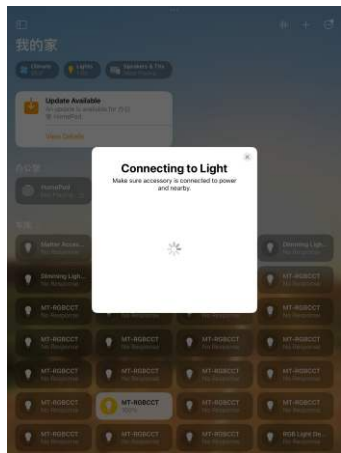


Figure 12

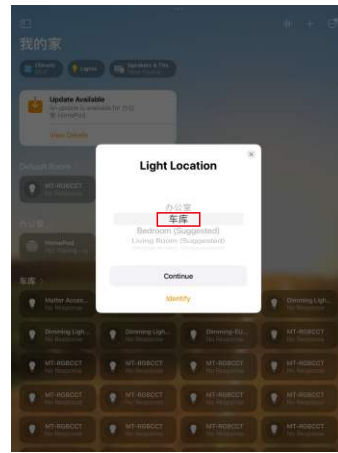


Figure 13



Figure 16

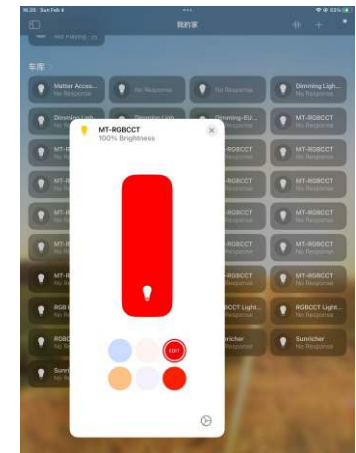


Figure 17

Step 6: once the LED controller is added to the border router successfully, tap on the device to control on/off, and press and hold device icon to enter into brightness and color control interface as shown in **Figure 16** to **Figure 17**.

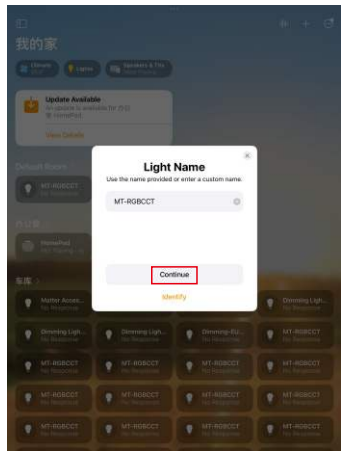


Figure 14



Figure 15

Note: when choose the room that you would like to add the LED controller to, please make sure to choose the same room that the HomePod mini is located as shown in **Figure 13**.

4. Restore factory settings

To restore the factory settings, short press the "Prog." button 5 times or switch the device on and off in the following sequence.

Stage	Duration	State
1	< 1s	ON
2	> 3s	OFF
3	5s - 15s	ON
4	> 3s	OFF
5	< 1s	ON
6	> 3s	OFF
7	< 1s	ON
8	> 3s	OFF
9	< 1s	ON
10	> 3s	OFF

Step 1: Short press “Prog.” button 4 times to start Touchlink pairing.

Step 2: Bring the remote within 10cm of the receiver.

Step 3: Set the remote into Touchlink pairing, please refer to its manual.

Step 4: There shall be indication on the remote for successful link and the connected light will flash.

1. **Only one remote, to control one or more receivers:** directly perform Touchlink pairing between the remote and the receiver.

Step 2: Reset power of another receiver once to enter Zigbee network pairing mode, it will be added by the hub, and the connected light will flash.

Step 5: Touchlink the added receivers and the remotes.

Step 3: There shall be indication on the switch for successful learning.

1. Only one receiver, to be controlled by multiple GP switches: directly perform pairing between the GP switch and the receiver.

Step 4: Pair the added receivers with the GP switches.