

PoE Source Click



PID: MIKROE-6958

PoE Source Click is a compact add-on board designed for implementing a single-port Power over Ethernet source interface, allowing Ethernet data and injected power to be delivered from a local LAN connection to a connected powered device. This board is based on the [MP3921](#), a single-port IEEE 802.3af/at-compliant PSE power controller for Power over Ethernet from [MPS](#). It integrates powered-device detection, single-event and two-event classification, current limiting, disconnected load detection, automatic and I2C software-configurable operation, a 9-bit ADC for voltage and current monitoring, adjustable current limits, and configurable system functions. The board also features an external power supporting up to 50V, selectable interrupt routing, a LED for active power-path indication, and OUT+/OUT- terminals for output voltage measurement. It is suitable for PSE switches and routers, midspan injectors, NVRs, DVRs, IP camera power delivery, and PoE-enabled network systems.

For more information about **PoE Source Click** visit the official [product page](#).

How does it work?

PoE Source Click is based on the MP3921, a single-port IEEE 802.3af/at-compliant PSE power controller for Power over Ethernet from MPS. The MP3921 integrates the key functions required for PoE power sourcing, including powered-device detection, single-event and two-event classification, current limiting, and disconnected load detection. These features allow the board to identify a valid PoE powered device, classify its power requirements, control the power delivery path, and detect when the load has been removed. The device supports both automatic operation and software-configurable operation through an I2C interface, giving the host MCU flexibility to manage PoE behavior according to the needs of the application. This Click board is suitable for Power over Ethernet switches and routers, PSE midspan power

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.




ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

injectors, surveillance network video recorders, digital video recorders, IP camera power delivery systems, and other applications that require controlled single-port PoE power sourcing capabilities.

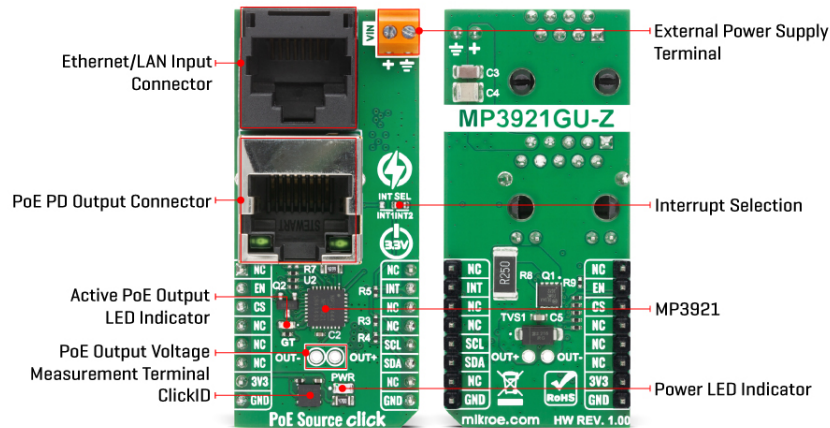

The MP3921 also includes a 9-bit analog-to-digital converter for monitoring current and voltage, adjustable current limits, and configurable system functions. In addition to the communication interface pins, the board includes EN pin for device enable function, and an INT SEL jumper used to select one of the two interrupt outputs available from the MP3921. The INT1 signal provides an interrupt request for all interrupt source events, while INT2 is intended for high-priority interrupt requests, allowing the host controller to distinguish between general and urgent PoE-related events. The board is powered through the external VIN terminal, which supports input voltages up to 50V, providing the supply rail used for PoE power injection.

PoE Source Click also includes two RJ45 Ethernet connectors that allow it to operate as a PoE source or injector between the local Ethernet network and a powered device. The black RJ45 connector is used as the LAN input and should be connected to a router or LAN switch on the same network as the host PC, while the shielded gray RJ45 connector serves as the PoE output for connecting a powered device such as an IP camera. Ethernet data is passed between the two connectors, while the board injects power from the VIN terminal toward the PoE output.

The red GT LED indicates the gate or power-path status and lights up when the PoE output stage is enabled, showing that power delivery toward the connected powered device is active. The OUT+/OUT– terminal provides direct access to the PoE output voltage for measurement and testing purposes, allowing the user to verify the active output voltage with a voltmeter while the powered device remains connected through the PoE Output RJ45 connector.

This Click board™ can be operated only with a 3.3V logic voltage level. Appropriate logic voltage level conversion must be performed before using it with MCUs operating at different logic levels. It also comes equipped with a library containing functions and example code that can be used as a reference for further development.

Specifications

Type	PoE
Applications	Ideal for PSE switches and routers, midspan injectors, NVRs, DVRs, IP camera power delivery, and PoE-enabled network systems

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

On-board modules	MP3921 - single-port IEEE 802.3af/at PSE controller for Power over Ethernet from MPS
Key Features	Single-port IEEE 802.3af/at-compliant PSE power control, powered-device detection, single-event and two-event classification, current limiting, disconnected load detection, automatic operation mode, I2C software-configurable operation, 9-bit ADC for voltage and current monitoring, adjustable current limits, configurable system functions, selectable interrupt outputs, and more
Interface	I2C
Feature	ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on PoE Source Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin	mikroBUS				Pin	Notes
	NC	1	AN	PWM	16	NC	
Device Enable	EN	2	RST	INT	15	INT	Interrupt
ID COMM	CS	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	GP	-	Active PoE Output LED Indicator
JP1	INT SEL	Right	Interrupt Selection INT1/INT2: Left position INT1, Right position INT2

PoE Source Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
External Power Supply	-	-	50	V
ADC Resolution	-	9	-	bit

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Software Support

[PoE Source Click](#) demo application is developed using the [NECTO Studio](#), ensuring compatibility with [mikroSDK](#)'s open-source libraries and tools. Designed for plug-and-play implementation and testing, the demo is fully compatible with all development, starter, and mikromedia boards featuring a [mikroBUS™](#) socket.

Example Description

This example demonstrates the use of the PoE Source Click board for Power over Ethernet (PoE) sourcing. The application reads detection and classification results of the connected powered device (PD), as well as voltage, current, and temperature measurements.

Key Functions

- `poesource_cfg_setup` This function initializes Click configuration structure to initial values.
- `poesource_init` This function initializes all necessary pins and peripherals used for this Click board.
- `poesource_default_cfg` This function executes a default configuration of PoE Source Click board.
- `poesource_read_vin` This function reads and calculates the input voltage value.
- `poesource_read_vout` This function reads and calculates the output voltage value.
- `poesource_read_iout` This function reads and calculates the output current value in mA.

Application Init

Initializes the logger and PoE Source Click driver, and applies the default configuration.

Application Task

Reads and parses detection/classification results, measures input voltage, output voltage, output current, and die temperature, and logs the results to the serial terminal.

Application Output

This Click board can be interfaced and monitored in two ways:

- Application Output - Use the "Application Output" window in Debug mode for real-time data monitoring. Set it up properly by following [this tutorial](#).
- UART Terminal - Monitor data via the UART Terminal using a [USB to UART converter](#). For detailed instructions, check out [this tutorial](#).

Additional Notes and Information

The complete application code and a ready-to-use project are available through the NECTO Studio Package Manager for direct installation in the [NECTO Studio](#). The application code can also be found on the MIKROE [GitHub](#) account.

Resources

[mikroBUS™](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

Downloads

[PoE Source click example package](#)

[PoE Source click 2D and 3D files v100](#)

[PoE Source click schematic v100](#)

[MP3921 datasheet](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).