


Phototransistor Optocoupler **multicomp**^{PRO}

**RoHS
Compliant**

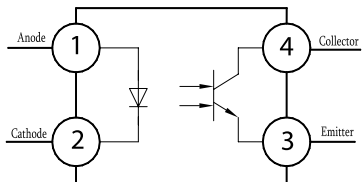

Features:

- Current transfer ratio
- (CTR: 80~600% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$)
- High isolation voltage between input and output ($V_{iso} = 3750\text{V rms}$)
- Collector - emitter breakdown voltage $BV_{CEO} \geq 80\text{V}$
- Operating Temperature: $-55^\circ\text{C} \sim 110^\circ\text{C}$

Applications:

- Switching power supply, intelligent meter
- Industrial control, measuring instruments
- Office equipment such as copiers
- Household appliances: such as air conditioners, fans, water heaters, etc.

Mechanical Data

- Case: SSOP4
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Maximum Ratings: @ $T_A 25^\circ\text{C}$ unless otherwise specified.

	Parameter	Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current *1	I_{FM}	1	A
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	70	mW
Output	Collector Power Dissipation	P_C	150	mW
	Collector Current	I_O	50	mA
	Collector-Emitter Voltage	V_{CEO}	80	V
	Emitter-Collector Voltage	V_{ECO}	7	V

Phototransistor Optocoupler **multicomp**PRO

Thermal Characteristics

Parameter	Symbol	Value	Unit
Total Power Dissipation	P _{TOT}	200	mW
Isolation Voltage ^{*2}	V _{ISO}	3750	Vrms
Rated Impulse Isolation Voltage	V _{IOTM}	5000	V
Rated Repetitive Peak Isolation Voltage	V _{IORM}	600	V
Thermal Resistance Junction-to-Air	R _{θJA}	430	°C/W
Thermal Resistance Junction-to-Case	R _{θJC}	350	°C/W
Thermal Resistance Junction-to-Lead	R _{θJL}	368	°C/W
Operating Temperature	T _{OPR}	-55 ~ +110	°C
Storage Temperature Range	T _{STG}	-55 ~ +125	°C
Soldering Temperature ^{*3}	T _{SOL}	260	°C

Notes

1. Pulse width ≤ 1μs, Duty ratio: 0.001
2. 40 to 60% RH, AC for 1 minute
3. For 10 seconds

Electrical Characteristics @ TA = 25°C unless otherwise specified

Parameter		Symbol	Test conditions	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Peak Forward Voltage	V _{FM}	I _{FM} = 0.5A	-	-	3.0	V
	Reverse Current	I _R	V _R = 4V	-	-	10	μA
	Input Capacitance	C _{in}	V _R = 0V, f = 1kHz	-	30	250	pF
Output	Collector-Emitter Dark Current	I _{CEO}	V _{CE} = 20V, I _F = 0	-	-	100	nA
	Collector-Emitter Breakdown Voltage	B _{VCEO}	I _C = 0.1mA, I _F = 0	80	-	-	V
	Emitter-Collector Breakdown Voltage	B _{VECO}	I _E = 10μA, I _F = 0	7	-	-	V
Transfer Characteristics	Collector Current	I _C	I _F = 5mA, V _{CE} = 5V	2.5	-	30	mA
	Current Transfer Ratio	C _{TR}	I _F = 5 mA, V _{CE} = 5V	80	-	600	%
	Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _F = 20mA, I _C = 1mA	-	0.1	0.2	V
	Isolation Resistance	R _{ISO}	V _{IO} = 500V DC 40~60% R.H.	1×10 ¹²	-	-	Ω
	Isolation current	R _{isc}	6000V DC, 40~60%R.H	-	-	2	μA
	Floating Capacitance	C _{IO}	V _{IO} = 0, f = 1MHz	-	0.6	1.0	pF

Phototransistor Optocoupler **multicomp**PRO

Parameter		Symbol	Test conditions	Min.	Typ.	Max.	Unit
Transfer Characteristics	Cut-off frequency	f _c	V _{CE} = 5V, I _c = 2mA R _L =100Ω, -3dB	-	80	-	kHz
	Turn On Time	T _{on}	V _{CE} =2V, R _L = 100Ω I _C =2mA		4	18	μs
	Turn Off Time	T _{off}			3	18	

Rank Table of Current Transfer Ratio CTR

Rank Mark	Min. (%)	Max. (%)	Condition
A	80	160	$I_F = 5mA, V_{CE} = 5V$
B	130	260	
C	200	400	
D	300	600	
No mark	80	600	

Ratings and Characteristics Curves: (@ $T_A = 25^\circ C$ unless otherwise specified)

Fig.1 Allowable Forward Current vs. Ambient Temperature

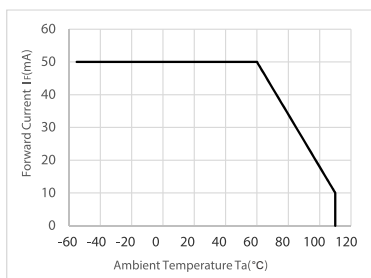


Fig.2 Allowable collector power dissipation vs. Ambient Temperature(°C)

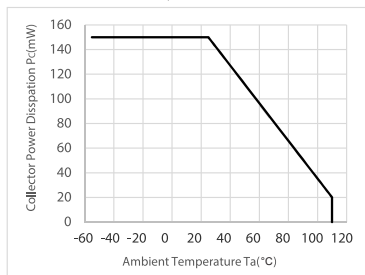


Fig.3 Relative Current Transfer Ratio vs. Forward Current

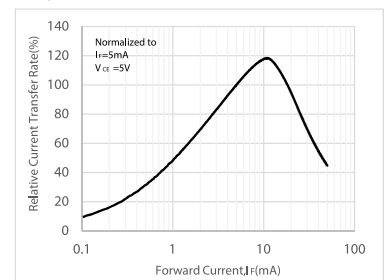


Fig.4 Forward Current vs. Forward Voltage

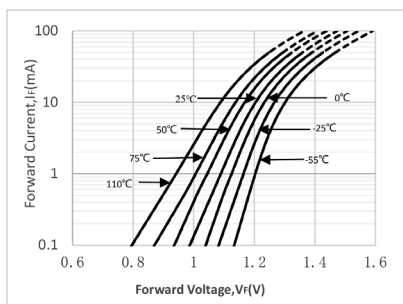


Fig.5 Collector Current vs. Collector-emitter Voltage


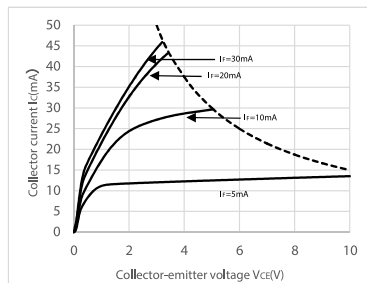


Fig.6 Relative Current Transfer Ratio vs. Ambient Temperature

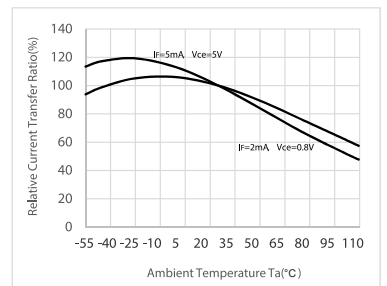

Phototransistor Optocoupler **multicomp**PRO

Fig.7 Collector-emitter Saturation Voltage vs. Ambient Temperature

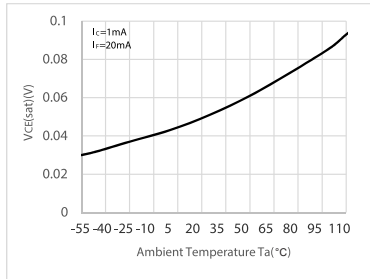


Fig.8 Collector Dark Current vs. Ambient Temperature

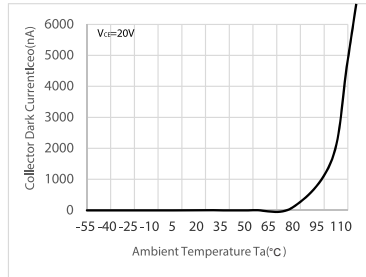


Fig.9 Response Time vs. Load Resistance

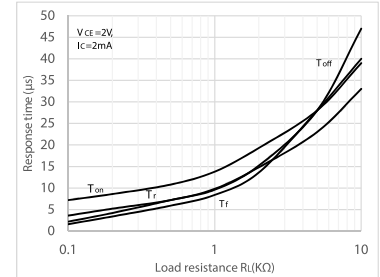


Fig.10 Frequency Response

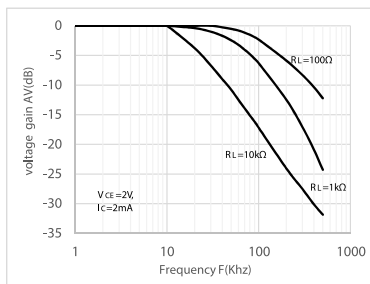


Fig.11 Collector-emitter Saturation Voltage vs. Forward Current



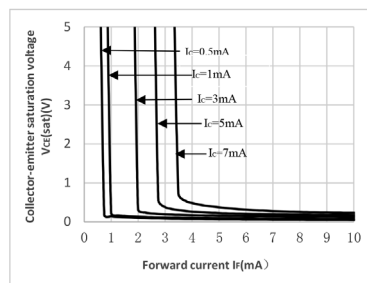


Fig.12 Switching Time Test Circuit & Waveforms

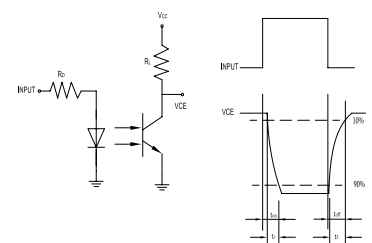

Outline Dimensions

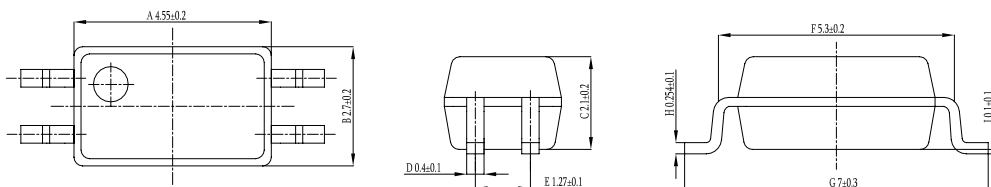

Part Number Table

Description	Part Number
Optocoupler, Phototransistor, 50mA, 80V, 3750Vrms, CTR 80 to 600	BL3H7
Optocoupler, Phototransistor, 50mA, 80V, 3750Vrms, CTR 80 to 160	BL3H7A
Optocoupler, Phototransistor, 50mA, 80V, 3750Vrms, CTR 130 to 260	BL3H7B
Optocoupler, Phototransistor, 50mA, 80V, 3750Vrms, CTR 200 to 400	BL3H7C
Optocoupler, Phototransistor, 50mA, 80V, 3750Vrms, CTR 300 to 600	BL3H7D

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO