

L2004A PANEL FUSEHOLDER




Design facilitates use for size 0 fuse links. Both the L2004A and L2004A/F are fully finger-proof fuseholders having a special inner sleeve which prevents accidental contact when the fuse link is being inserted. They have been designed to meet the safety requirements of IEC 257 and BS 415. Mounting on the panel is through a single hole shaped to engage the anti-swivel flats on the fuseholder.

They will accept either 6.3 x 0.81mm or 4.75 x 0.81mm solderless snap on connectors. Supplied with a black removable bezel which snaps into place over the front flange.

- L2004A is low profile with a slot in the head to facilitate fuse link removal.

CURRENT RATING:	10A (to IEC 257) 15A (temperature rise to 40°C)
TEMPERATURE RANGE:	-25°C to 85°C (ambient)
BREAKDOWN VOLTAGE:	>4kV
INSERTION RESISTANCE	5 milliohms (average)
INSULATION RESISTANCE	≥100 megohms
PANEL THICKNESS (MAX):	4mm
FIXING TORQUE:	1.2 Nm
HUMIDITY:	21 days (BS2011 – IEC 68-1)
MATERIAL:	Glass filled polyester
APPROVALS:	UL, CSA, VDE, SEMKO

ORDERING REFERENCE: L2004A

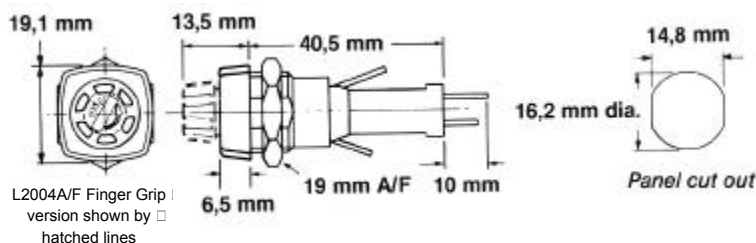

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England

Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>