Siretta
Enabling Industrial IoT

Echo 67

25 x 25 mm Active Ceramic Patch GPS L1 Embedded Antenna



Active
Integrated LNA

Embedded
Installation

GPS
L1 Antenna

General Description

The Echo 67 is an active embedded GPS antenna developed for equipment requiring stable reception of the 1575.42 MHz L1 band. Its PCB-mount construction, as well as its integrated LNA, ground plane and cable assembly makes integration into OEM products easy and straightforward.

An integrated low-noise amplifier (LNA) enhances weak L1 GNSS signals directly at the antenna, reducing the effects of system noise before the signal reaches the host device. Delivering a reliable 27 dB of top-hemisphere gain, the Echo 67 provides strong right-hand circular polarisation for accurate position updates and robust satellite tracking.

Weighing only 12 grams, this 25 by 25 mm patch antenna is ideal for space-constrained electronic equipment where reliable L1 GNSS reception is required.

Pre-fitted with a 100 mm miniature coaxial cable assembly for easy integration with any I-PEX MHF1 and UFL compatible module (other cable lengths and connector types are available for high volume requirements).

Key Features

- Supports GPS L1, Galileo E1, BeiDou B1C, and QZSS L1
- Integrated LNA for enhanced satellite signal reception
- Top hemisphere RHCP gain up to 30.38 dBiC
- Excellent impedance matching for efficient signal transfer
- Compact PCB-mount design for straightforward OEM integration

Typical Applications

- Industrial automation and process control equipment
- Vehicle telematics and fleet management systems
- Surveying and mapping equipment
- Smart infrastructure and monitoring systems
- Precision agriculture and guidance equipment

Siretta
Enabling Industrial IoT

Echo 67

25 x 25 mm Active Ceramic Patch GPS L1 Embedded Antenna

Electrical Specifications

Impedance:	50 Ohm
Polarisation:	RHCP
Frequency Range:	1575.42 MHz
Return Loss:	-20.90 dB
VSWR:	1.20
Ground plane:	tested on 70 x 70 mm ground plane
RHCP Gain:	27 ±3 dBiC
Axial Ratio at Zenith:	14.88 dB
Supply Voltage:	3 - 5 V DC
Current Consumption:	≤ 11 mA

Environmental Specifications


Operating Temperature range:	-40°C to 80°C
Storage Temperature range:	-40°C to 80°C

Mechanical Specifications

Dimensions:	L = 25 mm W = 25 mm H = 7 mm
Weight:	12 g
Cable Type:	Miniature Coaxial
Cable Length:	100 mm
Connector:	U.FL / I-PEX MHF I
Mounting method:	Embedded

Echo 67

25 x 25 mm Active Ceramic Patch GPS L1 Embedded Antenna

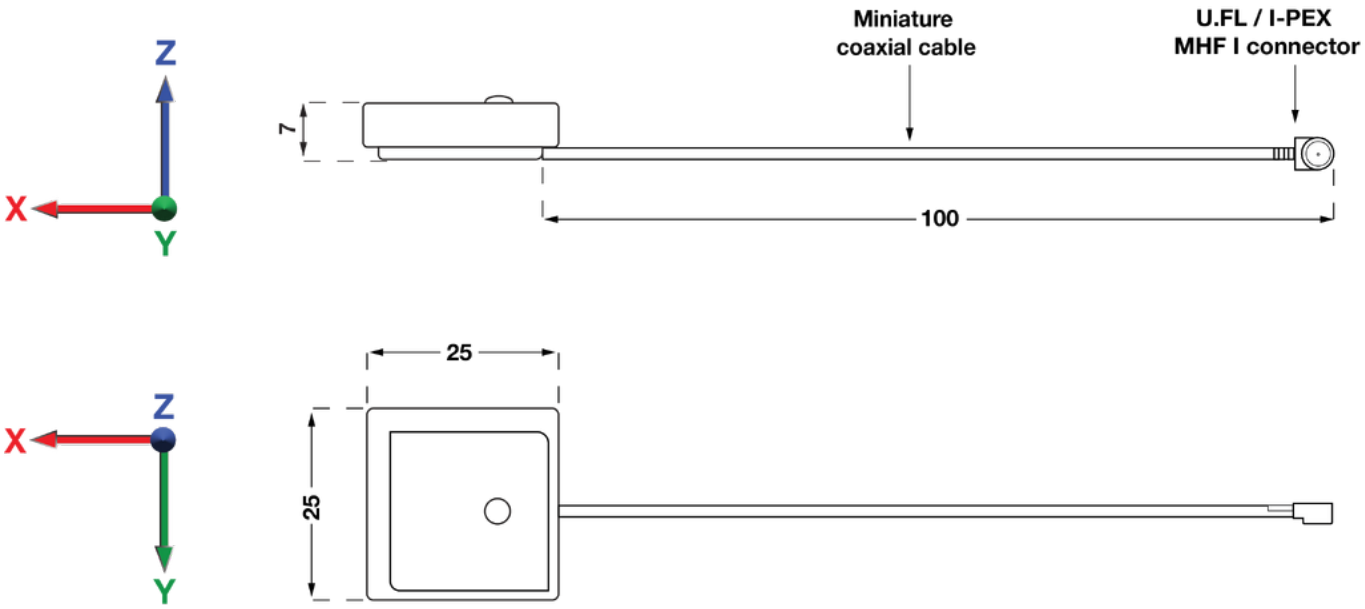

Note: Dimensions in mm

Siretta
Enabling Industrial IoT

Echo 67


25 x 25 mm Active Ceramic Patch GPS L1 Embedded Antenna

Spectrum Coverage*

GPS		
Band	Frequency	Use Indicator
L5	1176.45	↓
L2	1227.6	↓
L1	1575.42	↑

NavIC		
Band	Frequency	Use Indicator
L5	1176.45	↓

GLONASS		
Band	Frequency	Use Indicator
L3OC	1202.025	↓
L2OF, L2OC	1246	↓
L1OF, L1OC	1602	↓

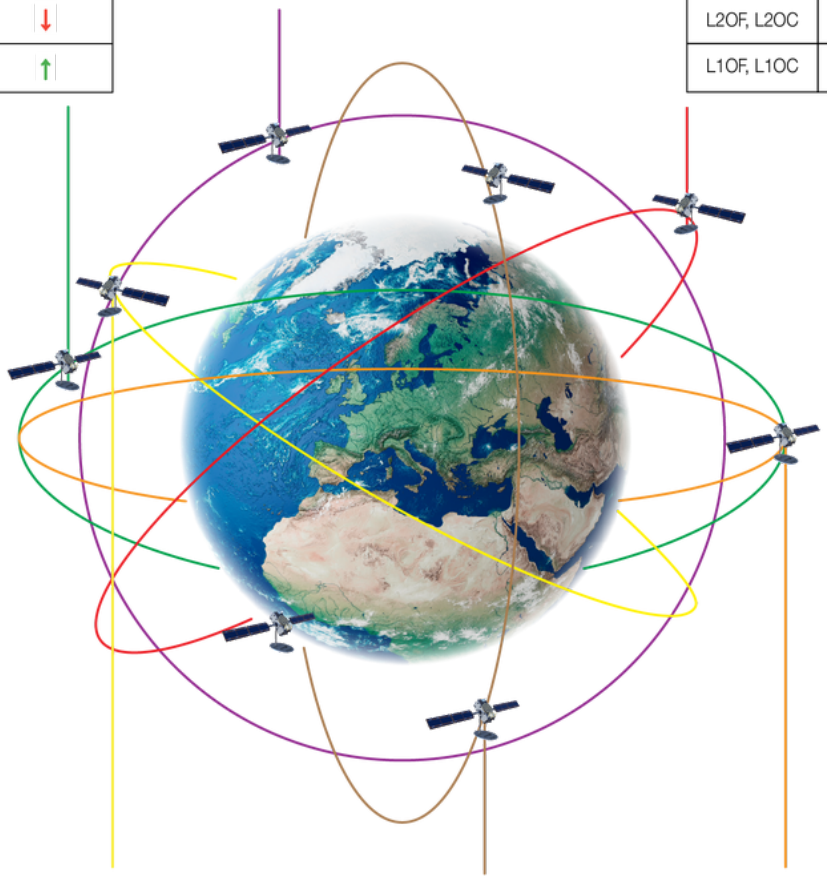

Galileo		
Band	Frequency	Use Indicator
E5a	1176.45	↓
E5b	1207.14	↓
E6-I, E6-Q	1278.75	↓
E1-I, E1-Q	1575.42	↑

BeiDou		
Band	Frequency	Use Indicator
B2a	1176.45	↓
B2I, B2b	1207.14	↓
B3I	1268.52	↓
B1I	1561.098	↓
B1C	1575.42	↑

QZSS		
Band	Frequency	Use Indicator
L5	1176.45	↓
L2	1227.6	↓
L6	1278.75	↓
L1	1575.42	↑

↑ Suitable band ▢ Adequate band in good signal conditions ↓ Likely to be unsuitable


GNSS Standards Band Support


Electrical Interface			Spherical RF Measurements			
Centre Frequency (MHz)	VSWR	Return Loss (dB)	Average RHCP Gain (dBiC)	Peak RHCP Gain (dBiC)	Median Axial Ratio (dB)	Minimum Axial Ratio (dB)
1575.42	1.2000	-20.8982	23.22	30.38	13.52	0.26

Top Hemisphere RF Measurements					Zenith RF Measurements	
Centre Frequency (MHz)	Average RHCP Gain (dBiC)	Peak RHCP Gain (dBiC)	Median Axial Ratio (dB)	Minimum Axial Ratio (dB)	RHCP Gain at Zenith (dBiC)	Axial Ratio at Zenith (dB)
1575.42	26.49	30.38	15.18	2.02	29.97	14.88

RF Matching Performance


This section illustrates the antenna's impedance matching characteristics across the operating frequency range using VSWR and Return Loss measurements.

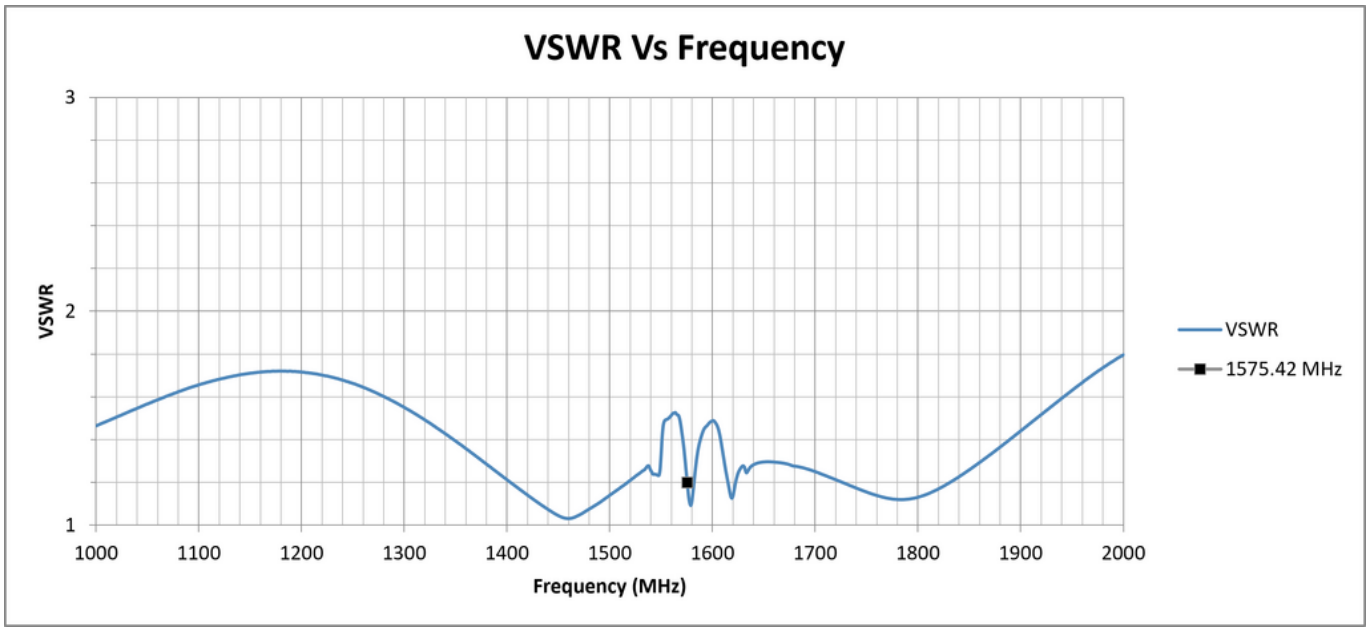


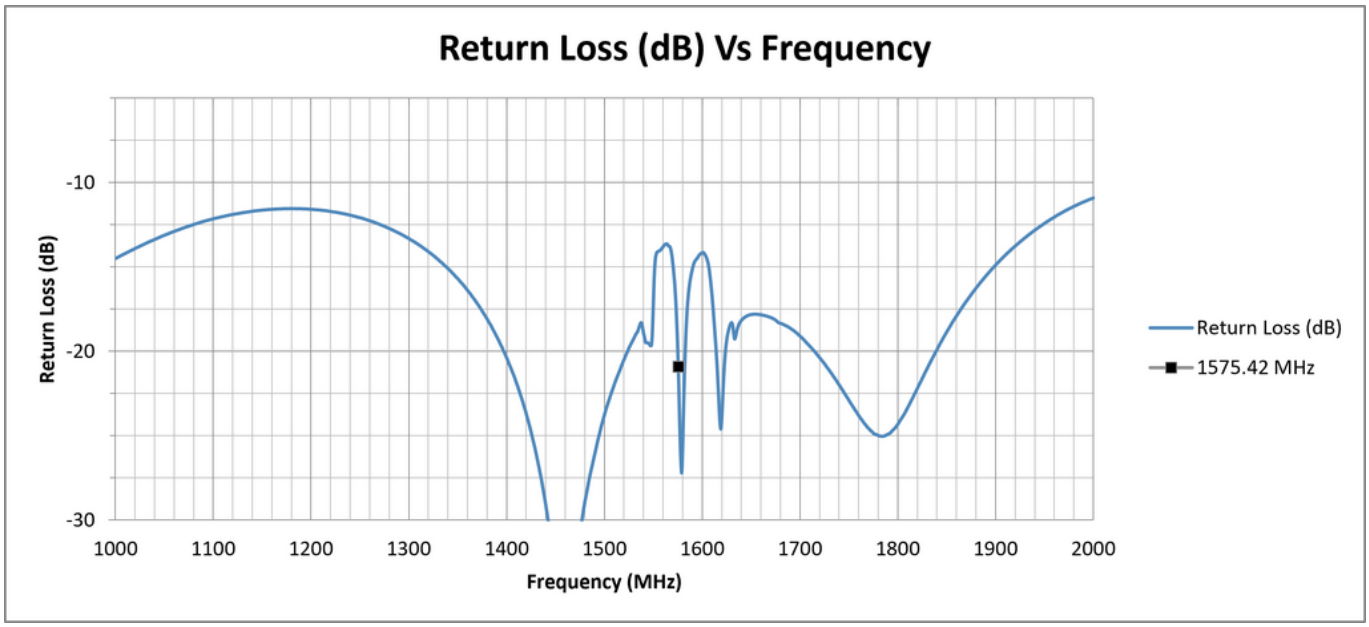

RF Zenith


The following graph represents the RHCP Gain at Zenith as a function of frequency. These measurements indicate how well the antenna performs when receiving signals directly from satellites overhead (zenith direction). A higher RHCP gain ensures strong signal reception.




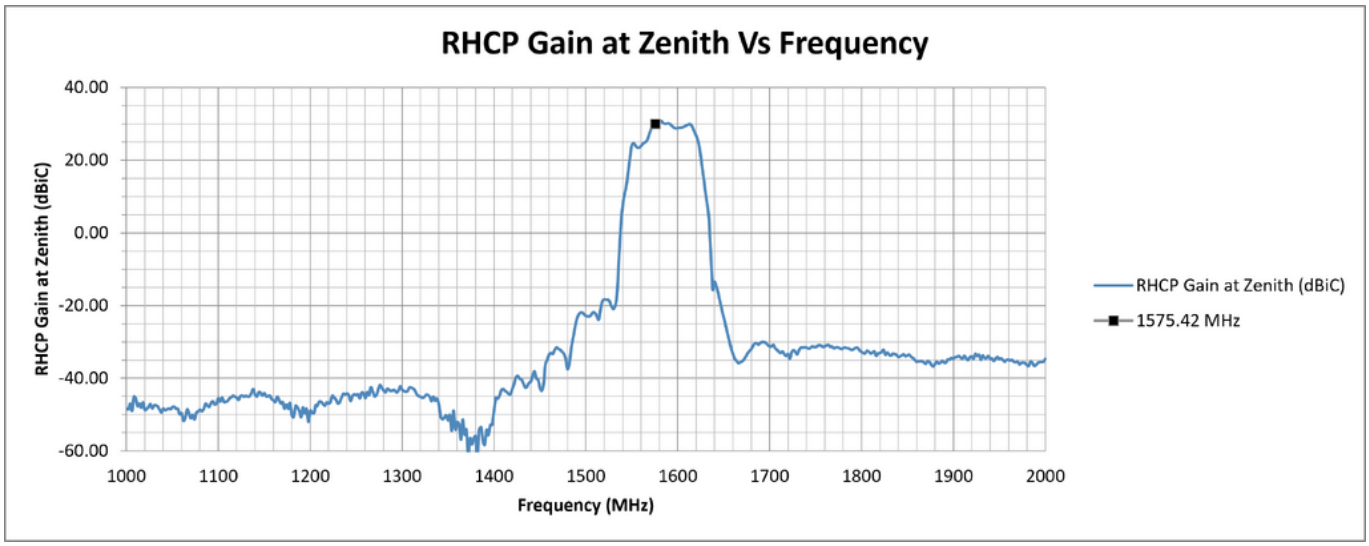


RF Top Hemisphere

The following graphs show the Average and Peak RHCP Gain in the Top Hemisphere. These measurements assess how effectively the antenna receives signals from satellites positioned in the upper half of the sky. Strong RHCP gain in this region is critical for reliable GNSS reception, especially in environments where satellites may not always be directly overhead.




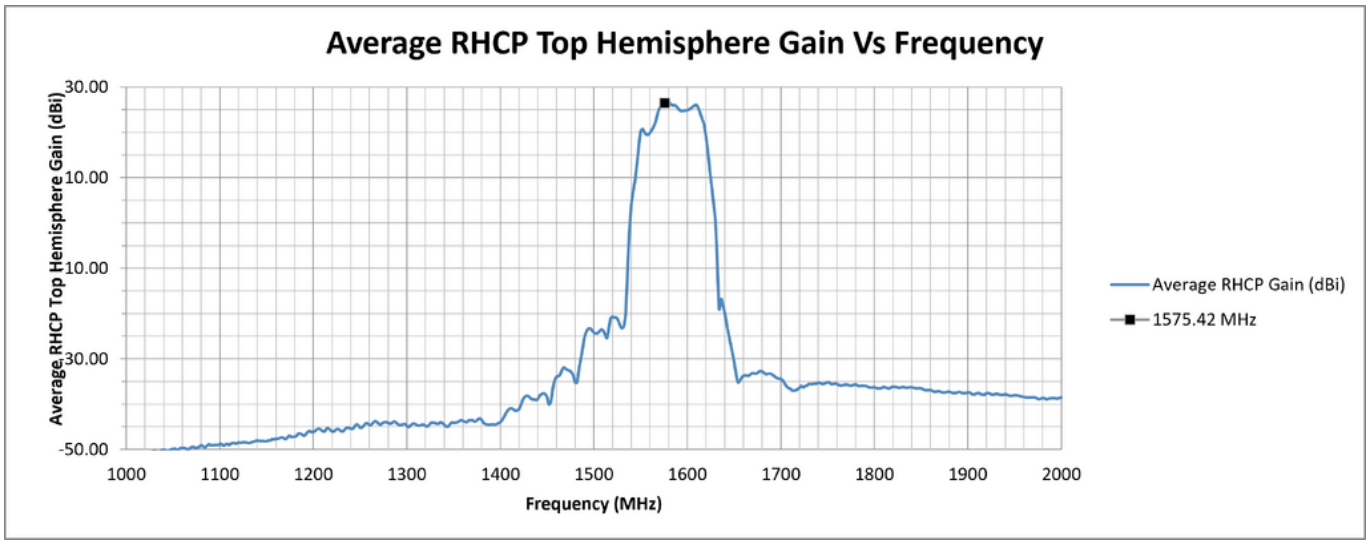


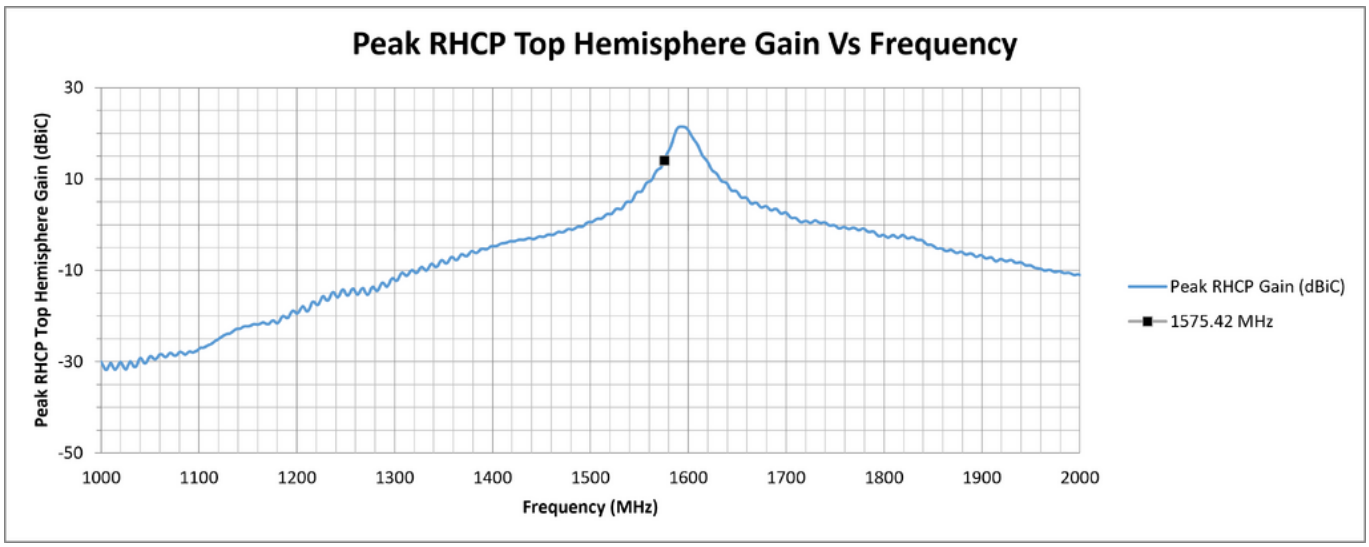


RF Spherical


The following graphs display the Average and Peak RHCP Gain across the entire spherical coverage of the antenna. These metrics provide a comprehensive view of the antenna's ability to receive signals from satellites at all elevations and directions.
Consistently high gain across the sphere ensures strong and stable GNSS reception in a variety of operating conditions.



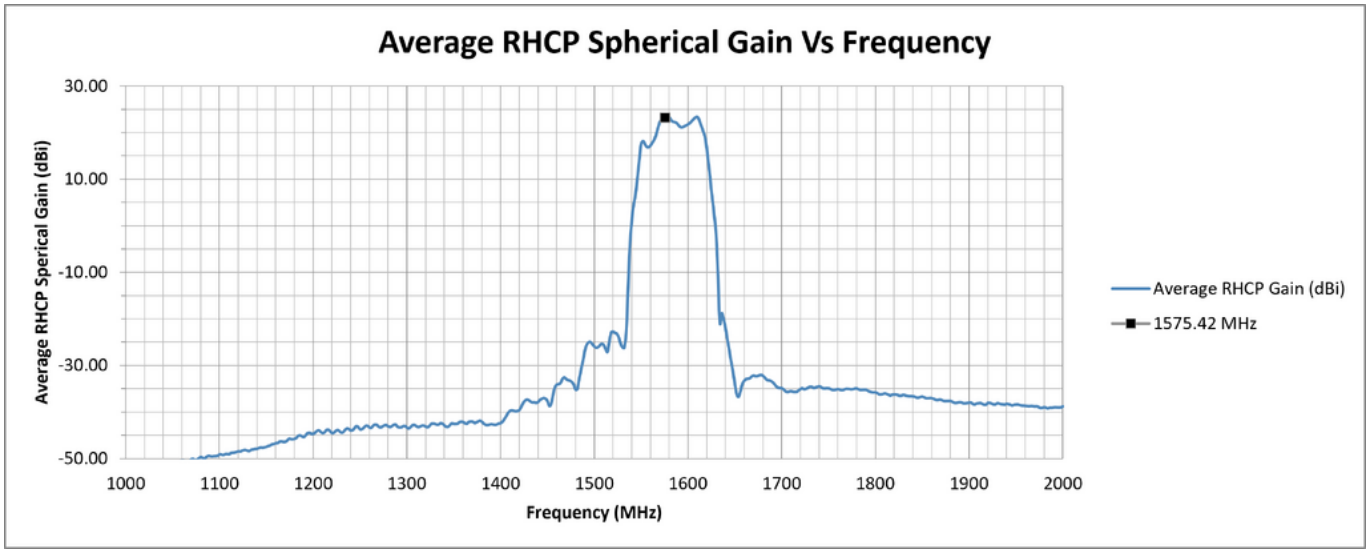


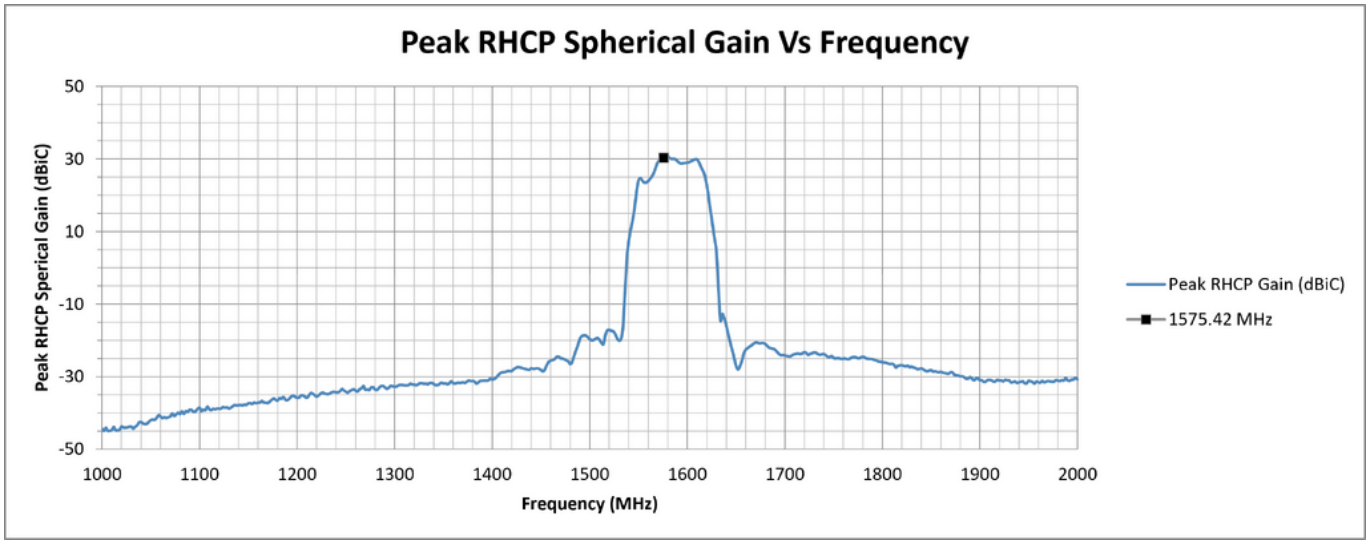



Test Setup (on 70 x 70 mm Ground Plane)

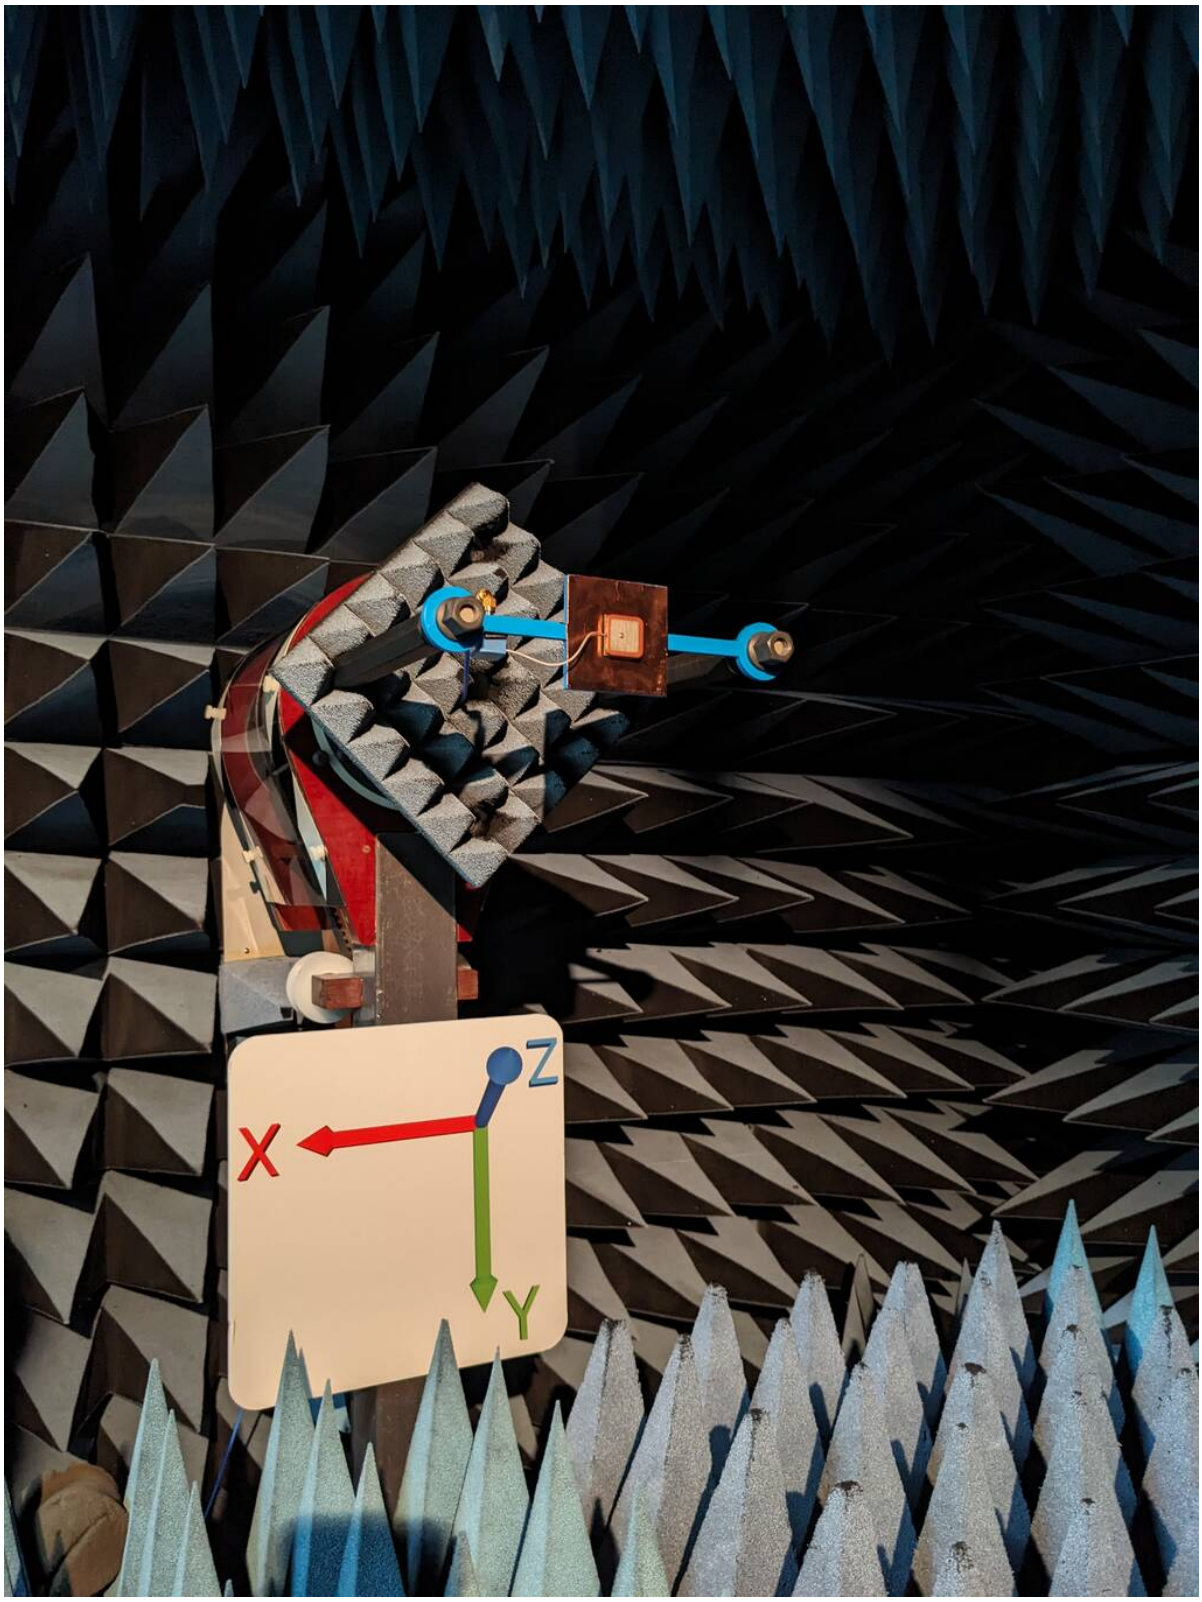


2D Radiation Plots (1575.42 MHz)

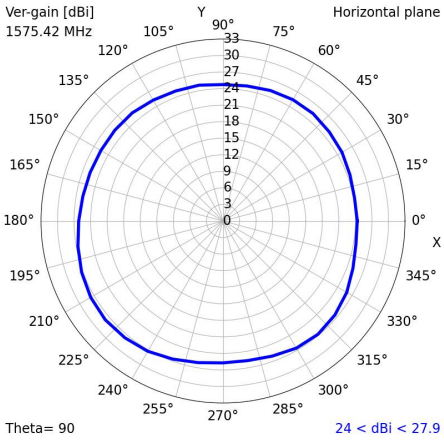

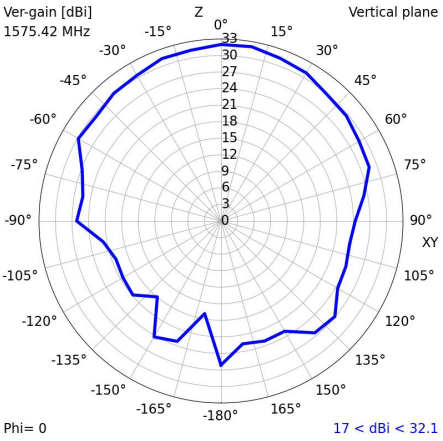

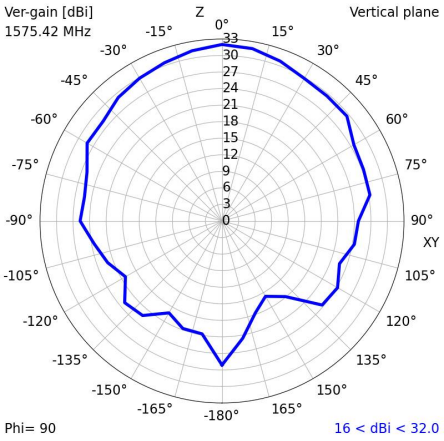

3D Radiation Plots (1575.42 MHz)

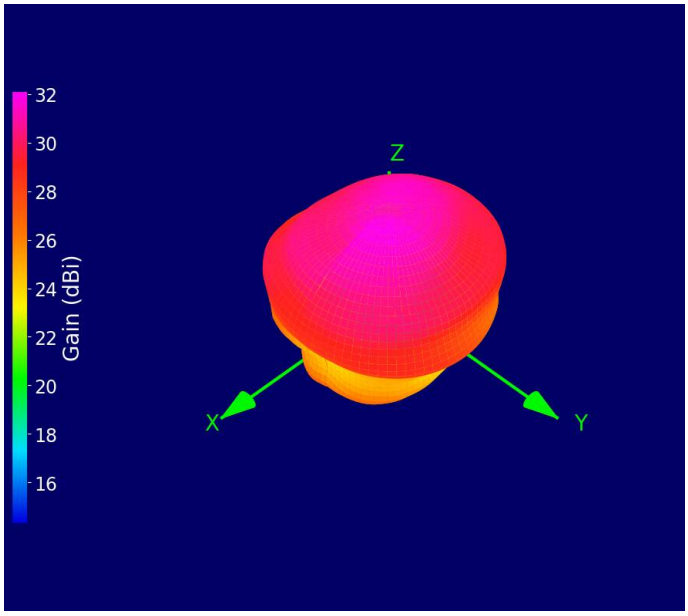

Ordering Details

Part Number	Description
ECHO67/0.1M/UFL/S/S/48	25 x 25 mm Active Ceramic Patch GPS L1 Embedded Antenna 0.1 Metre Miniature Coaxial Cable and U.FL / I-PEX MHF I Connector

About Siretta

Founded in 1998 and headquartered in Reading, United Kingdom, Siretta is a leading wireless communications company specialising in the design, manufacture, and supply of industrial IoT solutions.

Siretta's product portfolio includes:

- Antennas, plus their associated Cable Assemblies & Adapters
- Cellular Network Analysers
- Industrial Modems
- Industrial Routers
- Associated Cloud Management

Siretta supplies products directly and via a worldwide network of distributors, into numerous markets and applications across the globe.
Siretta’s distribution partners range from industrial IoT specialists through to global catalogue organisations.

Whether “off the shelf” or custom solutions are required, Siretta has a wide portfolio of products to fit many types of application.

Siretta’s extensive knowledge and experience in the wireless market allows support of a wide range of customer applications, focusing on frequencies between 400 MHz to 6 GHz. These encompass modems, routers and antennas for:

- Cellular technologies: GSM / UMTS / LTE / 5G NR (SA & NSA)
- LPWAN technologies: LTE-M / NB-IoT
- Global positioning technologies: GNSS (GPS / GLONASS / Galileo / BeiDou / QZSS / NavIC)
- Short range technologies: Wireless LAN / Bluetooth / Zigbee / ISM band / LoRa / Sigfox
- Satellite technologies: NTN NB-IoT

With a heavy emphasis on design, Siretta has a team of dedicated Engineers and Product Managers, who specialise in wireless applications.
Siretta continually makes significant investment in R&D endeavouring to provide customers with market leading, future-proofed, wireless solutions. Siretta works closely with many technology partners to stay at the forefront of industrial IOT.

Antenna Disclaimer

The information contained in this document is proprietary to Siretta Ltd. Siretta Ltd has made every effort to ensure that the information contained within this document is accurate. Siretta Ltd does not make any warranty as to the information contained within this document and does not accept any liability for any injury, loss or damage of any kind incurred using this information.

Siretta Ltd does not take responsibility for the performance, installation, or operation of any antenna, wireless device, or communication system used in conjunction with the products characterised in this document. It is the responsibility of the installer and system integrator to ensure that all products are installed and operated in

accordance with applicable regulatory, safety, and local compliance requirements within the country of use.

Performance characteristics, coverage, gain, and network operation may vary depending on installation environment, device configuration, network conditions, cable losses, mounting position, and surrounding structures. Any application deployed using Siretta antenna products should be fully evaluated and tested within the intended operating environment prior to deployment.

Siretta Ltd reserves the right to make modifications, additions, and deletions to this document due to typographical errors, inaccurate information, or improvements to the product at any time and without notice. Such changes will be incorporated into new editions of this document.

Please refer to the Siretta wiki for the latest version of this document.

***IMPORTANT NOTE**
For each frequency band, Siretta provides a traffic light indication to show the suitability of the antenna for use at that frequency band. Determination of exactly what makes an antenna good or bad at any frequency is subjective.

The view presented is that of Siretta's engineering team having taken into account the efficiency and VSWR measurements. The end user is advised to use their own criteria and/or testing to confirm suitability.

Copyright Information

Copyright Declarations

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language without the written permission of Siretta Ltd. This product includes software code subject to the GNU General Public License ("GPL"). For details of the terms of the GPL, and information on obtaining access to the GPL code used, are available on request by emailing support@siretta.com GPL code used in this product is distributed WITHOUT ANY WARRANTY and is subject to the copyrights of one or more authors. For details, see the GPL code for this product and the terms of the GPL.

Trademarks
Windows, Microsoft and Excel are registered trademarks of Microsoft Corporation. Siretta Ltd is an independent business and is neither affiliated with, nor authorized, sponsored, or approved by, Microsoft Corporation. All other trademarks are the property of their respective owners.

© 2026 Siretta Limited