

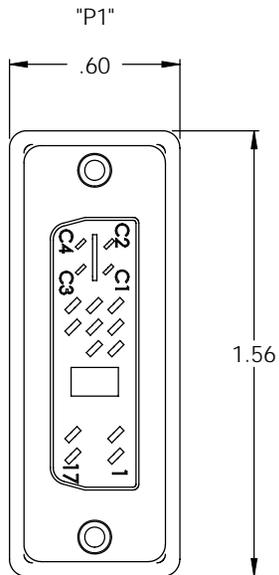


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	CHANGED PVC BODY MOLDING (ECN# 1263)	12/9/02	T CLARK
C	CORRECTED WIDTH DIMENSION OF D-SUB HOOD (ECN# 1451)	8/6/03	T CLARK
D	ECN1641: ADDED COMPONENT SPECIFICATION TABLE	1/15/04	DFP
E	ECN# 2831 ADDED UL94V-0 RATED TO INSULATOR MATERIAL	04/26/07	C.BERUBE

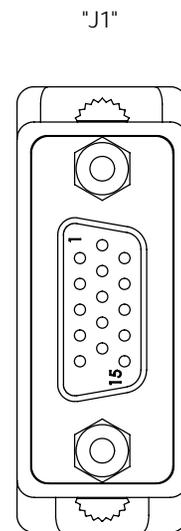


MALE DVI-A CONNECTOR

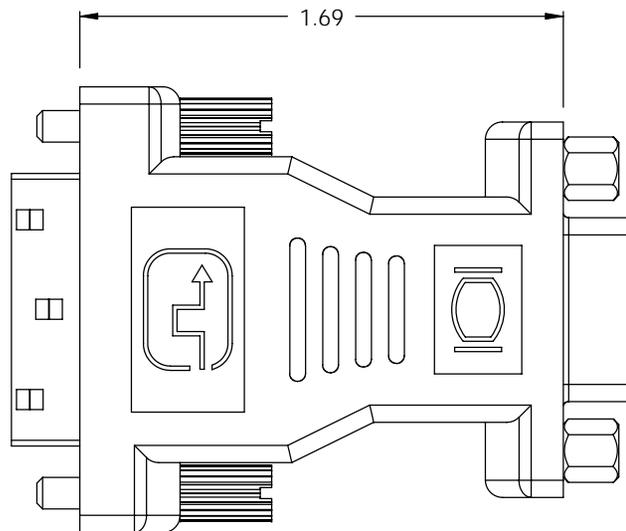

FEMALE 15-PIN HIGH DENSITY D-SUB CONNECTOR

WIRING TABLE	
"P1"	"J1"
C5	6, 7, 8
C4	13
C3	3
C2	2
C1	1
15	5, 10
14, 16	9
8	14
7	12
6	15
SHELL	SHELL

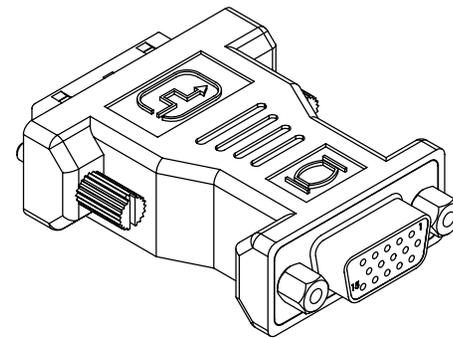

Component Specifications	
Material	
Housing	PVC Color: Gray
Connector Shell	SPCC
Connector Insulator	THERMOPLASTIC UL94V-0
Connector Contact	Brass
Hardware	Brass or Steel
Internal Shielding	Copper foil
Finish	
Connector Shell	Tin over Nickel
Contact	Gold
Electrical	
Current Rating	1.5 A
Voltage rating	40 VDC, 500Vac (rms)
Insulation Resistance	1000MΩ
Contact Resistance	20mΩ max
Environmental	
Operating Temperature range	-20°C to 85°C

CS-211

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 X ±.1
 XX ±.05
 XXX ±.005
 CABLE LENGTH TOLERANCE
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY T CLARK	4/6/2002
CHECKED BY D PARHAM	4/12/2002
APPROVED BY C MCCORMICK	4/12/2002

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com 45 BEECHWOOD DRIVE
 CONNECTIVITY PRODUCTS NORTH ANDOVER, MA
 PRODUCTS 01845

PRODUCT DESCRIPTION
 DVI-A ADAPTOR

DRAWING TITLE
 OUTLINE DRAWING

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	DMB601MF-OD1	E
SCALE: NONE	CAD FILE: DMB601MF-OD1.SLDDRW	SHEET 1 OF 1	