

Dimensions shown are ANSI standards

Classification:	“Cylindrical Lithium”
Chemical System:	Lithium/Iron Disulfide (LiFeS ₂)
Designation:	ANSI 15-LF, IEC-FR6
Nominal Voltage:	1.5 V
Storage Temp:	0°C to 40° C (32°F to 104°F)
Operating Temp:	-20° C to 60° C (-4° F to 140° F)
Typical Weight:	16.2 gm
Typical Volume:	8.0 cubic centimeters (0.5 cubic inch)

Max Discharge: (single battery only)	2A continuous 2A Pulse (2Sec on /28Sec off)
Max Rev Current:	10 uA
Typical Li Content	1.0 gm
Typical IR:	60 to 100 milliohms*
Freshness Guarantee:	15 years at 21°C


Transportation:	For complete details, please refer to latest ICAO Technical Instructions and IATA DGR
------------------------	---

United States: 49 CFR 173.185

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com




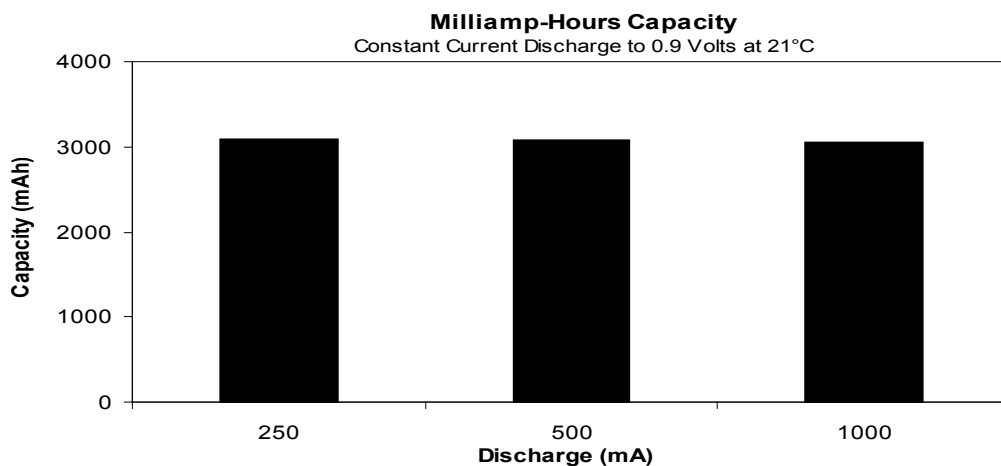


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.




LF1500
Size: AA (FR6)
Lithium Iron DiSulfide Battery


Li/FeS₂

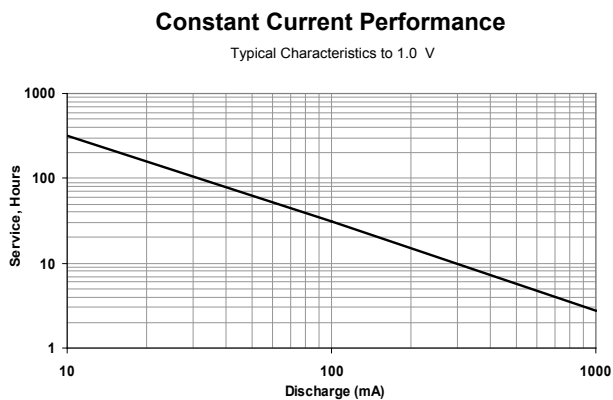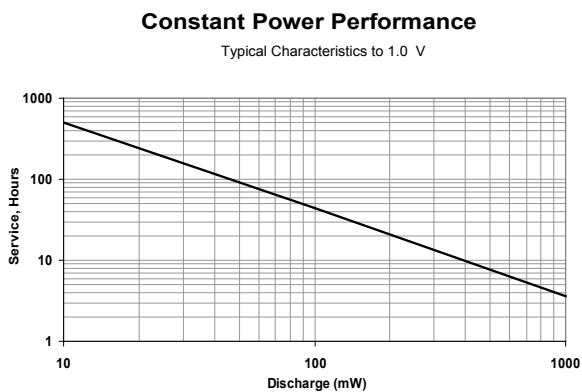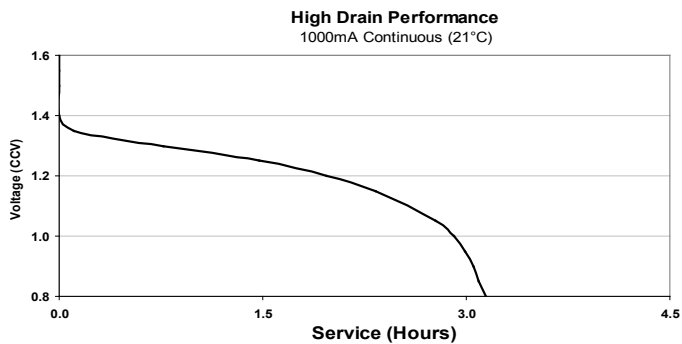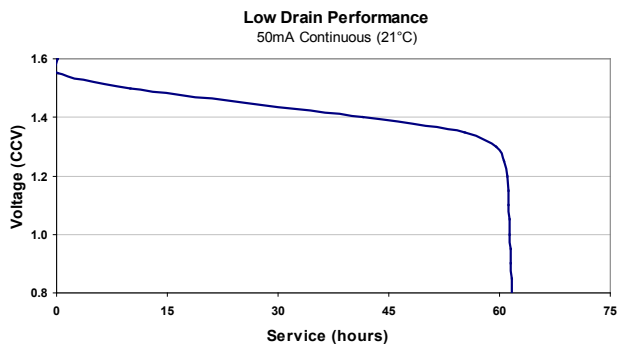


Application Tests (21°C)

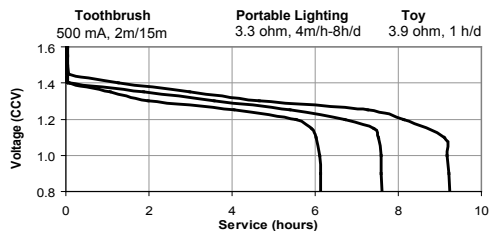

Application Tests (21°C)

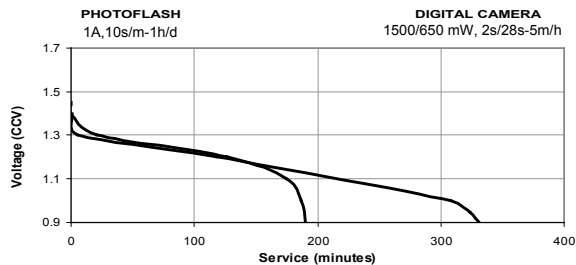

Application Tests (21°C)

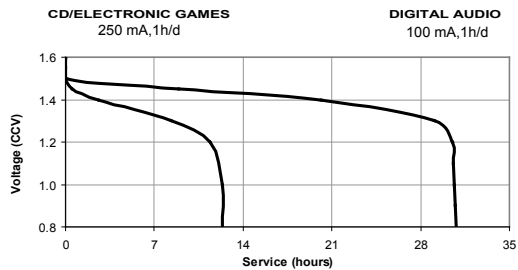

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.