

本製品は、ルネサス エレクトロニクス製のプログラミング機能付きオンチップ・デバッグ・エミュレータ E1 を使用して、マイコンの動作を試すためのターゲット・ボードです。


①RL78/I1A ターゲット・ボード(QB-R5F107DE-TB)の特徴

- RL78/I1A(R5F107DEMSP)搭載
- メイン・クロック 4MHz(発振子を利用)で最大 32MHz の動作可能(2.7V~5.5V 供給時)
- ユニバーサル・エリア(2.54mm ピッチ)を搭載
- フラッシュ・メモリ・プログラミング、オンチップ・デバッグに両対応(TOOL0 端子使用)
- マイコンの端子を周辺ボード・コネクタに配置した高拡張性
- 鉛(Pb)フリー対応品

②ハードウェア仕様

CPU R5F107DEMSP	メイン・クロック動作周波数	最大 32MHz(ボード上の発振子 4MHz を使う場合)
	サブクロック動作周波数	32.768KHz(ボード上に搭載) SSP-T7-F SII 社製
搭載部品	CN1,CN2: 周辺ボードコネクタ(2.54mm ピッチ) 19pin ソケット x2(パッドのみ)	
	CN3: 14pin コネクタ(E1 接続用)	
	Power LED: 赤 x1(LED3)	
	評価用 LED: 黄 x2(LED1 は P75,LED2 は P76 へ接続)	
	評価用 SW: SW1(INTPO へ接続)	
	メイン・クロック(OSC1): 4MHz 発振子(X1,X2 へ接続)	
	サブクロック(OSC2): 32.768KHz 発振子(XT1,XT2 へ接続)	
動作電圧	2.7V~5.5V(OSC1:4MHz 発振子使用時)	

③寸法、部品配置など

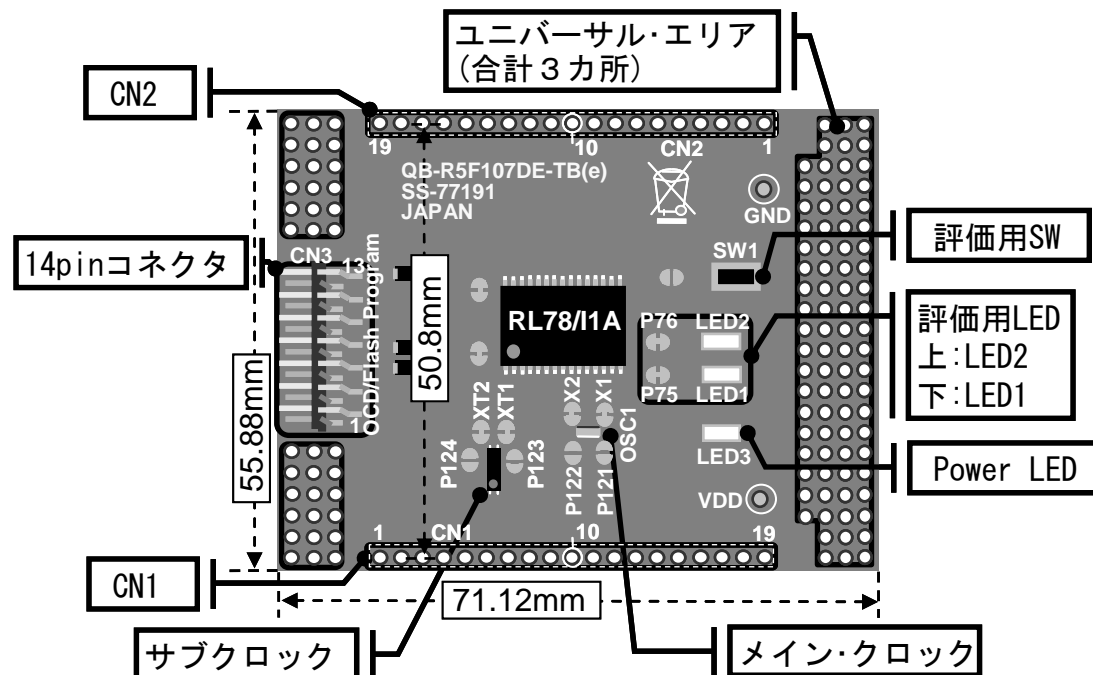

基板上的パターンについて:パターンをカットすることで、その回路はオープンとなります。

再度接続させたい場合は半田ショートしてください。

P75,P76 を使用する場合は LED の左のショートパッドをパターンカットしてください。

④使用上の注意

- ・本製品に関するサポートはお受けしておりません。初期不良の場合に限り、交換いたします。
- ・本製品に搭載しているマイコンには制限があります。詳細は 3 ページを参照してください。

The QB-R5F107DE-TB is a target board used for evaluating microcontroller operations, using the E1, the Renesas Electronics on-chip debug emulator with programming function (hereinafter referred to as E1).


(1) RL78/I1A target board (QB-R5F107DE-TB) features

- Incorporates RL78/I1A (R5F107DEMSP).
- A 4 MHz resonator mounted as main clock, high-speed operation enabled at 32 MHz (@ 2.7 to 5.5V)
- Equipped with universal area (2.54 mm pitch)
- Supports both flash memory programming and on-chip debugging (using TOOL0 pin)
- Highly extendable; peripheral board connectors are equipped with microcontroller pins
- Lead-free (Pb-free) product

(2) hardware specifications

CPU R5F107DEMSP	Main clock operating frequency	32 MHz max. (when use 4MHz resonator mounted on board)
	Subclock operating frequency	32.768KHz (mounted on board) SSP-T7-F SII Co.,Ltd
Embedded parts	CN1, CN2: Peripheral board connectors (2.54 mm pitch), 19-pin socket x 2 (pad only)	
	CN3: 14-pin connector (for E1 connection)	
	Power LED: Red x 1 (LED3)	
	Test LED: Yellow x 2 (LED1 connected to P75, LED2 connected to P76)	
	Test SW: SW1 (connected to INTPO)	
	Main clock (OSC1): 40 MHz resonator(connected to X1 and X2) Subclock (OSC2): 32.768 KHz resonator (connected to XT1 and XT2)	
Operating voltage	2.7 to 5.5 V(when 4MHz resonator used at OSC1)	

(3) Dimensions and parts layout

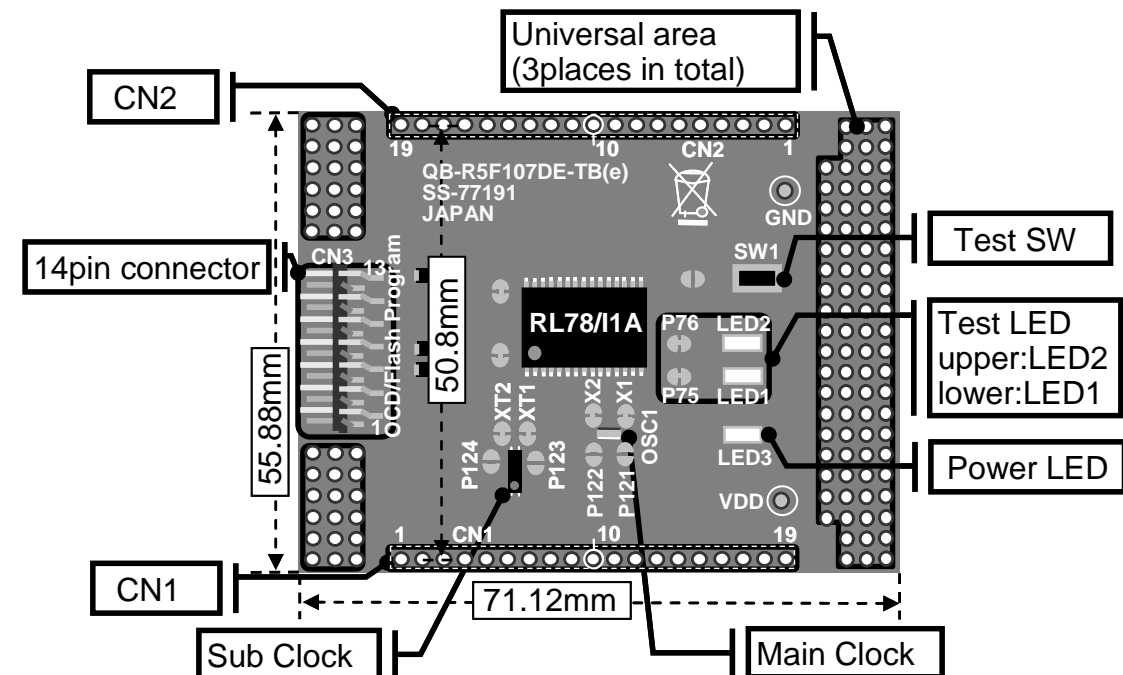

Pattern on the board: Splitting this wiring leaves open the relevant circuit.

To reconnect the circuit, short the circuit by soldering.

When using P75 and P76, cut off the short pad on the right side of LED.

(4) Notes on use

- Renesas Electronics will not provide any support for this board, but the board can be exchanged with a new product only when it has an initial failure.
- The microcontroller of this product has the limitation. Please refer to page 4 for details.

