

Outdoor Pushbutton Timer energystandard

Pushbutton Timer Delay Switch – Three Wire (L in-L out-N). For all load types

Elkay



Fitting and operation instructions

This product can ONLY be used with the back box supplied and can be used in outdoor and bathroom applications. Failure to use the back box provided will invalidate the warranty. It is essential that the correct IP66 rated connections are made to keep the IP66 rating of the back box maintained.

1. Take the surface mount box and remove knockouts as required. Ideally remove with a hole saw for cleanest effect and remove any burrs. Drill a small 3mm drain hole at the back of the box in the position marked 'DRAIN'. Drill outwards from the inside of the box.
2. Mount the surface mount box on a secure surface using the mounting pack supplied. Place screw cover seal over the rear mounting screws after screwing the box to the wall.
3. It is essential to maintain the IP rating with all connections to the box. Please use a suitable M20 cable gland and use appropriate sealing washers. For steel wired armoured connections to the box use a nylon 20mm seal to maintain IP rating. Seals have been provided for your convenience.
4. Prior to fitting ensure mains power is switched OFF and live in, live out and neutral wires are

Features

Time Delay: 2min-1hr

Voltage: 240Va.c. 50Hz

Load Rating & Type: 10A for all electrical load types including lighting loads that are LED, Compact Fluorescent and Fluorescent, Incandescent and Resistive. This switch can also switch contactors provided a capacitor is fitted across the coil.


IP rating: IP66

identified. Where applicable remove metal back box lugs that are not being used.

5. Securely fit live in, live out and neutral wires into terminals marked Lin, Lout & N.
6. Turn mains power ON. Put the product in 10-15 second test mode.
7. Press the Elkay Push Button timer button to switch the load ON. The Elkay Push Button timer will turn the Load OFF automatically once the required time delay selected has elapsed.
8. The Timer can also act as an on/off switch. Press to turn switch ON and to turn OFF simply press and hold the timer button for 3 seconds and the load will switch off immediately.
9. Set the required time delay with reference to Timing Diagram.
10. Once the installation is fully tested and working as required ensure the timer is secured to the back box.
11. A capacitor will be required when switching low power or low energy lighting. For example: LED, 2-D fittings, energy saving lamps, etc. One capacitor per circuit must be fitted at the light fitting. Elkay Capacitor Product Code PFCC-1.

Timing Diagram


Please note that the **black bar** denotes the position of the dip switch

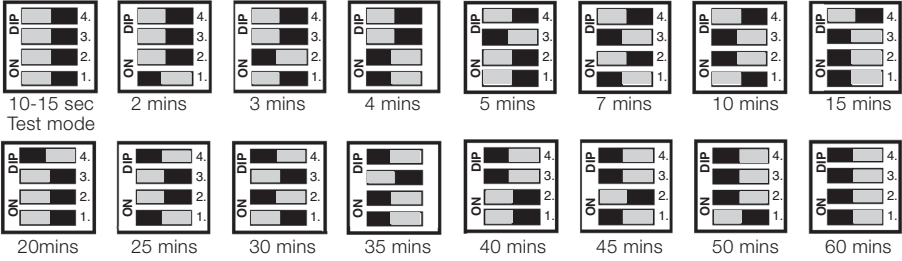

Wiring Diagram

Single switching

Multiple switching

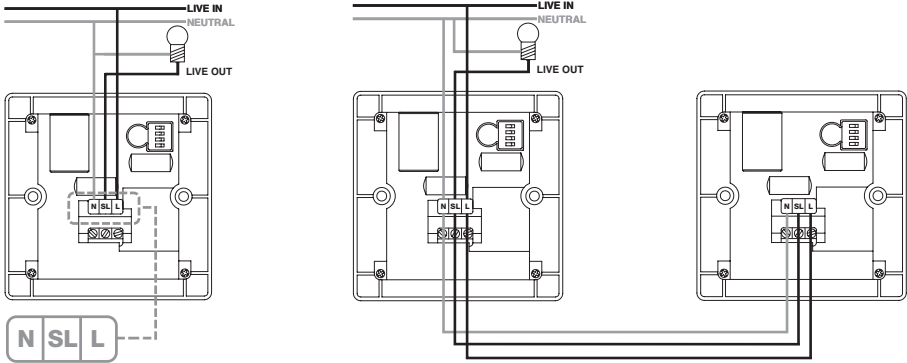

IMPORTANT NOTICE All wiring should be carried out by a competent person or qualified electrician and be fitted to current IEE Edition wiring regulations.

RPM-490

UK Head Office, Station Road, Coleshill, Birmingham B46 1HT
 Tel: +44 (0) 1675 468 222 Fax: +44 (0) 1675 464 930
www.elkay.co.uk

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice.

Power and productivity
 for a better world™

