

K3745 IEC-C5 Appliance Cord

1. FLEXIBLE CORD

1.1 Construction and Dimensions

Conductor	Annealed copper wire.	
Insulation	PVC (Brown, Blue, Yellow/Green).	
	Mean value of thickness: 0.60mm.	
	Minimum value of thickness: 0.50mm.	
Sheath	Mean value of thickness: 0.90mm.	
	Minimum value of thickness: 0.80mm	

1.2 Physical Characteristics of Insulation and Sheath

ITEM		UNITS	VALUE	
Rated Voltage		V/V	250/440	
Number of conductors		No.	3	
Conductor	Nominal Area	mm ²	0.75	
	Construction	No./mm	42/015 24/020	
	Outer Diameter	mm	1.3	
Thickness of Insulation		mm	0.60	
Thickness of Sheath		mm	0.80	
Nominal Overall Diameter		mm	6.6 ± 0.2	
Conductor Resistance at 20°C		Ω/ΚΜ	26.0 max	
Test Voltage		V/Min	2000/15	
Insulation Resistance at70°C		MΩ Km	0.011 min	

1.3 Characteristics of Insulation and Sheath

ITEM			UNIT	VALUE
Insulation	Original	Tensile Strength	M. Pa	12.5
		Elongation	%	170
	After Aging	Tensile strength variation from original value	%	75
	100 ±2°C for 504 hours	Elongation variation from original value	%	65
Sheath	Original	Tensile Strength	M. Pa	12.5 min
		Elongation	%	150 min
	After Aging 100 ±2°C for 240 hours	Tensile strength variation from original value	%	75
		Elongation variation from original value	%	65

1.4 Flame Resistance

The sample shall be self extinguishing after all burning has ceased.

1.4 Cord Flexibility

There will be no cracks on the surface of cord sample which is wound six turns on a mandrel of 4~5xOD (OD: wire diameter) and subjected to a temperature of - $15 \pm 2^{\circ}$ C for 4 hours.

COMMUNICATIONS PTYLID	www.accesscomms.com.au/specs/k3745spec.pdf	Page 1 of 4



2. PVC PLUG

2.1 Appearance

There shall be no damage shown on the surface of the plug.

2.2 Insulation Resistance

Shall not be less than 500M Ω at 20°C, 500V DC.

2.3 Dielectric Strength

It shall withstand 2000V AC applied between the conductors for 1 minute without breakdown.

2.4 Load Test

1. Flexible Cord Anchorage Test

Each blade shall be capable of withstanding a straight pull of 11.22KGF (110 \pm 1N) over a period of 10 seconds. The pull shall be increased uniformly to the appropriate value, maintained at that value for a further 10 seconds and then released. This test shall be performed three times.

2. Fixing of Blade

A specimen of the plug shall be heated to a temperature of $50^{\circ}C \pm 20^{\circ}C$ for 1 hour and each blade of the plug shall not be displaced more than 2.38mm when a force of 6.12KGF (60 ± 0.6N) is applied to the blade for 10 minutes. The direction of the force shall be along the length of the blade towards and away from the body of the plug.


2.5 Flexing Test

The specimen shall not show any damage in appearance and not more than 10% of the strands of each conductor shall be broken after the following test.

The oscillating member shall be moved through an angle of 90° (45° on either side of the vertical), the number of flexes being 1000 and the rate of flexing 60 per minute. A flexing is a movement in one direction. The cord shall be loaded with a weight of 10N, for a nominal area of 0.75mm²; 20N for a nominal area of 1.0mm². For a circular-section cord, the oscillating member shall be turned through 90° after 5000 times.



3. PRODUCT DRAWING

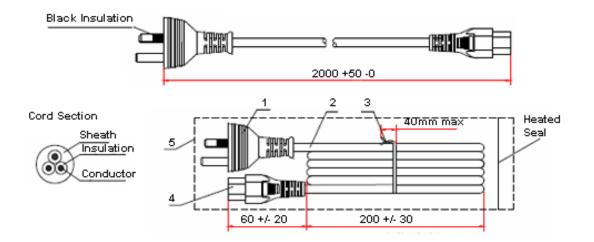

Cord Marking:

Powermaster GD-3 3 \times 0.75mm 4V-75 V-75 $\,$ 75°C ORDINARY DUTY 250v/440v NSW18155 AS/NZS3191 $\,$ Cn

Roll No: 1,2,3... China Factory


- 1. PVC moulded plug (Black)
- 2. Flexible cord GD-3 3G0.75mm² (Black)
- 3. Vinyl tie (Black)
 - a. Tied twice with PVC vinyl tie
 - b. Vinyl tie loose end section must not exceed 40mm
- 4. PVC moulded connector (Black)
- 5. PE bag 300mm x 130mm (0.05mm thick)

NOTE: All materials are RoHS compliant.


www.accesscomms.com.au/specs/k3745spec.pdf





4. MAINS PLUG

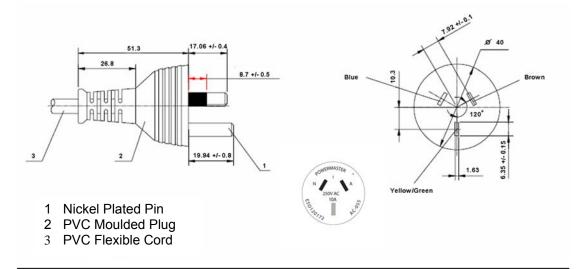

5. IEC-C5 PLUG

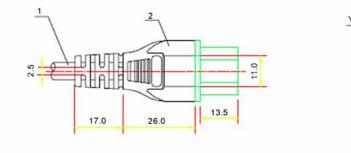







Side A: Side B: ESO110632 C5 POWERMASTER 2.5A 250V~

1 PVC Flexible Cord

2 PVC Moulded IEC-C5 Connector

Tolerances:

>20.0mm	± 2.0mm
≤20.0mm	± 1.0mm
≤10.0mm	± 0.5mm
≤ 1.0mm	± 0.3mm

www.accesscomms.com.au/specs/k3745spec.pdf

Page 4 of 4