



EVQ6626-F-00A

40V, 0.8A, Hex Half-Bridge Motor Driver with Serial Input Control Evaluation Board, AEC-Q100 Qualified

DESCRIPTION

The EVQ6626-F-00A is an evaluation board designed to demonstrate the capabilities of the MPQ6626, a six half-bridge motor driver with serial input control. The input voltage (V_{IN}) ranges from 5.5V to 40V, with up to 0.8A of output current (I_{OUT}) capability.

The six half-bridges of the MPQ6626 can be controlled separately via a standard serial data interface, and have various diagnostic functions, including shorted output, open load, over-temperature (OT), over-voltage (OV), and under-voltage (UV).

The MPQ6626 has a very low quiescent current (I_Q) in standby mode, and requires a minimum number of readily available, standard external components. The MPQ6626 is available in a TSSOP-28EP package, and is AEC-Q100 Grade 1 qualified.


The MPQ6626 is suitable for motor drivers, telecommunication half-bridge power supplies, and avionics DC/DC converters.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$, unless otherwise noted.

Parameters	Conditions	Value
Input power supply voltage (V_s) range		5.5V to 40V
Maximum output current (I_{OUT})		0.8A

EVQ6626-F-00A EVALUATION BOARD

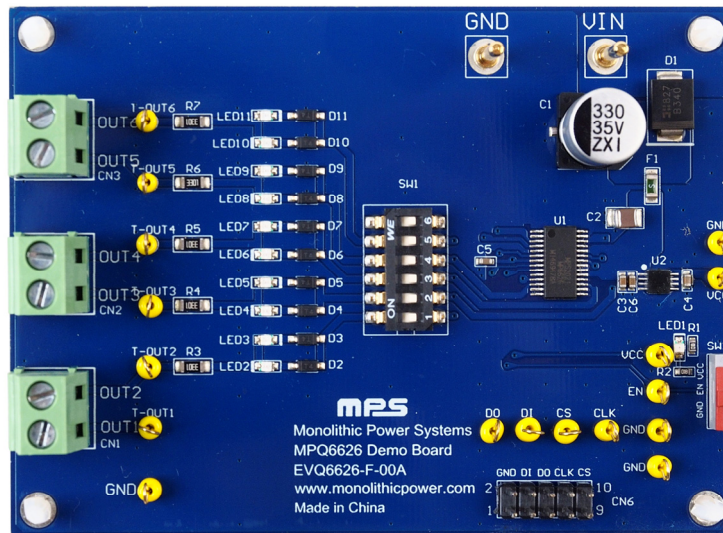

LxWxH (9.7cmx7.2cmx2.5cm)

Board Number	MPS IC Number
EVQ6626-F-00A	MPQ6626GF-AEC1

QUICK START GUIDE

The EVQ6626-R-00A evaluation board is easy to set up and use to evaluate the performance of the MPQ6626. For proper measurement equipment set-up, refer to Figure 1 and follow the steps below:

1. Pull SW2 down to enable the IC.
2. Apply external SPI signals to CN6.
3. Connect the loads from OUT1 to OUT6.
4. The 3.3V logic power supply is on the board.
5. Connect the V_{IN} power supply terminals (recommended operating voltage range is 5.5V to 40V) to:
 - a. Positive (+): VIN
 - b. Negative (-): GND

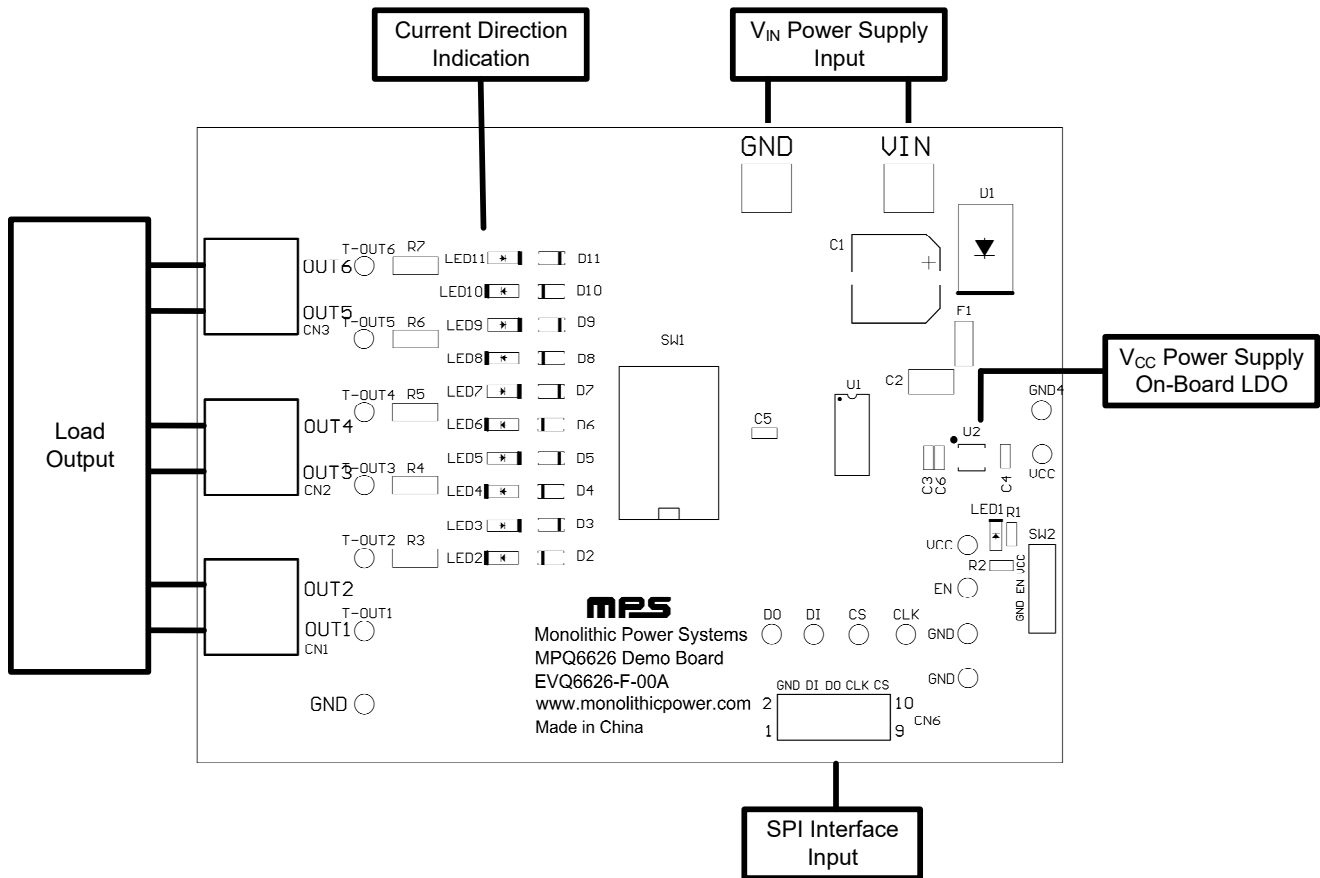


Figure 1: Test Set-Up for the EVQ6626-F-00A

The EVQ6626-F-00A also includes monitors and a GUI interface:

Monitor Set-Up:

1. For H-bridge applications, the rotation direction of the DC motors can be observed via the LED circuit, which is enabled when SW1 is turned on.
2. All pins are accessible via test points.

GUI Operation Illustration:

Figure 2 shows the very simple control interface for the multi-channel half-bridges.

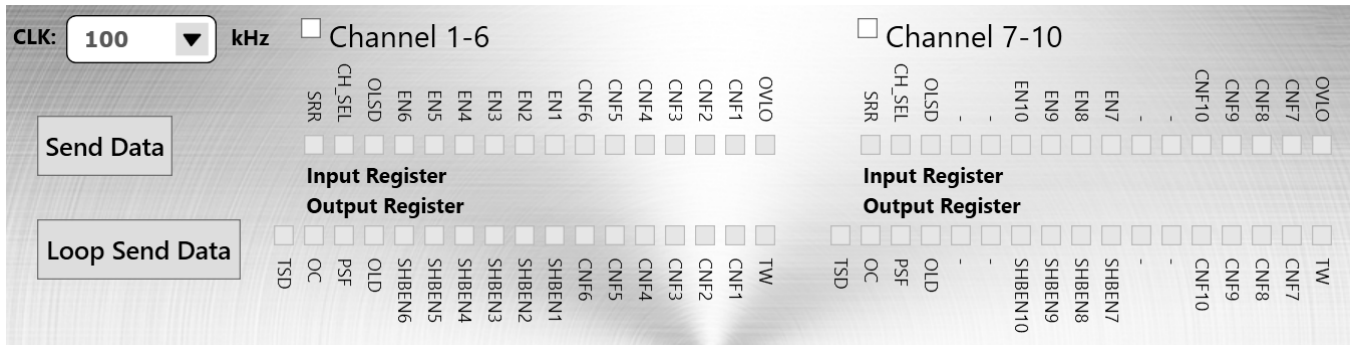


Figure 2: EVQ6626-F-00A GUI Interface

1. Select the SPI clock frequency using the CLK drop-down menu.
2. Select the “Channel 1-6” box to activate input register configuration. All bits can be set flexibly.
3. Ignore the “Channel 7-10” box.
4. Click “Send Data” to send serial data once, or click “Loop Send Data” to send data repeatedly with a fixed frequency.
5. All the register bits are labeled, making it is easy to find the output register status.

EVALUATION BOARD SCHEMATIC

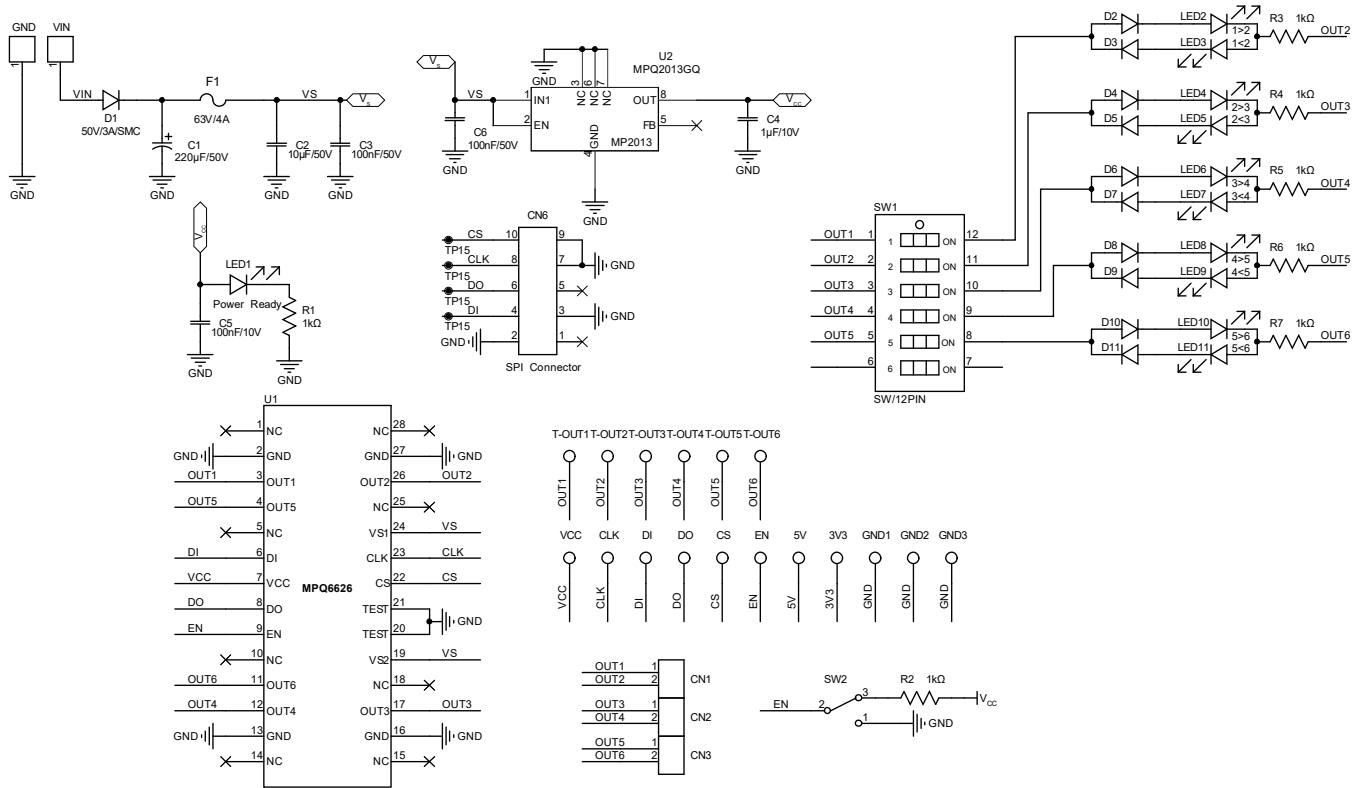


Figure 3: Evaluation Board Schematic

EVQ6626-F-00A BILL OF MATERIALS


Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
17	3.3V, CLK, CS, DI, DO, EN, GND1, GND2, GND3, OUT1, OUT2, OUT3, OUT4, OUT5, OUT6, VCC, VS1	1mm	Test points	SIP	Custom	
1	C1	330 μ F	Electrolytic capacitor, 35V	SMD	Panasonic	EEV-TG1J221Q
1	C2	10 μ F	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H106KA12L
3	C3, C5, C6	100nF	Ceramic capacitor, 50V, X7R	0603	Murata	GCJ188R71H104KA12D
1	C4	4.7 μ F	Ceramic capacitor, 6.3V, X5R	0603	Murata	GRM188R60J475ME19D
3	CN1, CN2, CN3	2mm	Connector, 2-pin	DIP	Würth	691216510002
1	CN6	2.54mm	Dual line connector	DIP	Custom	
1	D1	40V	Diode, 3A	SMC	Diodes, Inc.	B340
10	D2, D3, D4, D5, D6, D7, D8, D9, D10, D11	75V	Diode, 0.15A	SOD-123	Diodes, Inc.	1N4148W
1	F1	63V	Fuse, 4A	1206	Cooper	CC12H4A
2	GND, VIN	2mm	Connector	SIP	Custom	
1	LED1	20mA	Red LED	0805	Bright LED	BL-HUE35A-AV-TRB
10	LED2, LED3, LED4, LED5, LED6, LED7, LED8, LED9, LED10, LED11	20mA	Green LED	0805	Bright LED	BL-HGE36A-AV-TRB
2	R1, R2	1k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-071KL
5	R3, R4, R5, R6, R7	3.3k Ω	Film resistor, 1%	1206	Yageo	RC1206FR-073K3L
1	SW2	500mA	Switch, 3-pin	DIP	Würth	450301014042
1	SW1	25mA	Switch, 6-bit	SMD	Würth	418121270806
1	U2	MPQ2013A	3.3V step-down regulator	QFN-6 (2mmx2mm) or QFN-8 (3mmx3mm)	MPS	MPQ2013AGQ-33-Z
1	U1	MPQ6626	Half-bridge motor driver with serial input control	TSSOP-28EP	MPS	MPQ6626GF

EVB TEST RESULTS

$V_{VS} = 13V$, $V_{VCC} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.


Start-Up through VIN

High-side (HS) on, $I_{OUT} = 800mA$

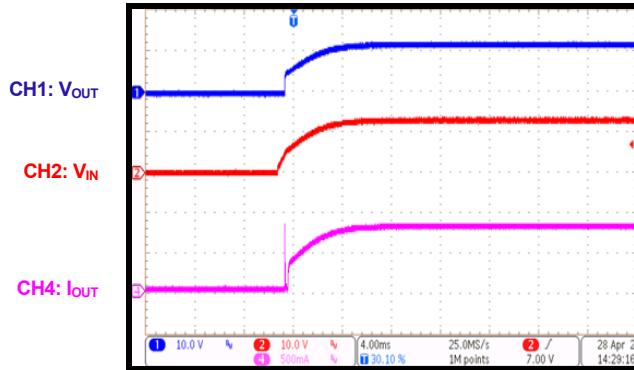


Shutdown through VIN

HS on, $I_{OUT} = 800mA$

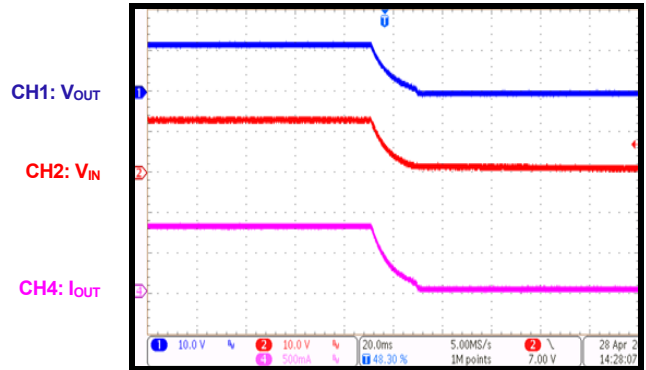


Start-Up through VIN

Low-side (LS) on, $I_{OUT} = 800mA$

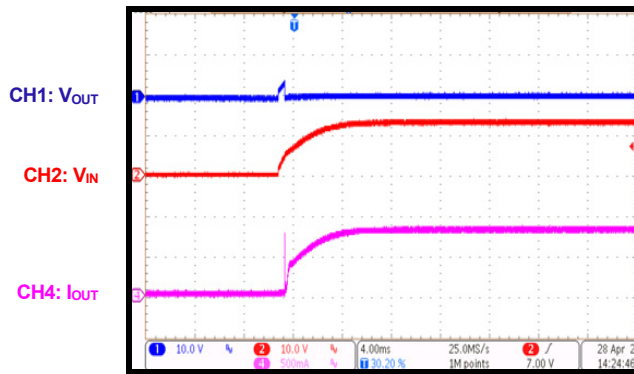


Shutdown through VIN

LS on, $I_{OUT} = 800mA$

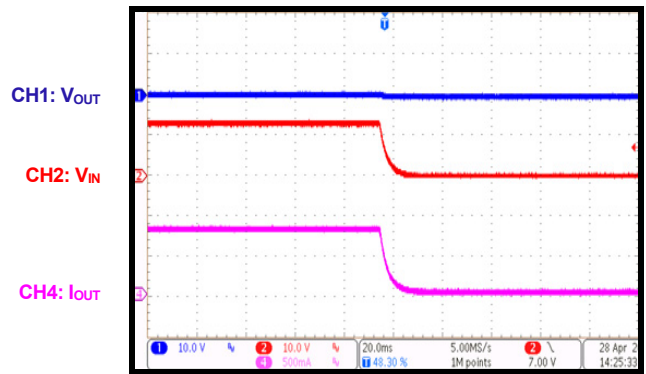


Over-Current Protection (OCP)

OUT shorted to GND

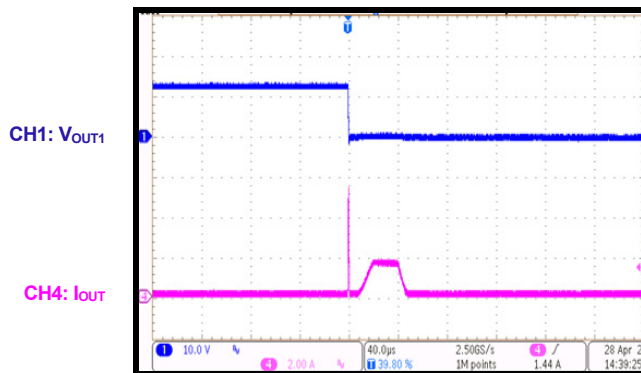


OCP

OUT shorted to VIN

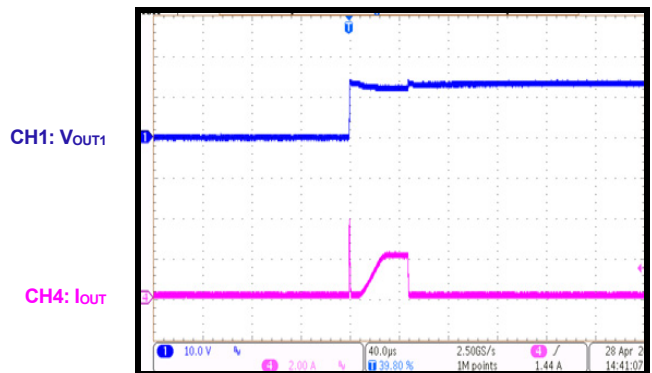

EVB TEST RESULTS (continued) $V_{VS} = 13V$, $V_{VCC} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.**OCP**

OUT shorted to OUT

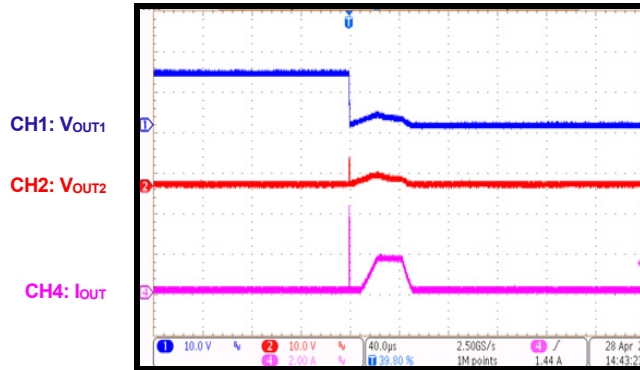

PCB LAYOUT

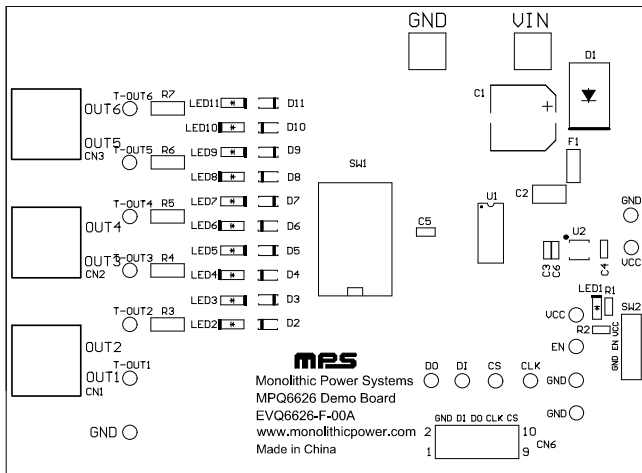


Figure 4: Top Silk

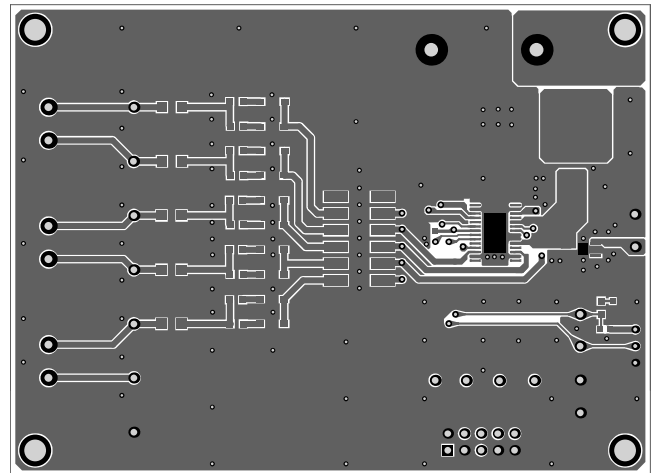


Figure 5: Top Layer

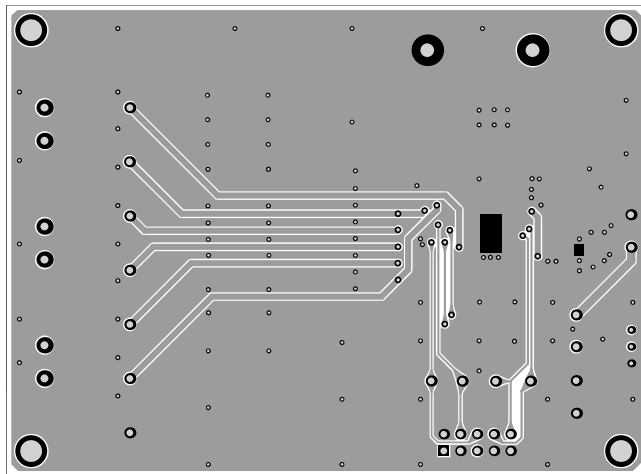


Figure 6: Bottom Layer



REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	3/8/2022	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.