


Junior Handy Little Relay 12VDC



Supply Voltage
12VDC

Coil Resistance
720Ω

Nominal Current
16mA

Output
Two Pole Change
Over relay contacts,
volt free (dry).


Rated at
2A at 240VAC
2A at 30VDC

Indicator
Red LED

Dimensions
35mm W x 33mm L x
14mm H – single
35mm W x 131mm L
x 14mm H – 4
Can be broken down
in to singles, doubles
or triples as required



Plastic mounting feet
are available – order
SFSA for a pack of 20

Circuit diagram

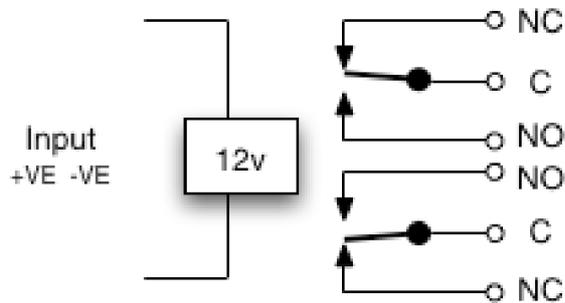

This relay is polarised and is therefore suitable for alarm bell circuits. It must be wired the correct way round for it to operate. There is also a back EMF suppressing diode.

Sample Applications

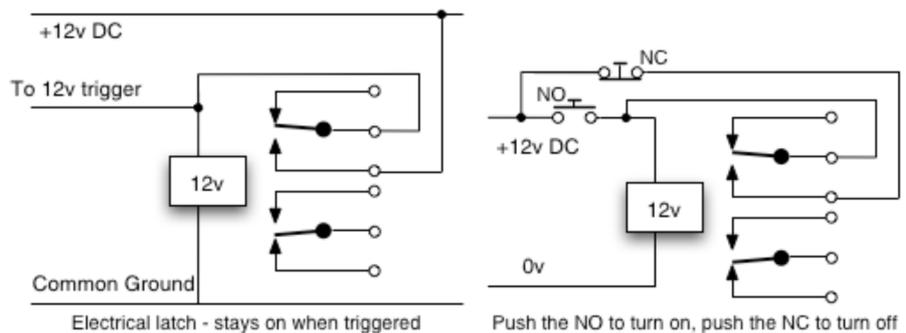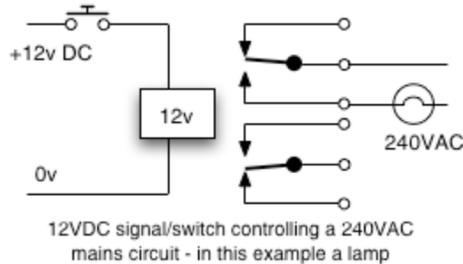

JHLR12/4

**Junior Handy
Little Relay 12VDC
Strip of 4**