

CURRENT REGULATIVE DIODE CRD


CRD is a diode which supplies constant current to an electric circuit, even when power supply voltage fluctuations or load impedance fluctuations occur.

CRD is used for current stabilization and current limiting.

Part number

102	Packing condition None : E Series, Individually packed in a bag 26Z : E Series, 26mm wide axial taping winding type 26R : E Series, 26mm wide axial taping role type 52Z : E Series, 52mm wide axial taping winding type 52R : E Series, 52mm wide axial taping role type RE : E Series, Radial taping winding type T : S Series, Taping role
	Pinch off current e.g.) : 301 \Rightarrow 30 \times 10 ⁴ μ A=0.3mA 102 \Rightarrow 10 \times 10 ⁴ μ A=1.0mA 452 \Rightarrow 45 \times 10 ⁴ μ A=4.5mA
	E : Lead wire type S : SMD type

Basic characteristics

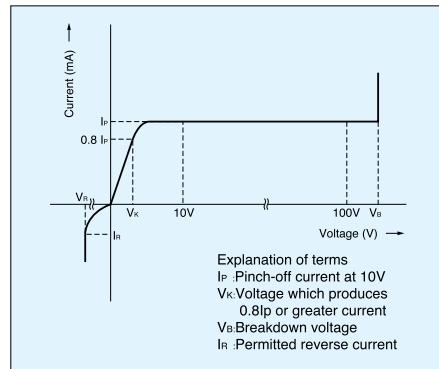


Ratings

	E series	S series
Rating power	300mW	500mW
Rated voltage	100V(E-101~E-562) 50V(E-822~E-183)	100V(S-101T~S-562T) 50V(S-822T~S-183T)
Reverse current	50mA	
Junction temp	150°C	
Operating temp	-30°C~150°C	-40°C~150°C

Maximum rating voltage

Part No.	Voltage	Part No.	Voltage
E101~E-562	100V	S-101T~S-562T	100V
E-822	30	S-822T	
E-103		S-103T	
E-123		S-123T	
E-153	25	S-153T	
E-183		S-183T	40

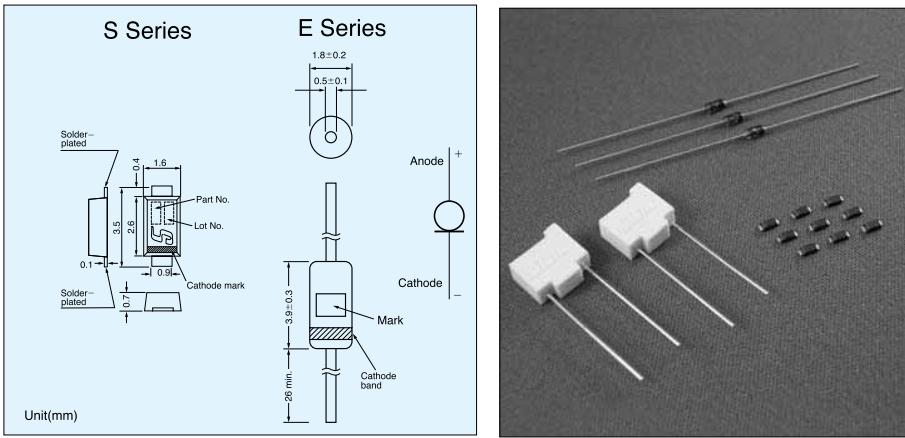

Specifications

Part No.	SMD	With Lead	Test Voltage	Pinch-off current* ¹		Limiting current* ²		Limiting current ratio $I_{100V}/I_p \cdot I_{30V}/I_p$	Temperature* ³ Coefficient (% / °C)
				Typical	Ip(mA)	min~max	V _k (V)		
S-101T	10V	E-101		0.10	0.05~0.21	0.5	0.8lpmin	1.1max	+2.10~+0.10
S-301T		E-301		0.30	0.20~0.42	0.8			+0.40~−0.20
S-501T		E-501		0.50	0.40~0.63	1.1			+0.15~−0.25
S-701T		E-701		0.70	0.60~0.92	1.4			0.00~−0.32
S-102T		E-102		1.00	0.88~1.32	1.7			−0.10~−0.37
S-152T		E-152		1.50	1.28~1.72	2.0			−0.13~−0.40
S-202T		E-202		2.00	1.68~2.32	2.3			−0.15~−0.42
S-272T		E-272		2.70	2.28~3.10	2.7			−0.18~−0.45
S-352T		E-352		3.50	3.00~4.10	3.2			−0.20~−0.47
S-452T		E-452		4.50	3.90~5.10	3.7			−0.22~−0.50
S-562T		E-562		5.60	5.00~6.50	4.5			−0.25~−0.53
S-822T		E-822		8.20	6.56~9.84	3.1			−0.25~−0.45
S-103T		E-103		10.0	8.00~12.0	3.5			−0.25~−0.45
S-123T		E-123		12.0	9.60~14.4	3.8			−0.25~−0.45
S-153T		E-153		15.0	12.0~18.0	4.3			−0.25~−0.45
S-183T		E-183		18.0	16.0~20.0	4.6			−0.25~−0.45



*1,*2 Pinch-off current limiting current are measured by impulse wave at 25°C

*3 Temperature coefficient is measured between 25°C and 50°C.

* I_{30}/I_p

Taping

There are three Types for taping.

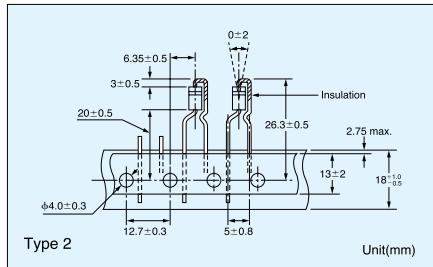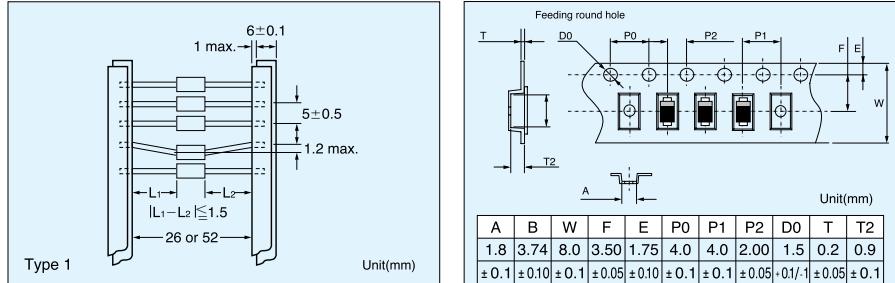

Minimum taping quantity for


Type 1 Roll.....5000pcs

Box.....2500pcs


Type 2 4000pcs

Type 3 3000pcs

Power derating

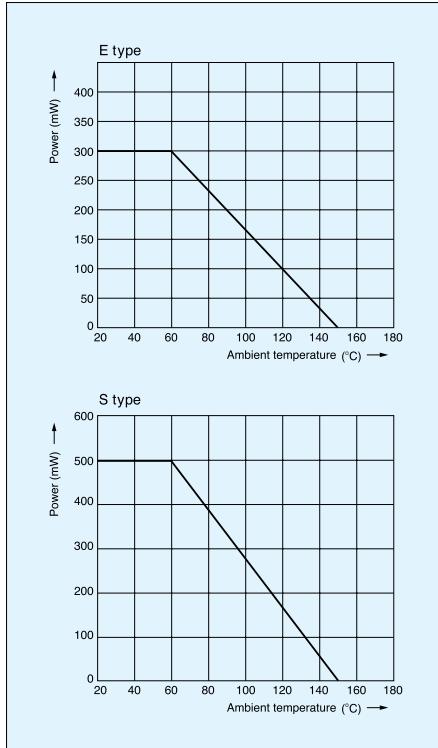


Pinch-off current Temperature

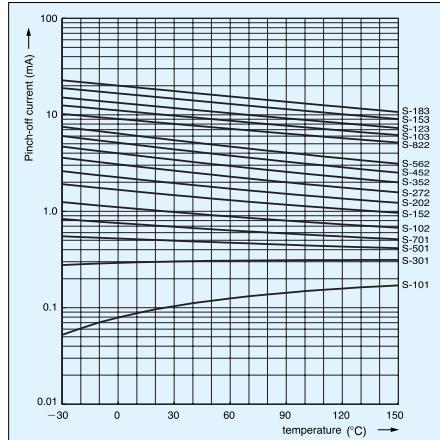


The compensation of current reduction due to self heating

Placing resistors in parallel with CRD can correct any current decrease when the applied voltage increases. The following values are typical for correction resistors.

E-102	1MΩ	E-352	82kΩ
E-152	390kΩ	E-452	56kΩ
E-202	240kΩ	E-562	39kΩ
E-272	120kΩ		



Compensative resistor is not necessary if the current value is less than 1 mA.

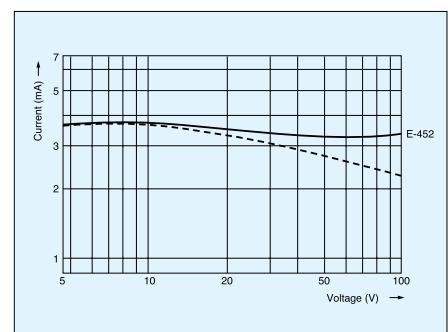

Dynamic characteristics (saturation characteristics)

