
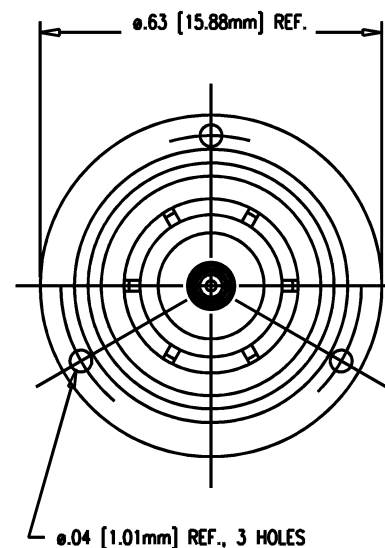


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/26-0010

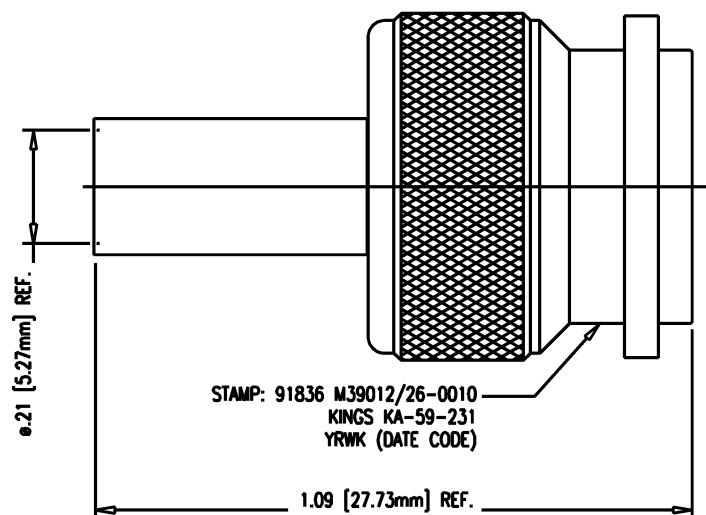

NOTES:

1. FOR USE WITH RG-58, 58A, 58C, 141, AND 141A CABLES.
2. FOR CRIMPING USE CRIMP DIE KTH-2001.
3. FOR CABLING INSTRUCTIONS SEE CP-465.
4. MATERIALS:
K-GRIP SLEEVE: COMM. BRONZE., ASTM-B135
OUTER CONTACT: BER. COP., ASTM-B-194
ALL OTHER METAL PARTS: BRASS, ASTM-B16
GASKET: SILICONE RUBBER, ZZ-R-765
INSULATOR: TEFLON, ASTM-D-4894
5. FINISHES:
CENTER CONTACT: HARD GOLD PLATE .0001 PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE .0001 MIN. PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 11 GHz
WORKING VOLTAGE: 500 VOLTS RMS

REVISIONS

ISSUE	CHANGES
0	ER 11179 WLA 05/20/74
1	CN 12970 A GA 01/11/74
2	CN 21734 C PAS 04/16/81
3	CN 32301 A LNM 06/19/90
4	CN 38728 E BDH 12/04/02

SCALE 4:1

APPROX SURFACE AREA

KA-59-231

USED ON

REF:

PLUG, TNC

DRAWN WLA	DATE 05/18/72
DESIGN LJ	DATE 05/20/72
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/26-0010

GSD