

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

744030006

Bezeichnung :

SPEICHERDROSSEL WE-TPC


description :

POWER-INDUCTOR WE-TPC



DATUM / DATE : 2009-03-06

A Mechanische Abmessungen / dimensions:

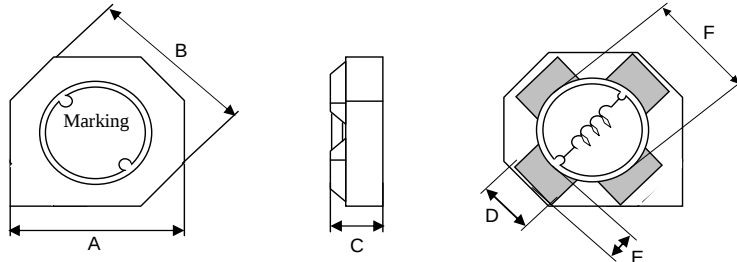

Marking
Inductance Value (μH)


A	B	C	D	E	F	G
1.2	2.2	3.3	4.7	6.8	10	22

	Typ XS	
A	3.3 ± 0.2	mm
B	3.5 ± 0.2	mm
C	0.95 ± 0.10	mm
D	1.10 typ.	mm
E	0.5 typ.	mm
F	2.3 typ.	mm
G	1.3 typ.	mm
H	4.2 typ.	mm
I	1.2 typ.	mm
J	1.8 typ.	mm

B Elektrische Eigenschaften / electrical properties:

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Induktivität inductance	100 kHz / 0.25V	L	6.80	μH	± 30%
DC-Widerstand DC-resistance	@ 20°C	R _{DC} typ	0.400	Ω	typ.
DC-Widerstand DC-resistance	@ 20°C	R _{DC} max	0.500	Ω	max.
Nennstrom rated Current	ΔT = 40 K	I _N	0.40	A	max.
Sättigungsstrom saturation current	ΔL/L = -10%	I _{sat}	0.43	A	typ.
Eigenres.-Frequenz self-res.-frequency		SRF	85	MHz	typ.

C Lötpad / soldering spec.:

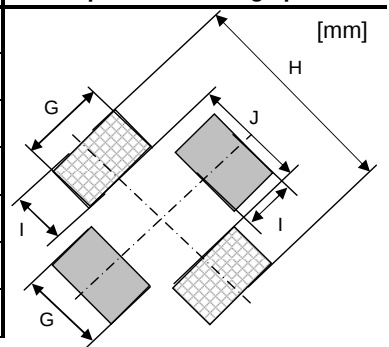

D Prüfgeräte / test equipment:

HP 4274 A für/for L und/and Q
HP 34401 A für/for I_{DC} und/and R_{DC}

E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%
Umgebungstemperatur / temperature: +20°C

F Werkstoffe & Zulassungen / material & approvals:

Basismaterial / base material: Ferrit/ ferrite
Draht / wire: Class H

G Eigenschaften / general specifications:

Betriebstemp. / operating temperature: -40°C - + 125°C
Umgebungstemp. / ambient temperature: -40°C - + 85°C
It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

Freigabe erteilt / general release:	Kunde / customer			
		SSt	Version 6	09-06-03
		MST	Version 5	08-04-11
		MST	Version 4	06-09-12
		SSt	Version 3	06-05-17
		MST	Version 2	04-10-11
		AG	Version 1	04-05-24
		Name	Änderung / modification	Datum / date

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
http://www.we-online.de

Spezifikation für Freigabe / specification for release


Kunde / customer :
 Artikelnummer / part number : 744030006
 Bezeichnung : SPEICHERDROSSEL WE-TPC
 description : POWER-INDUCTOR WE-TPC



DATUM / DATE : 2009-03-06

H Induktivitätskurve / Inductance curve:

Induktivität vs Strom (typ.)/
 Inductance vs Current (typ.)

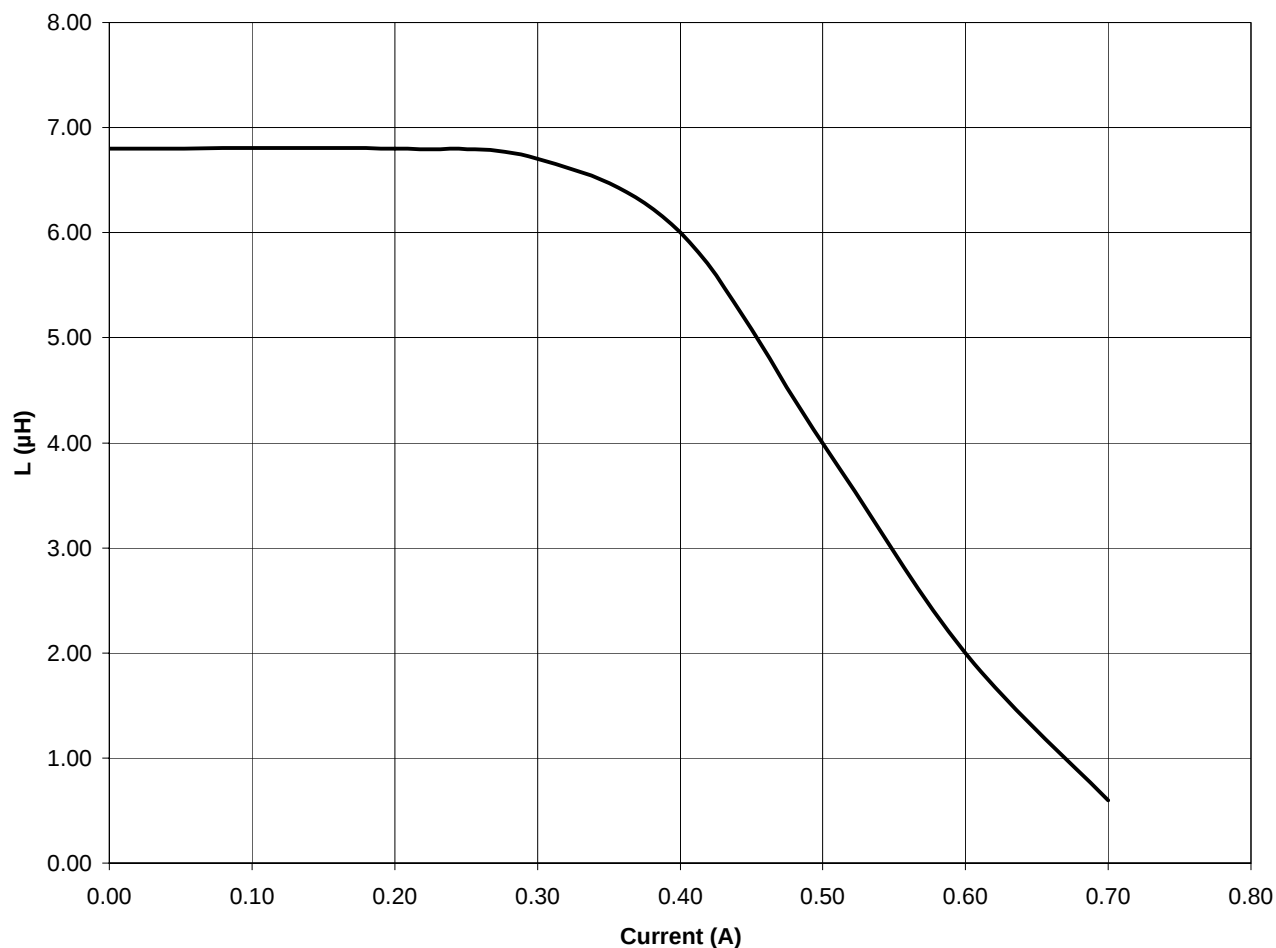

Freigabe erteilt / general release:	Kunde / customer		
.....		SSt	Version 6
		MST	Version 5
Datum / date	Unterschrift / signature	MST	Version 4
		SSt	Version 3
.....		MST	Version 2
		AG	Version 1
Geprüft / checked	Kontrolliert / approved	Name	Änderung / modification
			Datum / date

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.de>

Spezifikation für Freigabe / specification for release


Kunde / customer :
 Artikelnummer / part number : **744030006**
 Bezeichnung : **SPEICHERDROSSEL WE-TPC**
 description : **POWER-INDUCTOR WE-TPC**





DATUM / DATE : 2009-03-06

I Rollenspezifikation / tape and reel specification:

Gurtspezifikation / Tape specification:

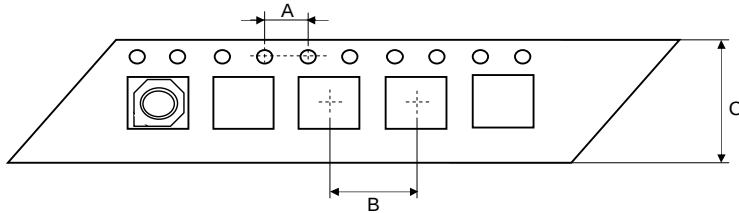

A	$4,00 \pm 0,1$	mm
B	$8,00 \pm 0,1$	mm
C	$12,0 \pm 0,2$	mm

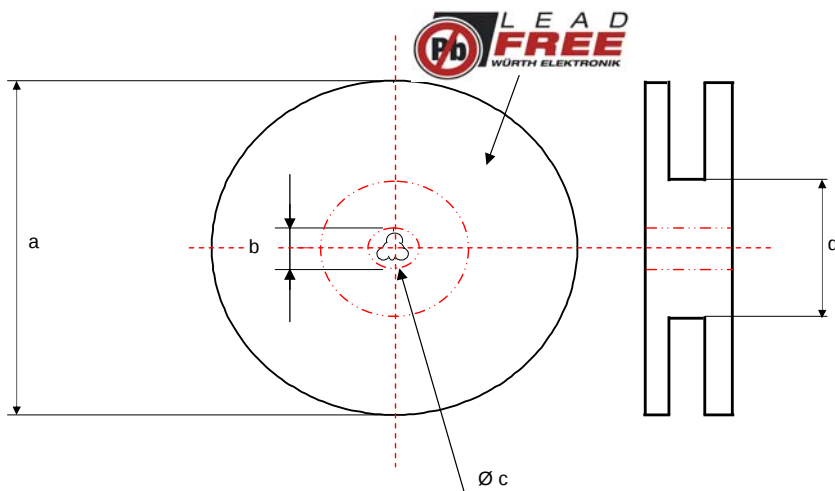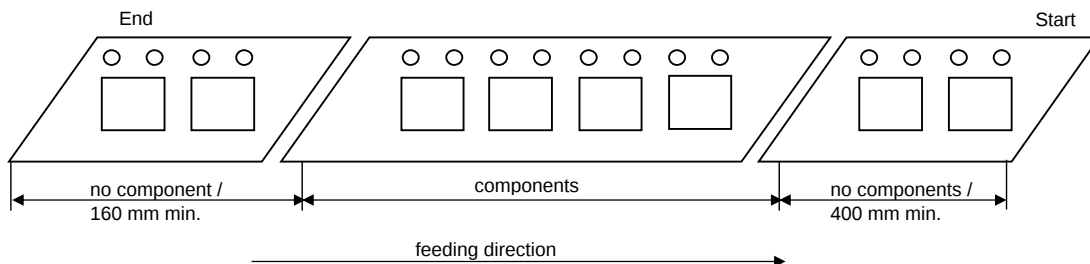

Rollenspezifikation / Reel specification:		
a	$178,0 \pm 2,0$	mm
b	$21,00 \pm 0,8$	mm
c	$13,00 \pm 0,5$	mm
d	$50,00 \pm 1,0$	mm

Freigabe erteilt / general release:		Kunde / customer	
		SSt	Version 6
		MST	Version 5
		MST	Version 4
		SSt	Version 3
Datum / date		MST	Version 2
		AG	Version 1
		Name	Änderung / modification
			Datum / date
Geprüft / checked		Unterschrift / signature	
		Würth Elektronik	
		Kontrolliert / approved	

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.de>