

Coaxial Cables

RG213AU 50 Ohm




Features:

- RG213AU cable
- Solid polyethylene dielectric covered in a plain copper braid

Product Description:

- LDPE Insulation
- Tinned copper wire braided shield 94% coverage

Cross - Section

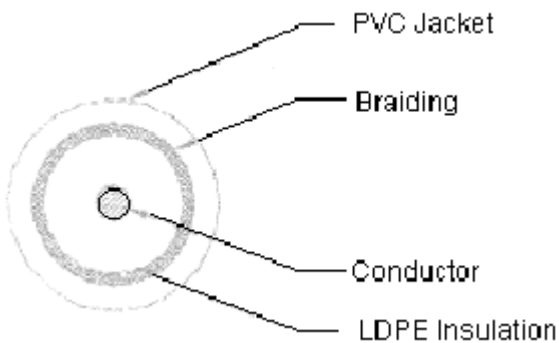

Cable Construction

Stranded Bare Annealed Copper Conductor	Construction	7 / 0.75 mm
Insulation	Stranded Diameter	2.29 mm
	Material	LDPE
	Thickness	~2.45 mm
	Insulation Diameter	7.24 ±0.18 mm
Bare Copper Wire Braiding	Construction	24 / 12 / 0.12 mm
	Coverage	94%

Specifications:

Rated Temperature	80°C	
Conductor Resistance at 20°C	5.8 Ω / km maximum	
Dielectric Strength	10 KV / minute	
Capacitance Between Conductor and Braiding	101 pF / m	
Attenuation	Frequency (MHz)	dB / 100 m
	50	4.5
	100	6.4
	200	9.5
	500	16
	800	21.2

Specification Table

Capacitance (pF)	Nominal Outside Diameter	Impedance (Ω) at 10 MHz	Reel Length (m)	Sheath Colour	Part Number
100	10.3 ±0.15	50 ±4	100	Black	CBBR0443

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.