



Current Calibrator



Features:

- Adjustable 0 to 24 mA current source
- Current calibrator drives loads up to 500 Ω
- Large LCD display
- Sampling Time : Approximately 0.4 seconds
- Over Input Indicator : 1
- Operating Temperature : 0°C to 50°C (32°F to 122°F)
- Size : 185 × 78 × 38 mm (7.3 × 3 × 1.5 inches)
- Weight : 265 g (0.58 lb) including battery
- Requires one 9 V battery - not included
- Includes cable with red and black alligator clips and instructions

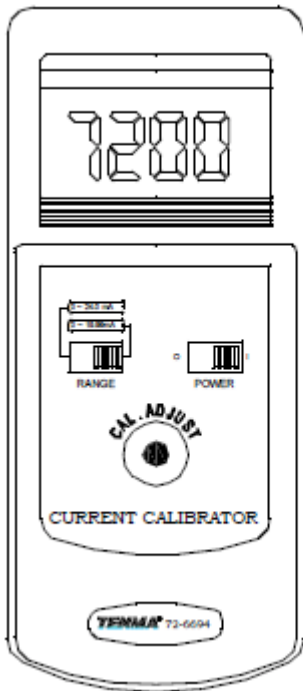

Electrical Specifications (23°C ±5°C)

Current Source

Range	Resolution	Accuracy
0 to 19.99 mA	0.01 mA	±(0.25% FS + 1 digit)
0 to 24 mA	0.1 mA	±(0.5% FS + 1 digit)

The above specification accuracy tested under the environment RF field strength of less than 3 V / M and frequency of less than 30 MHz only

Part Number Table

Description	Part Number
Calibrator, Current	72-6694

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. TENMA™ is the registered trademark of the Group. © Premier Farnell plc 2012.

