

GSD

UG-492D/U

REVISIONS

ISSUE	CHANGES
10	CN 20565 D KOR 05/12/80
JCA2482	

SCALE 4:1

APPROX SURFACE AREA

KC-96-01

USED ON


REF: MS 35177 REV. J

ADAPTER, F-F, BULKHEAD,
HERMETIC SEAL, BNC

DRAWN	JCA	DATE	01/24/92
DESIGN	MJB	DATE	01/27/92
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-492D/U

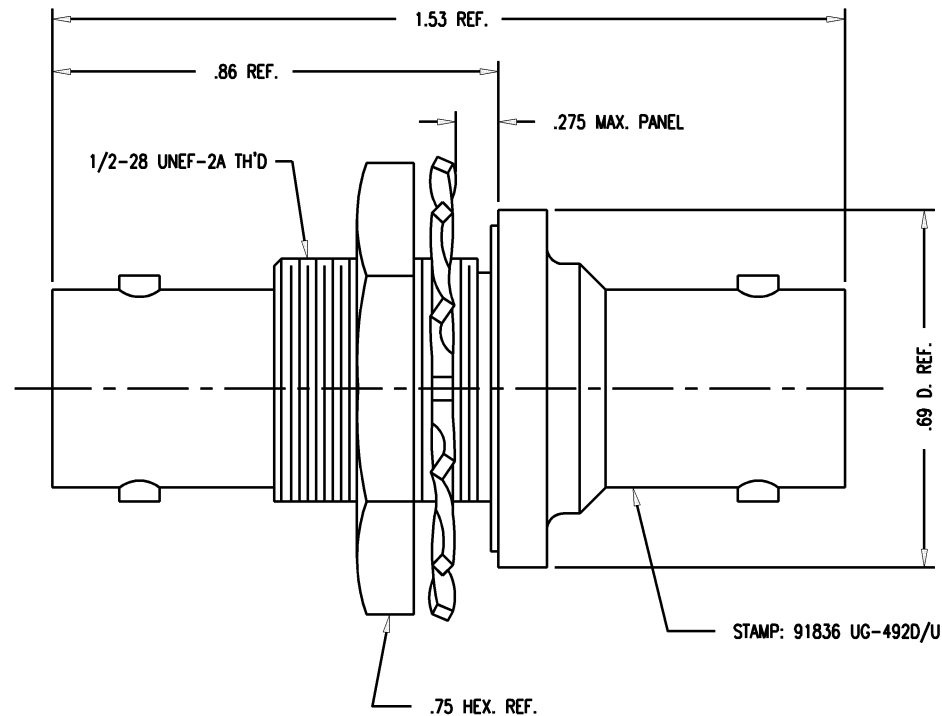

NOTES:

- INTERFACE PER MIL-STD-348, FIG. 301-2.
- MATERIALS:
INSULATORS-TEFLON, ASTM-D-1457
GASKET-SILICONE RUBBER, ZZ-R-765
CENTER CONTACTS- BER. COP., ASTM-B-196
LOCKWASHER-PHOSPHOR BRONZE, QQ-B-750
ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
ALL METAL PARTS- SILVER PLATE PER QQ-S-365
- ELECTRIAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
WORKING VOLTAGE-500 VRMS
FREQUENCY RANGE-DC TO 4 GHZ
- ENVIRONMENTAL:
UNIT WILL SHOW NO LEAKAGE AT 50 P.S.I.
LEAKAGE RATE SHALL NOT EXCEED 1×10^{-7} cc/sec OF
TRACER GAS AT ATMOSPHERIC PRESSURE.

GSD