





Specifications:

Inductance	: 330µH
Inductance Tolerance	: ± 10%
DC Resistance Max	: 1.26Ω
DC Current Rating	: 400mA
Inductor Case Style	: SMD
No. of Pins	: 2
Lead Spacing	: 3mm
Core Material	: Ferrite
External Depth	: 7mm
External Length / Height	: 5mm
External Width	: 7.8mm
Resonant Frequency	: 100kHz
Series	: MCSD75

Electrical Characteristics (at 25°C)

100kHz 0.25V	L	330µH ±10%
at 25°C	DCR	1.26Ω (Max.)
100kHz 0.25V Irms = 0.4A	ΔT	Temperature Rise 40°C (Max.)

Operating temperature: -55°C to +130°C

Material List

No.	ltem	Material Description
1	Core	R5A CDR7.8 × 5(ST) B2.9 F2.5
2	Wire	Ø0.2mm × 1P 2UEWF 155°C
3	Solder (Lead Free)	Sn99.3%/Cu0.7%


www.element14.com www.farnell.com www.newark.com



Inductor




Schematic Diagram



Note:

1. Wire Ø0.2mm × 1P 2UEWF 155°C 2. 95.5TS (Reference)

Electric Characteristics

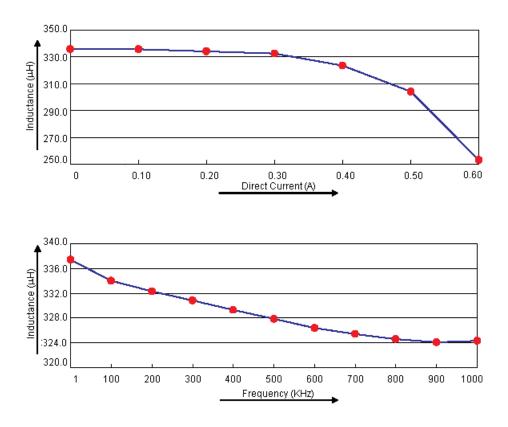


www.element14.com www.farnell.com www.newark.com






Configurations and Dimensions



Bottom View



A	7 ±0.3mm	-
В	7.8 ±0.3mm	-
С	5 ±0.5mm	-
D	3mm	(Reference)
E	8 ±0.5mm	-

Dimensions : Millimetres

Part Number Table

Description	Part Number
Inductor, 330µH, 400mA, 10%	MCSD75-331KU

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted in protein worker. This data sheet and is contents (the information) being the members of the Prefiner Partier group of comparing (the Group) of the necessary of the originate originate of the originate Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

