Terminal Block 4Way, 20A





Specifications:

Termination Method

Current Rating : 20A (300V AC)
Minimum Withstanding Insulation Voltage : 2,000V AC

 $\begin{array}{lll} \mbox{Insulation Resistance} & : > 2,000\mbox{MW (500V DC)} \\ \mbox{Operating Temperature} & : -40\mbox{°C to } +105\mbox{°C} \\ \mbox{Wire range} & : 12\mbox{AWG to } 22\mbox{AWG} \\ \end{array}$

: 12lb-inch Screw torque : Panel **Connector Mounting** Pitch Spacing : 9.5mm No. of Contacts : 4 Contact Material : Brass : Tin **Contact Plating** : Screw Terminal Type Wire Area Size Max : 3.3mm²


www.element14.com www.farnell.com www.newark.com




: Vertical

Terminal Block 4Way, 20A



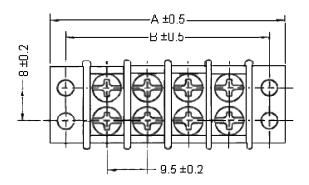

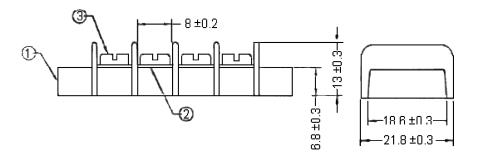

Dimensions

L	S
55.2	48

Dimensions: Millimetres

Number	Description	Material	Plating/Finish	Colour
1	Insulating Body	PC	-	Black
2	Terminal	Brass	Tin Plated	
3	Screw	Steel	Ni Plated	-

Part Number Table

Description	Part Number	
Terminal Block - 4 Way 20A	T64 4WAY	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

