


**ENERGIZER E625G**

**ZERO MERCURY**

**Miniature Alkaline**



**Industry Standard Dimensions**

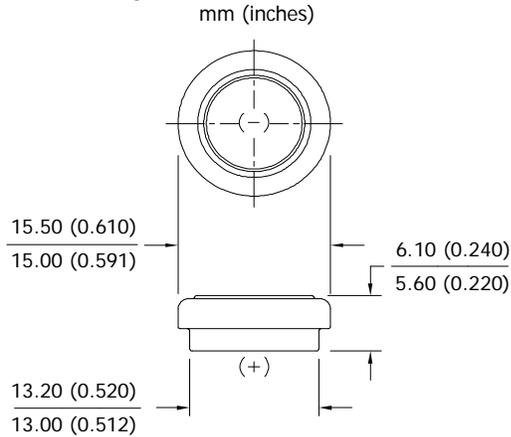


Designed specifically for photo use

**Specifications**

<b>Chemical System:</b>	Manganese Dioxide (MnO <sub>2</sub> )
<b>Designation:</b>	N/A
<b>Nominal Voltage:</b>	1.5 Volts
<b>Typical Capacity:</b>	140 mAh (to 0.9 volts) Rated at 1K ohms / 21°C (70°F)
<b>Typical Weight:</b>	3.3 grams (0.12 ounces)
<b>Typical Volume:</b>	1.2 cubic centimeters (0.07 cubic inch)


**Cross Section**

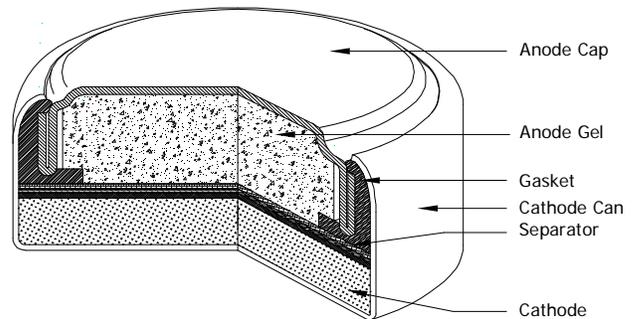

**Typical Discharge Characteristics**

21°C (70°F)

Load: 1K ohms - Continuous  
Typical Drain @ 1.25V: 1.25 mA

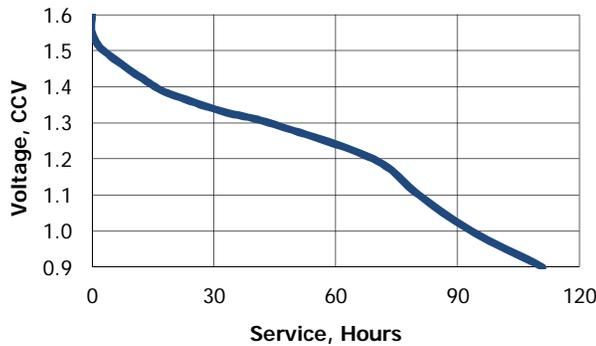

Schedule:	Typical Drains: at 1.25V (milliamperes)	Load (ohms)	Cutoff 0.9V (hours)
Continuous	1.25	1,000	112

**Important Notice**

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.