

UL TYPE CM, AWM 2464
CSA CMG FT4
300 VOLT


XTRA•GUARD® 1

MULTICONDUCTOR, SUPRASHIELD®

EXTRA-PREMIUM GRADE PVC JACKET FOR EXTENDED CABLE LIFE

CHOOSE XTRA•GUARD 1 FOR:

- Unsurpassed Flame and Moisture Resistance
- Fast, Easy Stripping of Insulation and Jacket
- UL Recognition, UL Listing and CSA Certification
- SUPRASHIELD – Twice as Effective as Foil Shielding

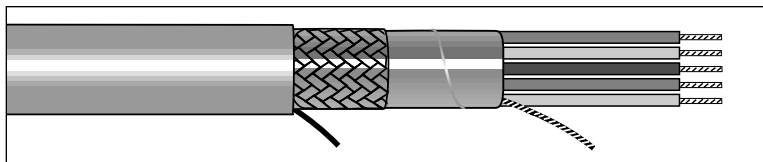

XTRA•GUARD 1 APPLICATIONS:

- High Technology Applications in Controlled Environments
- Point-Of-Sale Equipment
- Computer Peripherals
- Industrial Process Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C – AWM
- -20°C to 75°C – CM

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: Chart D Page 375
- Jacket Colors: Gray, Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- SUPRASHIELD: Aluminum/Polyester/Aluminum Foil with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable plus 70% Overall Braid of Tinned Copper
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Premium PVC

18 AWG (0,81mm²), 16/30 (16x0,25mm), Insulation Thickness: 0.017" (0,43mm)

XTRA•GUARD 1 Part No.	No. of Cond.	Jacket Thickness Inches	Jacket Thickness mm	Nominal Diameter Inches	Nominal Diameter mm
5162C, 5162/1C*	2	0.032	0,81	0.25	6,5
5163C, 5163/1C*	3	0.032	0,81	0.28	7,2
5164C	4	0.032	0,81	0.31	7,8
5166C	6	0.032	0,81	0.35	8,9
5168C	8	0.032	0,81	0.38	9,7
5170C	10	0.032	0,81	0.41	10,5
5170/15C	15	0.032	0,81	0.48	12,1
5170/20C	20	0.032	0,81	0.53	13,5
5170/25C	25	0.053	1,35	0.62	15,8
5170/30C	30	0.053	1,35	0.67	16,9
5170/40C	40	0.053	1,35	0.74	18,9


16 AWG (1,23mm²), 19/0.0117 (19x0,29mm), Insulation Thickness: 0.017" (0,43mm)

XTRA•GUARD 1 Part No.	No. of Cond.	Jacket Thickness Inches	Jacket Thickness mm	Nominal Diameter Inches	Nominal Diameter mm
5172C, 5172/1C*	2	0.032	0,81	0.28	7,2
5173C, 5173/1C*	3	0.032	0,81	0.32	8,0
5174C	4	0.032	0,81	0.34	8,8
5176C	6	0.032	0,81	0.39	10,0
5178C	8	0.032	0,81	0.43	11,0
5180C	10	0.032	0,81	0.47	11,9
5180/15C	15	0.032	0,81	0.55	13,9
5180/20C	20	0.053	1,35	0.65	16,6
5180/25C	25	0.053	1,35	0.71	18,0

*Conductors color coded per international standards: brown, blue, green/yellow

SPECIFICATIONS

- UL Type CM, AWM Style 2464
- CSA CMG FT4
- Passes UL VW-1 Flame Test
- Passes CSA FT4 Flame Test



Passes
UL VW-1 Flame Test
Underwriters Laboratories Inc.



AVAILABILITY

- In Stock: Gray 100 ft (30,5m), 500 ft (152m) and 1000 ft (305m) put-ups
- Made-To-Order: Black, 1000 ft (305m) minimum

FIT® TUBING RECOMMENDATION

FIT®-221 – General Purpose, Irradiated Polyolefin (See Page 114 for Product Specifications)

FIT®-321 – Medium Wall, Adhesive Lined, Irradiated Polyolefin (See Page 121 for Product Specifications)

FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION IN THE BACK OF THIS BOOK.

Web Site: www.alphawire.com
Email: info@alphawire.com

Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433



35