




# SMT Power Inductors—DO3316P Series

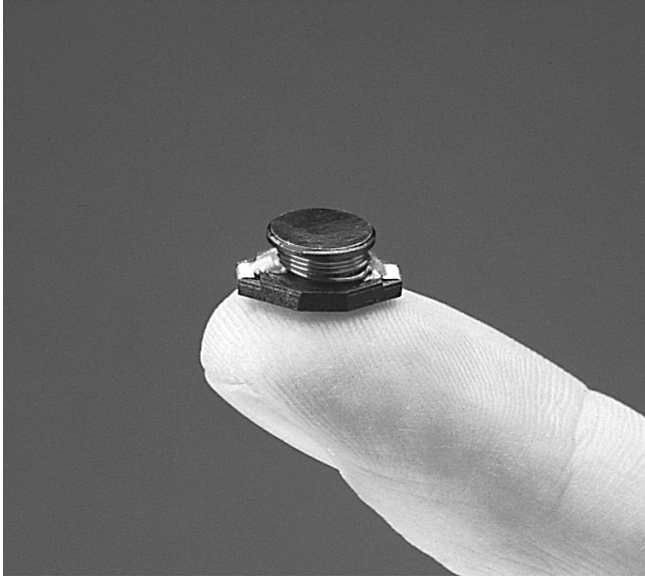

- High energy storage and very low resistance
- Most values available with 10% tolerance
- High inductance values are perfect for EL driver applications.

**Designer's Kit C378** contains 3 of each 20% part

**Core material** Ferrite

**Core and winding loss** See [www.coilcraft.com/coreloss](http://www.coilcraft.com/coreloss)

**Terminations** RoHS compliant gold over nickel over phos bronze. Other terminations available at additional cost.

**Weight** 0.92– 1.23 g

**Ambient temperature** –40°C to +85°C with Irms current, +85°C to +125°C with derated current

**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 1000 per 13" reel Plastic tape: 24 mm wide, 0.33 mm thick, 12 mm pocket spacing, 5.8 mm pocket depth

**PCB washing** Only pure water or alcohol recommended

Part number <sup>1</sup>	L <sup>2</sup> (µH)	Percent tol <sup>3</sup>	DCR max (Ohms)	SRF typ <sup>4</sup> (MHz)	Isat <sup>5</sup> (A)	Irms <sup>6</sup> (A)
DO3316P-102ML_	1.0	<b>20</b>	0.009	100	9.0	6.8
DO3316P-152ML_	1.5	<b>20</b>	0.010	90	8.0	6.4
DO3316P-222_L_	2.2	<b>20,10</b>	0.012	80	7.0	6.1
DO3316P-332_L_	3.3	<b>20,10</b>	0.015	65	6.4	5.4
DO3316P-472_L_	4.7	<b>20,10</b>	0.018	45	5.4	4.8
DO3316P-682_L_	6.8	<b>20,10</b>	0.027	38	4.6	4.4
DO3316P-103_L_	10	<b>20,10</b>	0.038	30	3.8	3.9
DO3316P-153_L_	15	<b>20,10</b>	0.046	27	3.0	3.1
DO3316P-223_L_	22	<b>20,10</b>	0.085	19	2.3	2.7
DO3316P-333_L_	33	<b>20,10</b>	0.10	15	2.0	2.1
DO3316P-473_L_	47	<b>20,10</b>	0.14	12	1.6	1.8
DO3316P-683_L_	68	<b>20,10</b>	0.20	10	1.4	1.5
DO3316P-104_L_	100	<b>20,10</b>	0.28	9	1.2	1.3
DO3316P-154_L_	150	<b>20,10</b>	0.40	6	1.0	1.0
DO3316P-224_L_	220	<b>20,10</b>	0.61	5	0.80	0.80
DO3316P-334_L_	330	<b>20,10</b>	1.02	4.5	0.60	0.60
DO3316P-474_L_	470	<b>20,10</b>	1.27	3.5	0.50	0.50
DO3316P-684_L_	680	<b>20,10</b>	2.02	2.5	0.40	0.40
DO3316P-105_L_	1000	<b>20,10</b>	3.00	2.0	0.30	0.30
DO3316P-155_L_	1500	<b>20,10</b>	4.49	1.7	0.29	0.27
DO3316P-335_L_	3300	<b>20,10</b>	8.97	1.1	0.19	0.17

1. When ordering, specify **tolerance, termination and packaging** codes:

DO3316P-105MLD

**Tolerance:** M = 20%, K = 10% (Table shows stock tolerances in bold.)

**Termination:** L = RoHS compliant gold over nickel over phos bronze. Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

**Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (1000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
  3. Tolerances in bold are stocked for immediate shipment.
  4. SRF >13 MHz measured using Agilent/HP 8753D network analyzer; <13 MHz using Agilent/HP 4192A.
  5. DC current at which inductance drops 10% (typ) from its value without current.
  6. Current that causes a 40°C temperature rise from 25°C ambient.
  7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**SPICE models** ON OUR WEB SITE



[www.coilcraft.com](http://www.coilcraft.com)

**US** +1-847-639-6400 [sales@coilcraft.com](mailto:sales@coilcraft.com)

**UK** +44-1236-730595 [sales@coilcraft-europe.com](mailto:sales@coilcraft-europe.com)

**Taiwan** +886-2-2264 3646 [sales@coilcraft.com.tw](mailto:sales@coilcraft.com.tw)

**China** +86-21-6218 8074 [sales@coilcraft.com.cn](mailto:sales@coilcraft.com.cn)

**Singapore** + 65-6484 8412 [sales@coilcraft.com.sg](mailto:sales@coilcraft.com.sg)

Document 179-1 Revised 09/25/12


© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.




# SMT Power Inductors – DO3316P Series




## Typical L vs Frequency

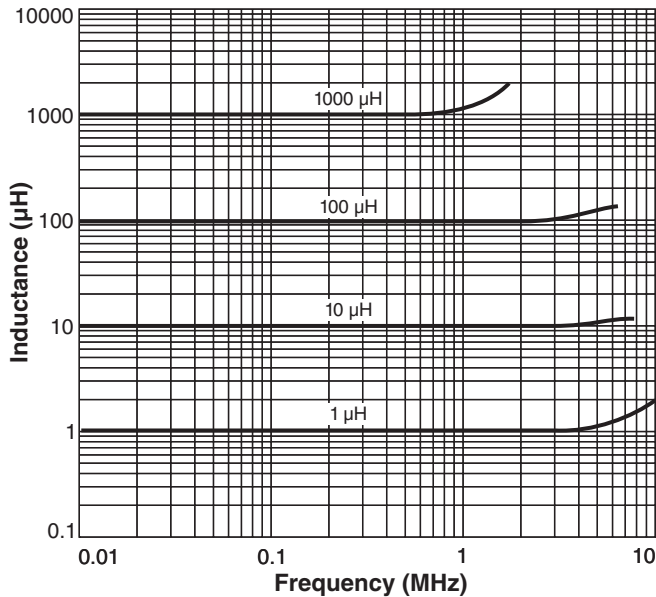

## Typical L vs Current

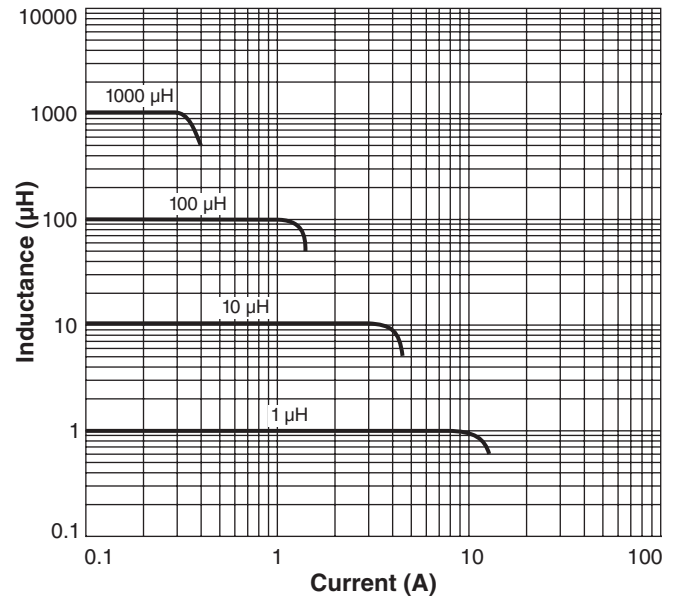

## Current Derating

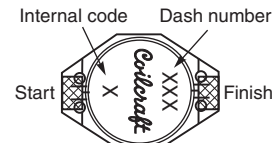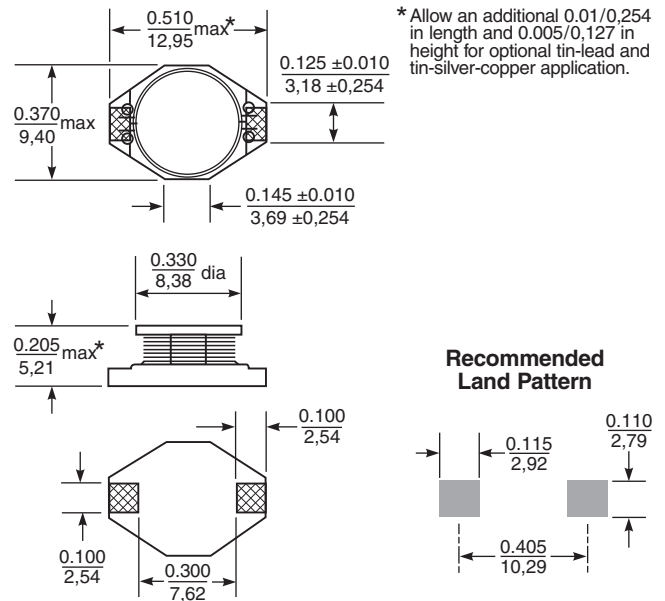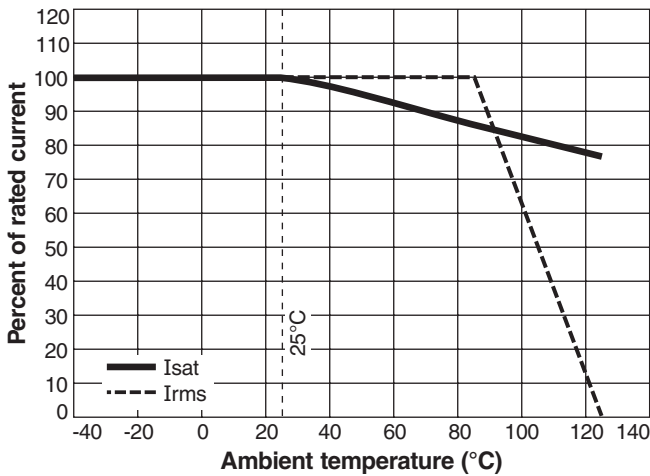

Part marking since Feb. 2005. Parts manufactured prior to that date may have color dots. Visit [www.coilcraft.com/colpowr.cfm](http://www.coilcraft.com/colpowr.cfm) for color dot marking details.

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 179-2 Revised 09/25/12

© Coilcraft Inc. 2012  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.