



GSD

M39012/01-0503

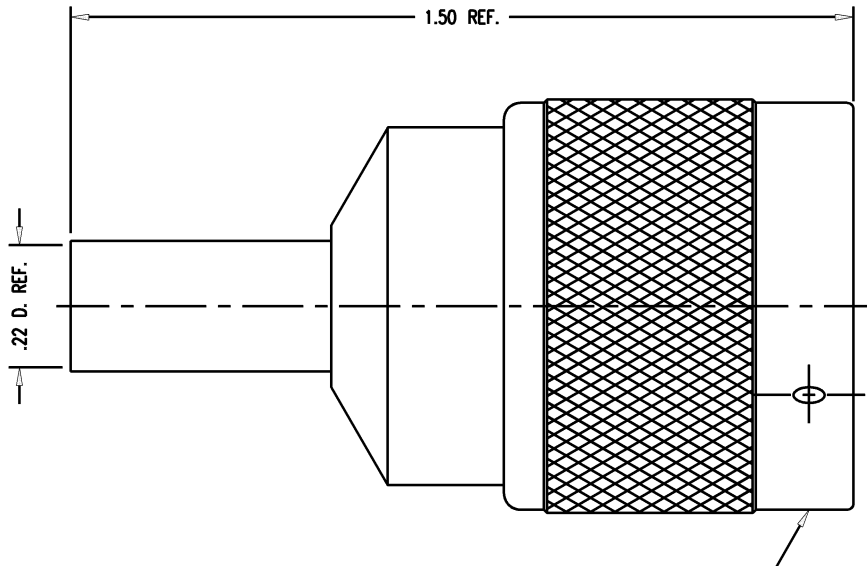

STAMP: 91836 M39012/01-0503
KN-59-242 XXXX DATE CODE)

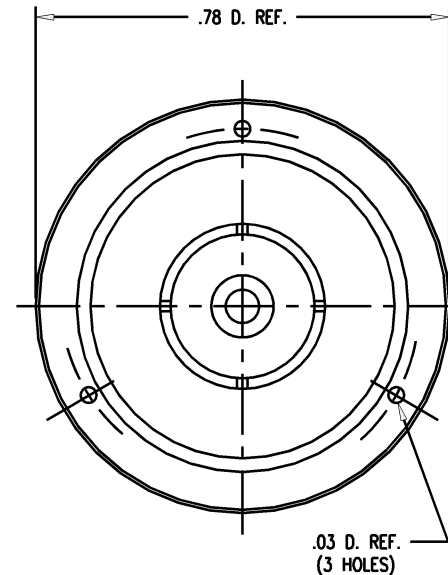

.03 D. REF.
(3 HOLES)

NOTES:

1. FOR USE WITH RG-142, 223 AND 400/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-489.
3. FOR CRIMPING USE DIE KTH-2042.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SIL. RUBBER, ZZ-R-765
OUTER CONTACT AND C-RING: PHOS. BRONZE, ASTM-B-103
ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 Ω
FREQUENCY RANGE: DC TO 11 GHz
VOLTAGE RATING: 1000 VOLTS RMS

GSD

REVISIONS

ISSUE	CHANGES
10	CN 36416 E REDRAWN ME 10/20/95

KN-59-242 QGS0934

SCALE : 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, N, M

DRAWN	ME	DATE	10/20/95
DESIGN	MJB	DATE	10/20/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/01-0503