



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939


BAW56DW

Features

- Fast switching speed
- Ultra-Small surface mount package
- For general purpose switching applications
- High conductance

Mechanical Data

- Case Material: Molded Plastic.
UL Flammability Classification Rating 94V-0
- Marking Code: KJC



Maximum Ratings

Symbol	Rating	Rating	Unit
V_{RM}	Non-Repetitive Peak Reverse Voltage	100	V
V_{RRM}	Peak Repetitive Reverse Voltage	75	V
V_{RWM}	Working Peak Reverse Voltage		
V_R	DC Blocking Voltage		
$V_{R(RMS)}$	RMS Reverse Voltage	53	V
I_{FM}	Forward Continuous Current	300	mA
I_O	Average Rectified Output Current	150	mA
I_{FSM}	Non-Repetitive Peak Forward Surge Current @ $t=1.0\mu s$ @ $t=1.0s$	2.0 1.0	A
P_D	Power Dissipation	200	mW
R_{JA}	Thermal Resistance Junction to Ambient Air	625	$^{\circ}C/W$
T_J	Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$


Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)R}$	Reverse Breakdown Voltage ($I_R=2.5\mu A$)	75	---	---	V
V_F	Forward Voltage ⁽¹⁾ $I_F=1.0mA$ $I_F=10mA$ $I_F=50mA$ $I_F=150mA$	---	---	0.715 0.855 1.0 1.25	V
I_R	Leakage Current ⁽¹⁾ ($V_R=75Vdc$) ($V_R=75Vdc$, $T_J=150^{\circ}C$) ($V_R=25Vdc$, $T_J=150^{\circ}C$) ($V_R=20Vdc$)	---	---	2.5 50 30 25	μA μA μA nA
C_j	Junction Capacitance ($V_R=0$, $f=1.0MHz$)	---	---	2.0	pF
t_{rr}	Reverse Recovery Time ($I_F=10mA$, $I_R=10mA$, $I_{rr}=0.1 \times I_R$ $R_L=100\Omega$)	---	---	4.0	ns

*⁽¹⁾ Short duration test pulse to minimize self-heating effect.





200mW Switching Diodes 75 Volts

SOT-363

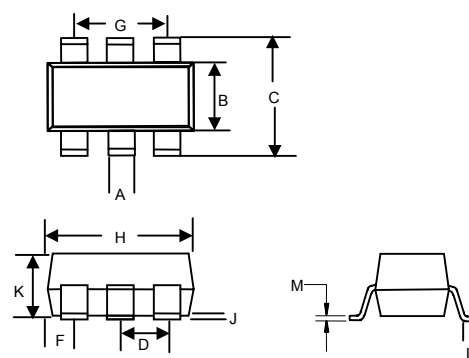

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	

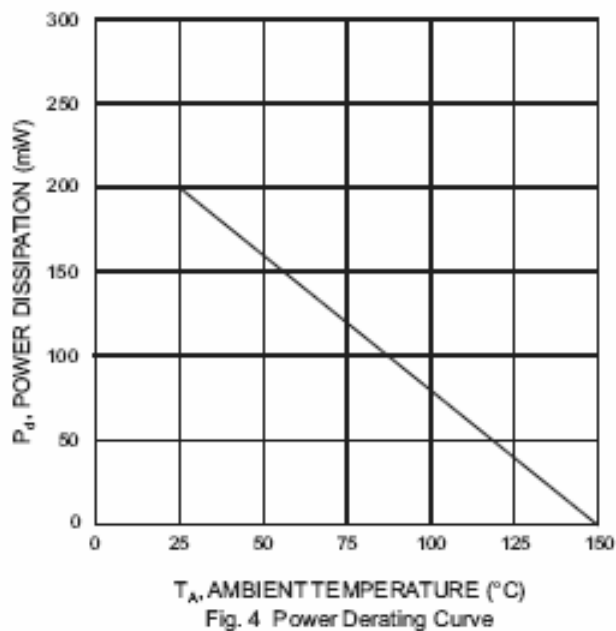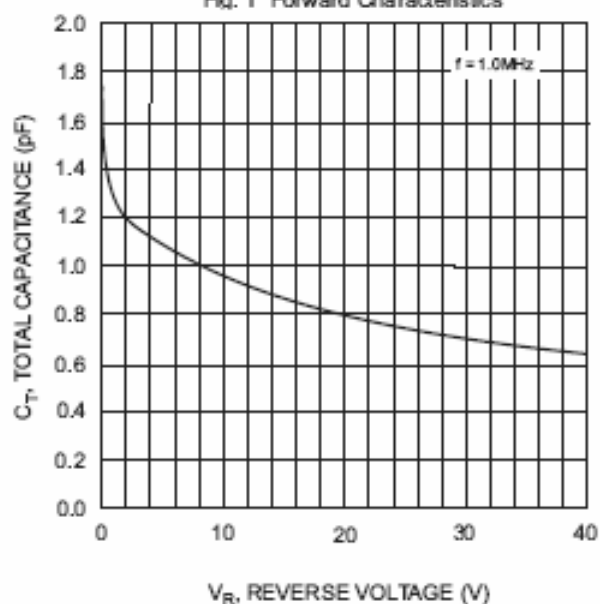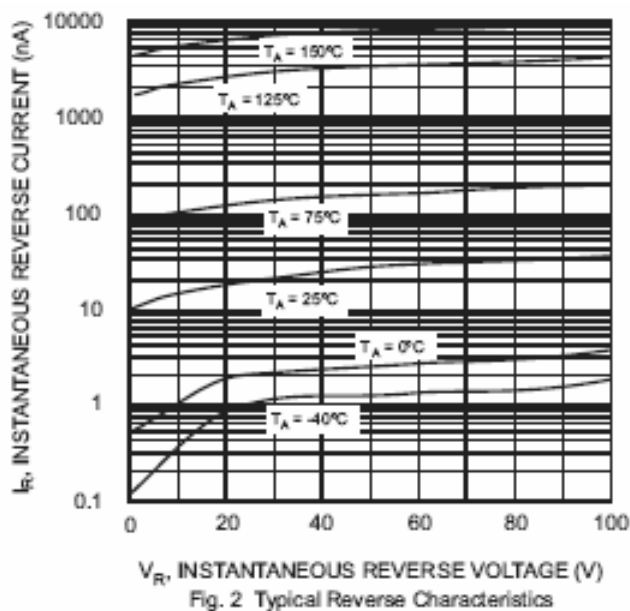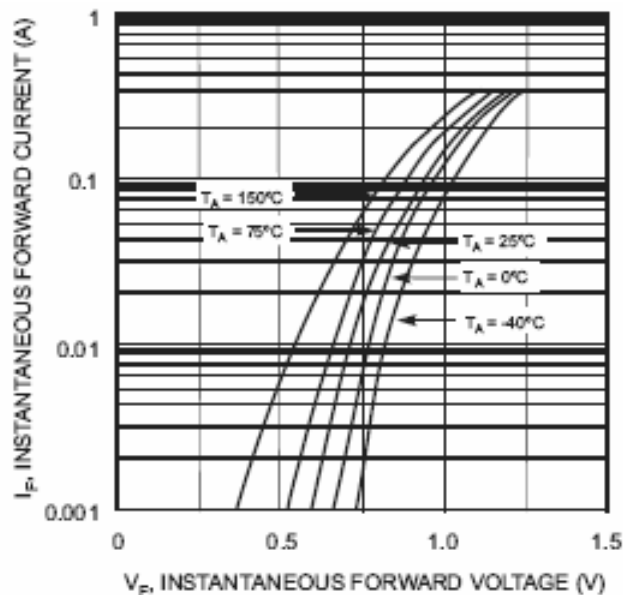

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.