



## Features:

- Plastic package
- Exceeds environmental standards of MIL-STD-19500
- 600W surge capability at  $10 \times 1000\mu\text{s}$  waveform, duty cycle: 0.01%
- Excellent clamping capability
- Low zener impedance
- Fast response time: typically less than 1ps from 0 volts to VBR for unidirectional and 5ns for bidirectional
- Typical IR less than  $1\mu\text{A}$  above 10V
- High temperature soldering guaranteed:  $260^\circ\text{C}/10$  seconds/ $0.375$  Inch (9.5mm) lead length/5lbs. (2.3kg) tension

## Mechanical Data

Case	: Molded Plastic
Lead	: Axial Leads, Solderable Per MIL-STD-202, Method 208
Polarity	: Colour Band Denotes Cathode Except Bipolar
Weight	: 0.34 Gram

## Maximum Ratings and Electrical Characteristics ( $T_A = 25^\circ\text{C}$ )

Type Number	Symbol	Value	Units
Peak Pulse Power Dissipation at $T_A = 25^\circ\text{C}$ , $T_p = 1\text{ms}$ (Note)	$P_{PP}$	Min.600	W
Steady State Power Dissipation at $T_L = 75^\circ\text{C}$ Lead Lengths 0.375" 9.5mm	P	1.7	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	100	A
Junction to Leads	$R_{\theta JL}$	60	$^\circ\text{C}/\text{W}$
Junction to Ambient on Printed Circuit. L Lead = 10mm	R	100	
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to + 175	$^\circ\text{C}$



Notes: For a surge greater than the maximum values, the diode will fall in short-circuit.




## Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Device	I <sub>RM</sub> at V <sub>RM</sub>		V <sub>BR</sub> at I <sub>R</sub>				V <sub>CL</sub> at I <sub>PP</sub>		V <sub>CL</sub> at I <sub>PP</sub>		αT	C	
	Max.		Note1				Max.	Max.	Max.	Typical			
			Min.	Nom.	Max.		10/1,000μs	8/20μS	Note2	Note3			
Unidirectional	Bidirectional	μA	V	V	V	V	mA	V	A	V	A	10 <sup>-4</sup> /°C	(pF)
-	BZW06-102B	1	102	114	120	126	1	165	3.6	212	19	10.7	450
BZW06-13	BZW06-13B	5	12.8	14.3	15	15.8		21.2	28	27.2	147	8.4	1,900
BZW06-15	BZW06-15B	1	15.3	17.1	18	18.9		25.2	24	32.5	123	8.8	1,600
BZW06-20	BZW06-20B		20.5	22.8	24	25.2		33.2	28	42.8	93	9.4	1,250
BZW06-31	BZW06-31B		30.8	34.2	36	37.8		49.9	12	64.3	62	9.6	950
BZW06-33	BZW06-33B		33.3	37.1	39	41		53.9	11.1	69.7	57	10.0	900


- Notes: 1. Pulse test: t<sub>p</sub> < 50ms.  
 2.  $\Delta V_{BR} = \alpha T \times (T_A - 25) \times V_{BR}(25^\circ C)$ .  
 3. V<sub>R</sub> = 0V, F = 1MHz, For bidirectional types, capacitance value is divided by 2.

## Ratings and Characteristic Curves

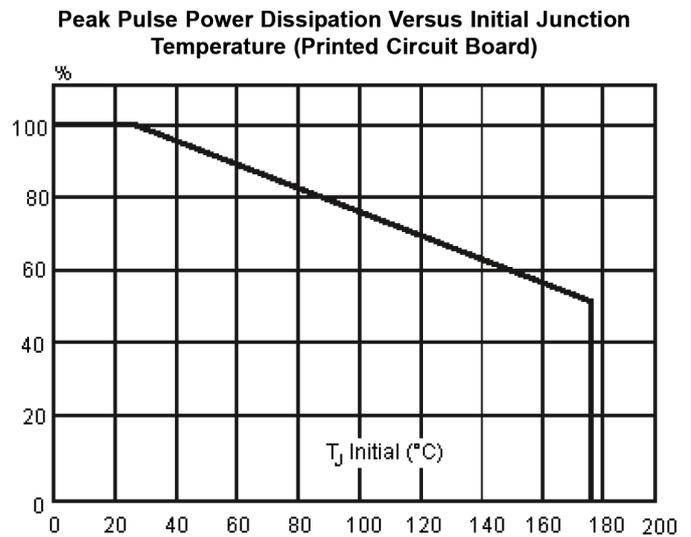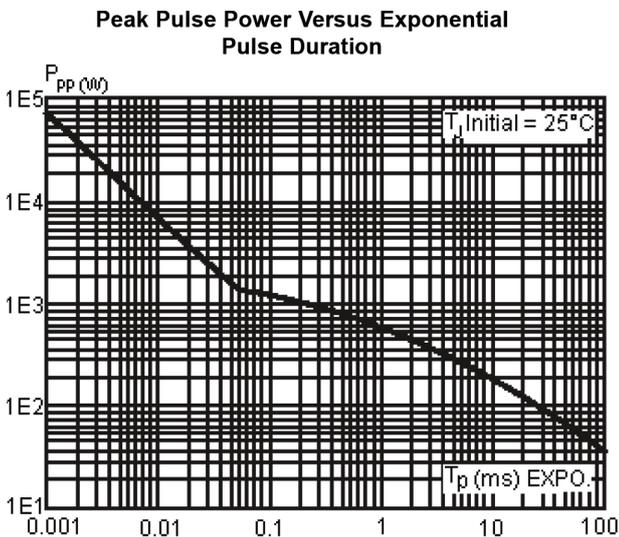


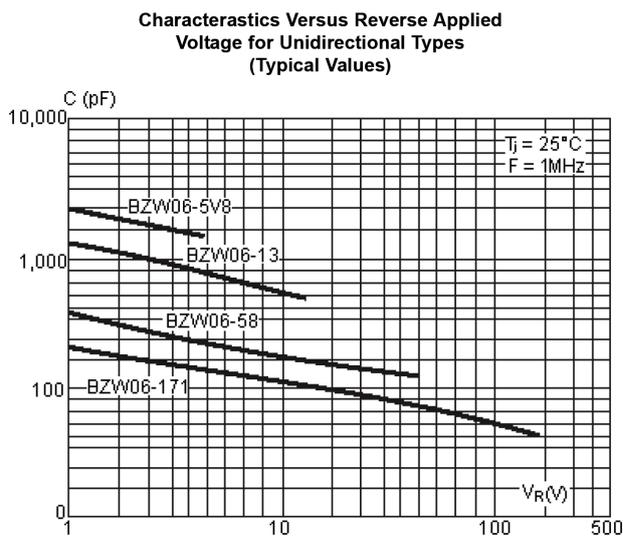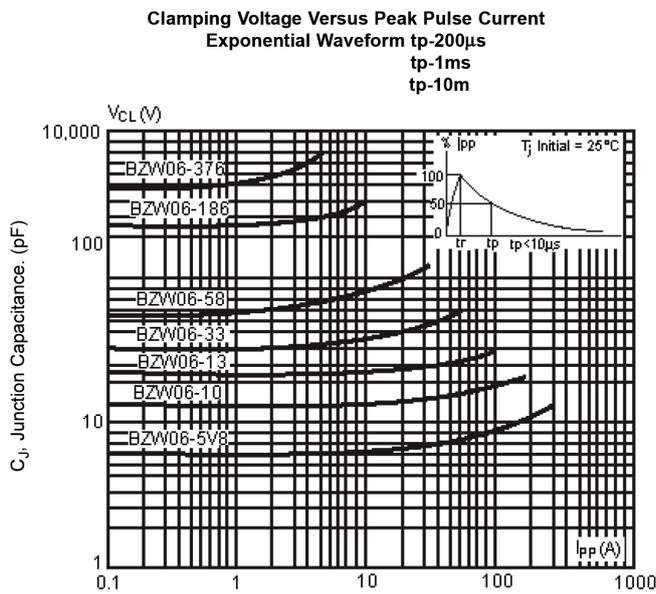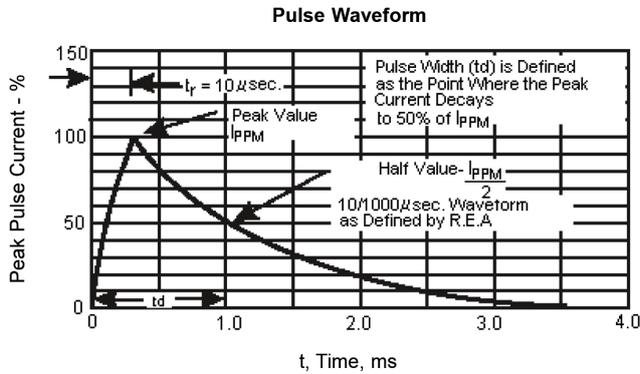


**Characteristics Versus Reverse Applied Voltage for Unidirectional Types (Typical Values)**

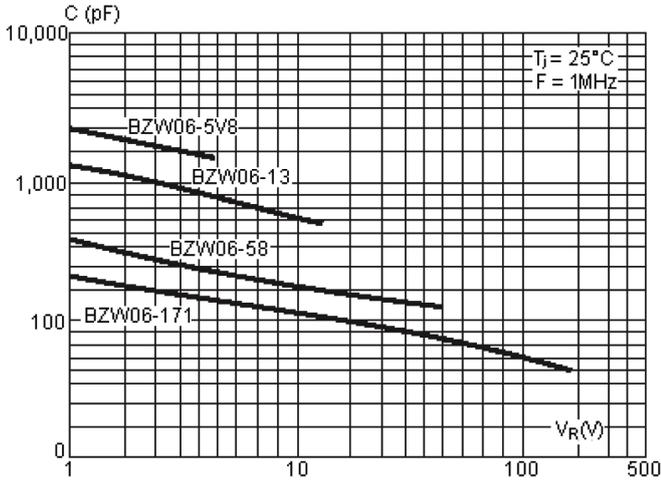


**Peak Forward Voltage Drop Versus Peak Forward Current (Typical Values for Unidirectional Types)**

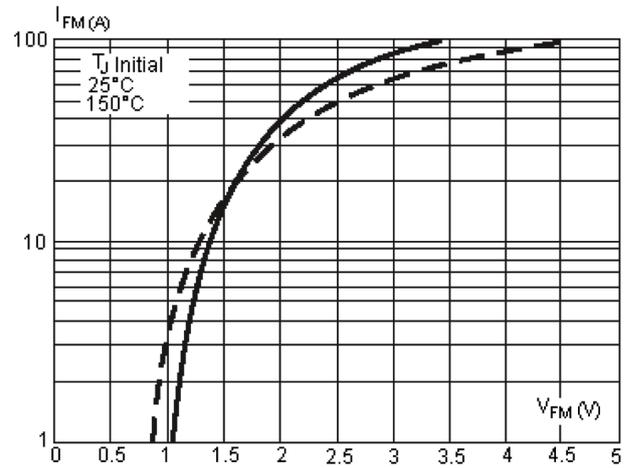


**Transient Thermal Impedance Junction Ambient Versus Pulse Duration (For FR4 PC Board With L Lead = 10mm)**

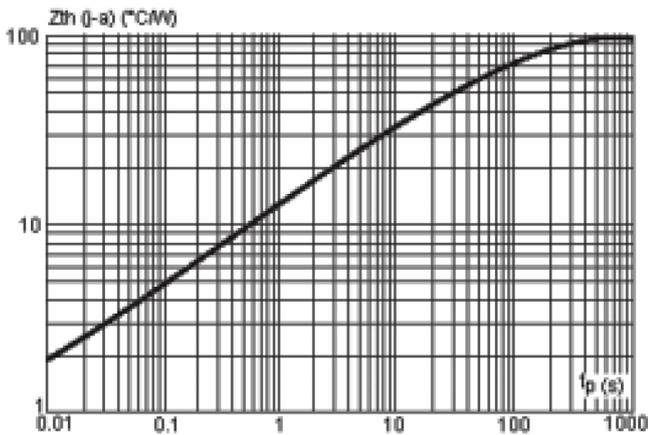

**Relative Variation of Leakage Current Versus Junction Temperature**

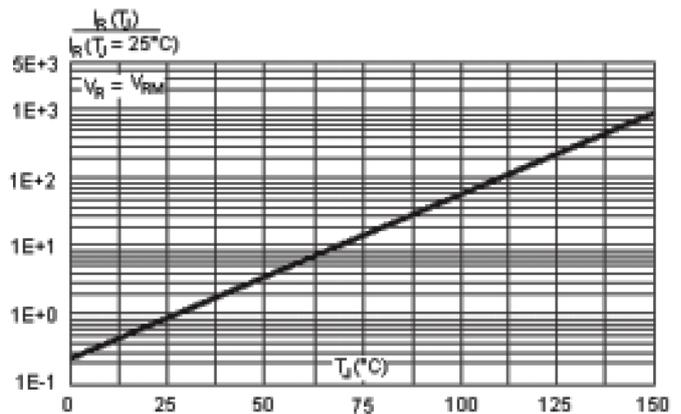

# TVS Diode

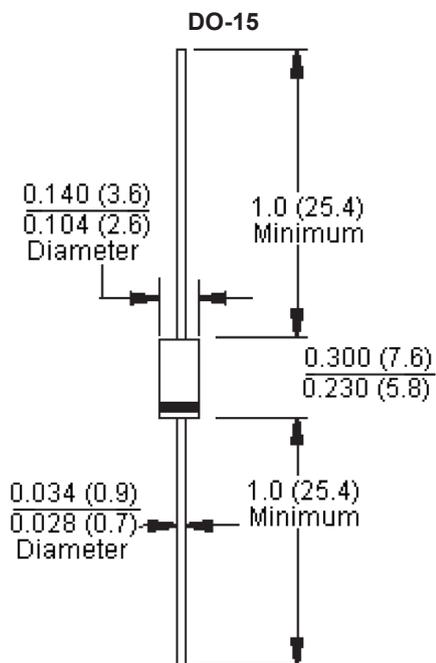

Dimensions : Inches (Millimetres)

## Part Number Table

Description	Part number
Diode, TVS, 13V, 600W	BZW06-13
Diode, TVS, 13V, 600W	BZW06-13B
Diode, TVS, 15V, 600W	BZW06-15
Diode, TVS, 15V, 600W	BZW06-15B
Diode, TVS, 20V, 600W	BZW06-20
Diode, TVS, 20V, 600W	BZW06-20B
DIODE, TVS, 31V, 600W	BZW06-31
Diode, TVS, 31V, 600W	BZW06-31B
Diode, TVS, 33V, 600W	BZW06-33
Diode, TVS, 33V, 600W	BZW06-33B

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com  
www.farnell.com  
www.newark.com

