BNC Jack Crimp





Specifications:

Connector Type : BNC Coaxial
Body Style : Straight Jack
Coaxiel Tormination

Contact Material : Beryllium Copper

Contact Plating : Silver Frequency Max : 11GHz **Connector Mounting** : Cable Cable Diameter Max : 5mm **Contact Material** : Brass Contact Resistance : 1.5mΩ DC Current Max : 1A Insulator Material : PTFE

Material : Brass with Silicone Gasket

Operating Temperature : -65°C to +165°C


Proof Voltage : 2kV
Termination Method : Crimp
VSWR : 1.35
Working Voltage : 500V





BNC Jack Crimp



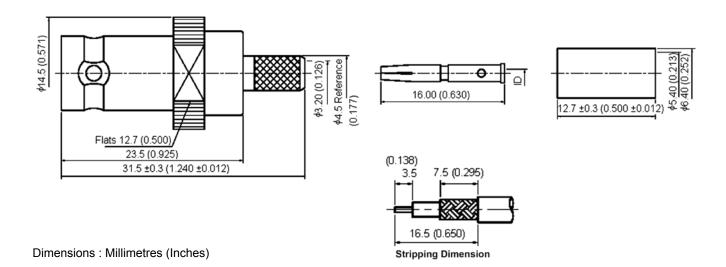

Number	Description	Material	Finish	
1	Crimp Ferrule	Brass	Silver 70µ" Min.	
2	Centre Contact	Beryllium Copper		
3	Insulation	PTFE	None	
4	Body	Droop	Silver 70µ" Min.	
5	Chassis	Brass		

Part Number Table

Description	Part Number	
Jack BNC, Crimp, 50R	13-15-1 TSS RG58U	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

