
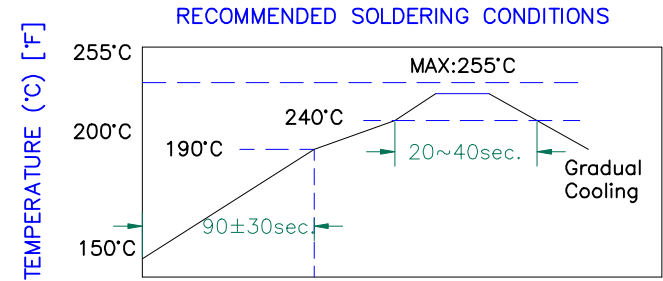




# TYS3010220M-10

## PHYSICAL DIMENSIONS:

A	3.00	±	0.20
B	3.00	±	0.20
C	1.00		MAX.
D	0.75	±	0.20
E	1.50	±	0.20

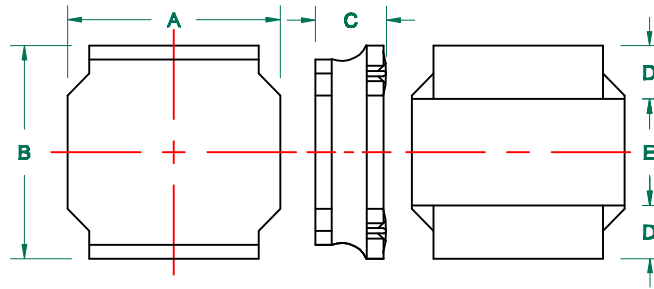

## LAND PATTERNS FOR REFLOW SOLDERING




## ELECTRICAL SPECIFICATION


	Min	Nom	Max
INDUCTANCE (uH) L @ 100 KHz/1V ± 20%	17.60	22.00	26.40
DCR (Ω)		0.930	1.209

Saturation Current(A)	0.35
SRF (MHz)	28
Temperature Rise Current (A)	0.38

## CHARACTERISTICS OF TEMPERATURE RISE

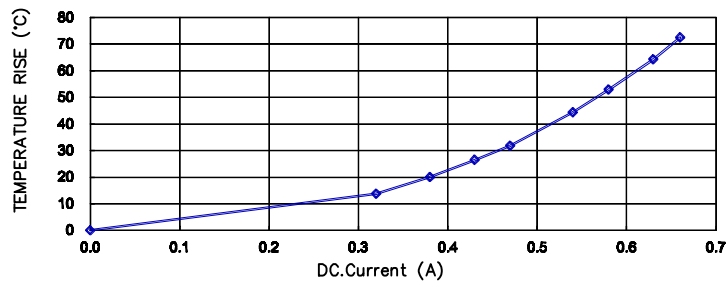

## CURRENT VS INDUCTANCE DROP IN RATES

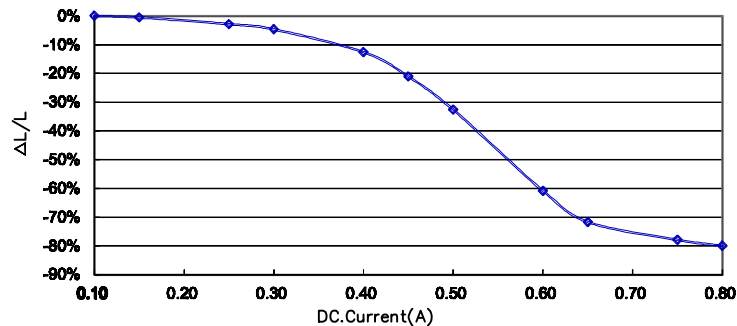

**UNCONTROLLED DOCUMENT**

NOTES: UNLESS OTHERWISE SPECIFIED

- OPERATING TEMPERATURE RANGE: -25°C TO +125°C (INCLUDING SELF-HEATING) .
- STORAGE TEMPERATURE RANGE (PACKAGING CONDITIONS): -10°C TO +40°C AND RH 70% (MAX.)
- UNLESS OTHERWISE SPECIFIED, THE STANDARD ATMOSPHERIC CONDITIONS FOR MEASUREMENT/TEST AS:
  - A. AMBIENT TEMPERATURE: 20±15°C.
  - B. RELATIVE HUMIDITY: 65%±20%.
- SATURATION CURRENT (ISAT): DEFINITION OF SATURATION CURRENT (ISAT): DC CURRENT AT WHICH THE INDUCTANCE DROPS APPROXIMATE 30% FROM ITS VALUE WITHOUT CURRENT.
- TEMPERATURE RISE CURRENT (IRMS): DEFINITION OF TEMPERATURE RISE CURRENT: DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 20°C AMBIENT.

DIMENSIONS ARE IN mm .				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.					
				PROJECT/PART NUMBER: <b>TYS3010220M-10</b>					
				REV <b>B</b>		PART TYPE: <b>POWER INDUCTOR</b>		DRAWN BY: <b>QIU</b>	
				DATE: <b>11/22/11</b>		SCALE: <b>NTS</b>		SHEET: <b>2 of 2</b>	
				DATE: <b>11/22/11</b>		CAD #		TOOL # <b>-</b>	
				DATE: <b>11/22/11</b>		INT		TYS3010220M-10-B	
				DATE: <b>11/22/11</b>		INT		TYS3010220M-10-B	
				DATE: <b>11/22/11</b>		INT		TYS3010220M-10-B	
				DATE: <b>11/22/11</b>		INT		TYS3010220M-10-B	