LS809-31

horizontal Level Sensor



LS Series


- High or low level sensing
- N/O or N/C by rotating through 180°
- Suitable for a wide range of liquids
- Interface option available
- G/F Polypropylene Material

√RoHS

The LS809-31

From our range of horizontal liquid level sensors which offer design engineers reed switch reliability. The design allows for sensing high or low liquid levels from the side of the tank.

.....

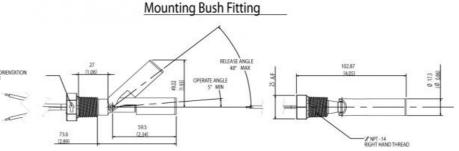

dimensions

FEATURES

- High or low level sensing
- External fitting
- · Reed Switch reliability
- · Easy installation

APPLICATIONS

- Continuous 80°C in water
- · Water high or low level
- · Condensate level alarm
- · Drinking water level
- · Cooling systems

Tel: +44 1465 716999



LS809-31

horizontal Level Sensor

performance specifications

Material, Design and Operation

Mounting Horizontal

Housing Material Glass Filled Polypropylene

Housing Colour Charcoal

Float Material Glass Filled Polypropylene

Float Colour Charcoal
Contact Form A
Contact Material Ruthenium
Maximum Switching Volts (VAC) 250
Maximum Switching Volts (VDC) 200
Maximum Switching Current (Amp) 1
Maximum Power (Watt) 70

Connection Type Stripped Cables

Cable Type 18AWG, 32/0.2mm PVC insulated Cable Length 2 x 0.5M single insulated

Cable Colour

Minimum Specific Gravity

O.65

Operate Temperature Range

Medium/Liquid

Sealing Component

Mounting Shock

Black/Black

0.65

-30° to +105°C

Water

Not Supplied

50g for 11mS duration

Operate Mode N/C with float horizontal

IP Rating IP65

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights of others.

ordering info

The LS809-31 is from our LS Series of horizontal Level Sensors.

The Series is available in alternative with a number of standard options including:

- · Housing and float materials
- · Reed Switch configurations
- · Maximum load switching abilities
- · Installation Methods
- · Sealing materials
- · Cable types
- · Cable lengths

Please see the LS Series part number tree.

Tel: +44 1465 716999