# 350mW Surface Mount Zener Diode





#### Features:

- · Planar Die Construction
- · 350mW Power Dissipation
- Zener Voltages from 2.4V to 51V
- · Ideally Suited For Automated Assembly Processes

# Tolerance: C = 5% 3 2 SOT-23 CONNECTION DIAGRAM 1 2 NC

## **Applications:**

350mW Surface mount zener diode

### Max. Rating @ TA = 25°C unless otherwise specified

| Param                                      | Symbol      | Limits               | Unit        |      |
|--|-------------|----------------------|-------------|------|
| Forward voltage                            | @ IF = 10mA | VF                   | 0.9         | V    |
| Power dissipation                          |             | Po                   | 350         | mW   |
| Thermal resistance junction to ambient air |             | R <sub>θJA</sub>     | 357         | °C/W |
| Operating and storage temperature range    |             | Т <sub>ј,</sub> Тѕтс | -65 to +150 | °C   |

Note: Valid provided that device terminals are kept at ambient temperature.

f = 1kHz.

# Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

| Marking | Zener Voltage Range |          |        | Max. Zener<br>Impedance |                          | Max. Reverse<br>Current |    | Typical<br>Temperature |            |                            |      |
|---------|---------------------|----------|--------|-------------------------|--------------------------|-------------------------|----|------------------------|------------|----------------------------|------|
| Code    |                     | Vz @ Izτ |        | lzт                     | <b>Z</b> zт@ <b>I</b> zт | Zzk@l                   | ZK | lR                     | <b>V</b> R | Coefficient@<br>Izтс mV/°С |      |
|         | Nom(V)              | Min(V)   | Max(V) | mA                      | 9                        | Ω                       | mA | μΑ                     | ٧          | Min.                       | Max. |
| Z14     | 3.3                 | 3.1      | 3.5    | 5                       | 95                       | 600                     | 1  | 5                      | 1          | -3.5                       | 0    |





Tested with pulses, 300µs pulse width, period = 5ms.


# 350mW Surface Mount Zener Diode




# Typical Characteristics @ TA = 25°C unless otherwise specified

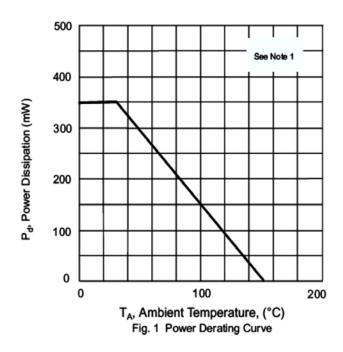

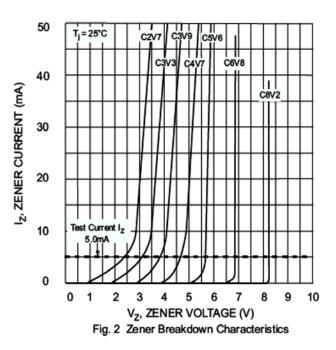

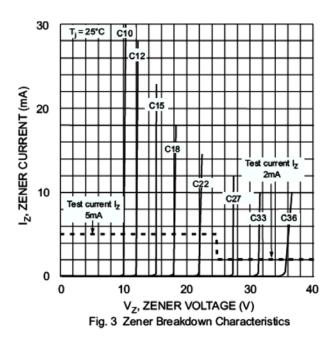


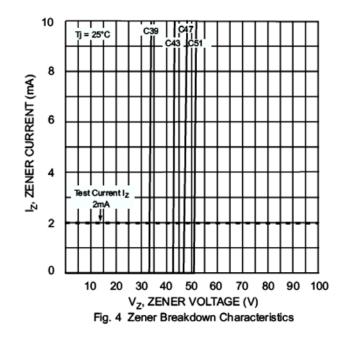

# 350mW Surface Mount Zener Diode




# Plastic surface mounted package

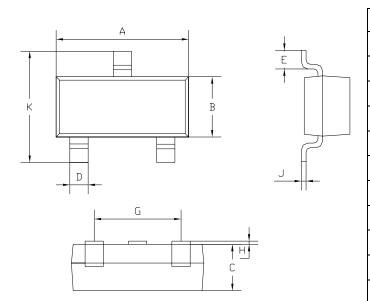

| SOT-23               |            |      |  |  |
|----------------------|------------|------|--|--|
| Dim                  | Min        | Max  |  |  |
| Α                    | 2.85       | 2.95 |  |  |
| В                    | 1.25       | 1.35 |  |  |
| С                    | 1 Typical  |      |  |  |
| D                    | 0.37       | 0.43 |  |  |
| E                    | 0.35       | 0.48 |  |  |
| G                    | 1.85       | 1.95 |  |  |
| Н                    | 0.02       | 0.1  |  |  |
| J                    | 0.1Typical |      |  |  |
| K                    | 2.35       | 2.45 |  |  |
| All Dimensions in mm |            |      |  |  |

## **Soldering Footprint**

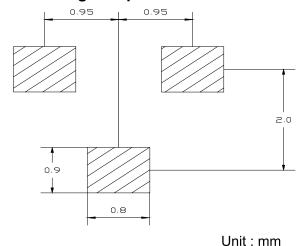

## **Package Information**

| Device        | Package | Shipping            |
|---------------|---------|---------------------|
| BZX84C3V3-7-F | SOT-23  | 3,000 / Tape & Reel |

#### m Part Number Table

| Description                     | Part Number   |  |
|---------------------------------|---------------|--|
| 350mW Surface Mount Zener Diode | BZX84C3V3-7-F |  |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

