

**RoHS
Compliant**



Product Description:

Part Number	3232	3234	3236	3238
Application	For communication and signal control systems			
Reference Standard	Customer's sample spec. and the general standard			
Multi-construction	1			


Construction:

Single	Bare Copper			
Construction	0.3 ±0.008 × 7	1.12 ±0.02	0.3 ±0.008 × 7	0.19 ±0.008 × 7
Stranded Dia.(mm)	0.92	1.12	0.92	0.58
Insulation	Solid PE	Gas injection Foam PE	Solid PE	Solid PE
Thickness	1.01	2.01	1.01	1.25
Insulation Dia.	(±0.15mm)	(±0.2mm)	(±0.15mm)	(±0.15mm)
	2.95	5.15	2.95	3.2
Insulation Colour	Natural			
Braiding	Bare Copper			
Construction (stranded)	0.12 ±0.008 × 16 × 6	0.12 ±0.008 × 16 × 6	0.12 ±0.008 × 16 × 6	0.12 ±0.008 × 16 × 6
Braiding coverage	85%	65%	85%	81%
Jacket	LSZH	PVC	PVC	PVC
Thickness (mm)	0.75	0.9	0.75	0.85
Dia.(±0.2mm)	5	7.3	5	5.8
Jacket Colour	Black			
Marking	RG Wire & Cable Limited URM 76 50Ω LSF [MM] {WkYr}	RG Wire & Cable Limited URM 203 75Ω PVC [MM] {WkYr}	RG Wire & Cable Limited URM 76 50Ω PVC [MM] {WkYr}	RG Wire & Cable Limited URM 70 75Ω PVC [MM] {WkYr}
Packaging	100m Reel	100m Drum	100m Reel	100m Cardboard Reel


Electrical Characteristics:

Part Number	3232	3234	3236	3238
DC Resistance inner core .at 20°C (Ω/Km)	<38.3	<19.2	<38.3	<95.5
Min.Insulation DC Resistance at 20°C (MΩ*KM)	500			
Rated Temperature(°C)			80	
Rated Voltage(V)			30	
Capacitance(pF/m)	100+/-5	52±4	100+/-5	<70
Velocity ratio (%)	66.7	82	66.7	66.7%
Impedance(Ω)	50±3	75±3	50±3	75+/-3
Attenuation at 20°C (- dB/100m) (+/-10%)		-		-
5 MHz	5.9	-	5.9	-
50 MHz	10.3	-	10.3	-
100 MHz	14.8	-	14.8	15
230 MHz	23	-	23	-
300 MHz	27	-	27	-
470 MHz	34.2	-	34.2	-
800 MHz	47	-	47	-
860 MHz	49	-	49	-
1,000 MHz	53	-	53	52


Design:




3232



3234



3236

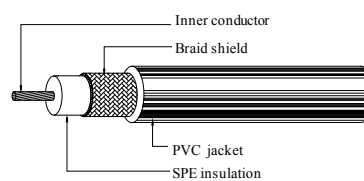

3238

Part Number Table

Description	Part Number
Cable, Coaxial, 100m, Black, URM76, LSZH	3232
Cable, Coaxial, 100m, Black, URM203	3234
Cable, Coaxial, 100m, Black, URM76, PVC	3236
Cable, Coaxial, 100m, Black, URM70	3238

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.