


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **[39-00-0428](#)**  
**Status:** **Active**  
**Overview:** Mini-Fit Jr.™  
**Description:** 4.20mm Pitch Mini-Fit® Crimp Terminal, Female, with Selective Gold (Au) and Selective Tin (Sn) over Nickel (Ni), 18-24 AWG, Reel

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Product Specification PS-5556-002 (PDF)</a>
<a href="#">Product Specification PS-51010-007 (PDF)</a>	<a href="#">Test Summary TS-5556-002 (PDF)</a>
<a href="#">Product Specification PS-52034-005 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-5556-001 (PDF)</a>	

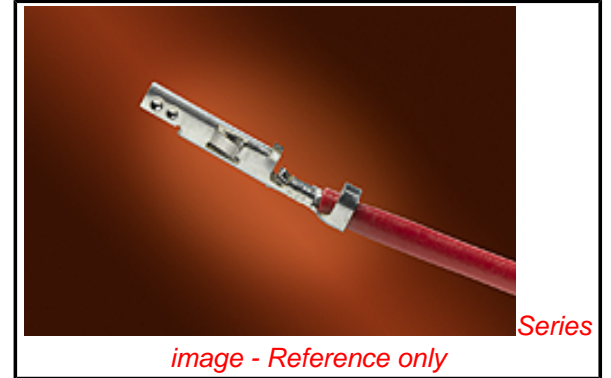

**General**

Product Family	Crimp Terminals
Series	5556
Application	Power
Crimp Quality Equipment	Yes
Overview	<u>Mini-Fit Jr.™</u>
Packaging Alternative	<u>39-00-0429 (Loose)</u>
Product Name	Mini-Fit®
UPC	822348149391

**Physical**

Durability (mating cycles max)	30
Gender	Receptacle
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Net Weight	130.000/mg
Packaging Type	Reel
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A

**Electrical**

Current - Maximum per Contact	9A
Voltage - Maximum	600V

**Material Info**

Old Part Number	5556GS7F
-----------------	----------

**Reference - Drawing Numbers**

Product Specification	PS-51010-007, PS-52034-005, PS-5556-001, PS-5556-002, RPS-501609-001, RPS-501609-002
Sales Drawing	SD-5556-006
Test Summary	TS-5556-002

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[5556Series](#)

**Mates With**

[5558](#) Mini-Fit® Crimp Male Terminals. Mini-Fit Jr.™ Header, Dual Row, [5566](#) , [5569](#)

**Use With**

[5557](#) Mini-Fit Jr.™ Receptacle Housing

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
FineAdjust™ Applicator for Insulation OD 2.50-2.95mm - 18-24 AWG	<a href="#">0639002600</a>
FineAdjust™ Applicator for	<a href="#">0639002900</a>

Insulation OD	
1.65-2.05mm - 18-24	
AWG	
FineAdjust™	<u>0639015600</u>
Applicator for	
Insulation OD	
1.90-2.30mm - 18-24	
AWG	
Extraction Tool	<u>0011030044</u>
FineAdjust™	<u>0639023900</u>
Applicator for	
Insulation OD	
1.40-1.70mm - 18-24	
AWG	
FineAdjust™	<u>0639024800</u>
Applicator for	
Insulation OD	
2.50-2.95mm	
Optimized for 18	
AWG Only	
FineAdjust™	<u>0639024900</u>
Applicator for	
Insulation OD	
2.30-2.60mm - 18-24	
AWG	
T2 Terminator™	<u>0639115600</u>
for insulation OD	
1.90-2.30mm - 18-24	
AWG	
T2 Terminator™	<u>0639124900</u>
for insulation OD	
2.30-2.60mm - 18-24	
AWG	
T2 Terminator™	<u>0639102600</u>
for insulation OD	
2.50-2.95mm - 18-24	
AWG	
T2 Terminator™ for	<u>0639102900</u>
insulation OD 1.65	
- 2.05mm - 18 - 24	
AWG	
T2 Terminator™	<u>0639123900</u>
for insulation OD	
1.40-1.70mm - 18-24	
AWG	
T2 Terminator™	<u>0639124800</u>
for insulation OD	
2.50-2.95mm	
optimized for 18	
AWG only	
Hand Crimp Tool for	<u>0638190900</u>
Male and Female	
Crimp Terminals,	
16-24 AWG Wire	

This document was generated on 04/29/2013

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**