



TIME RELAY,  
 MULTI-FUNCTION 1 CHANGEOVER,  
 8 FUNCTIONS,  
 15 TIME SETTING RANGES AC/DC 24 V AND AC 200...  
 240 V WITH LED,  
 SCREW CONNECTION

General technical details:		
<b>product brand name</b>		SIRIUS
<b>product designation</b>		timing relay
<b>Protection class IP / on the front</b>		IP40
<b>Protection class IP / of the terminal</b>		IP20
<b>mounting position</b>		any
<b>Supply voltage frequency</b>		
<ul style="list-style-type: none"> <li>• 1 / for auxiliary and control current circuit</li> </ul>		
<ul style="list-style-type: none"> <li>• initial rated value</li> </ul>	Hz	50
<ul style="list-style-type: none"> <li>• final rated value</li> </ul>	Hz	60
<b>Product function</b>		
<ul style="list-style-type: none"> <li>• star-delta circuit</li> </ul>		No
<ul style="list-style-type: none"> <li>• with auxiliary voltage / pulse-shaping</li> </ul>		Yes
<ul style="list-style-type: none"> <li>• at the relay outputs / changeover delayed/without delay</li> </ul>		No
<b>Product component / semi-conductor output</b>		No
<b>Product extension / optional / remote control</b>		No
<b>Product extension / strictly required / remote control</b>		No
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	°C	-40 ... +85

• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +85
<b>Relative humidity</b>		
• during operating phase	%	15 ... 70
<b>Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4</b>		2 kV network connection / 1 kV control connection
<b>Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5</b>		2 kV
<b>Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5</b>		1 kV
<b>Electrostatic discharge / according to IEC 61000-4-2</b>		4 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling / according to IEC 61000-4-3</b>		10 V/m
<b>Resistance against vibration</b>		10 ... 55 Hz / 0.35 mm
<b>Impulse voltage resistance / rated value</b>	V	4,000
<b>Insulation voltage / rated value</b>	V	300
<b>Active power loss / total / typical</b>	W	2
<b>Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</b>		K
<b>Item designation / according to DIN EN 61346-2</b>		K
<b>Category / according to EN 954-1</b>		none
<b>Protection against electrical shock</b>		finger-safe

#### Switching Function:

##### Switching function

• slow-operating	Yes
• making pulse contact	No
• firmly clocked beginning with pulse	No
• firmly clocked beginning with pause	Yes
• relapse delayed	Yes
• variably clocked start with impulse	No
• impuls variably clocked start with pause	No
• with auxiliary voltage	
• in an additive way slow-operating	Yes
• temporary line fault	Yes
• relapse delayed	Yes
• without auxiliary voltage / relapse delayed	No
• slow-operating/instantaneous contact	No
• with auxiliary voltage	
• relapse delayed/instantaneous contact	No
• slow-operating/relapse delayed/instantaneous contact	No
• firmly clocked beginning with pause/instantaneous contact	No

- making pulse contact/instantaneous contact
- with auxiliary voltage
  - temporary line fault/instantaneous contact
  - pulse modelling/instantaneous contact
  - slow-operating/instantaneous contact

No  
No  
No  
No

#### General details:

##### Type of voltage / of the controlled supply voltage

AC/DC

##### Control supply voltage frequency

- 1

Hz

50 ... 60

##### Control supply voltage

- 1
  - at 50 Hz / for AC / rated value
  - at 60 Hz / for AC / rated value
  - for DC / rated value
- 2
  - at 50 Hz
    - for AC
  - at 60 Hz
    - for AC

V

24

V

24

V

24

V

200 ... 240

V

200 ... 240

##### Operating range factor control supply voltage rated value

- at 50 Hz
  - for AC
- at 60 Hz
  - for AC
- for DC

0.85 ... 1.1

0.85 ... 1.1

0.85 ... 1.1

#### Auxiliary circuit:

##### Operating current / of auxiliary contacts

- as normally closed contact / for AC-15
  - at 24 V
  - at 250 V
- as normally open contact / for AC-15
  - at 24 V
  - at 250 V
- at AC-15
  - maximum
- at DC-13
  - at 24 V
  - at 125 V
  - at 250 V

A

3

A

3

A

3

A

3

A

3

A

1

A

0.2

A

0.1

<b>Number of NC contacts / delayed switching</b>		0
<b>Number of NC contacts / non-delayed</b>		0
<b>Number of NO contacts / delayed switching</b>		0
<b>Number of NO contacts / non-delayed</b>		0
<b>Number of change-over switches / delayed switching</b>		1
<b>Number of change-over switches / non-delayed</b>		0

#### Short-circuit:

<b>Design of the fuse link / for short-circuit protection of the auxiliary switch / required</b>		fuse gL/gG: 4 A
<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail

#### Installation/mounting/dimensions:

<b>Width</b>	mm	22.5
<b>Height</b>	mm	102
<b>Depth</b>	mm	91
<b>Distance, to be maintained, to the ranks assembly</b>		
• upwards	mm	0
• forwards	mm	0
• sideways	mm	0
• backwards	mm	0
• downwards	mm	0
<b>Distance, to be maintained, to earthed part</b>		
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
<b>Distance, to be maintained, conductive elements</b>		
• downwards	mm	0
• backwards	mm	0
• sideways	mm	0
• forwards	mm	0
• upwards	mm	0

#### Connections:

<b>Design of the snap-on socket base</b>		none
<b>Design of the electrical connection</b>		
• jumper socket		No
• for auxiliary and control current circuit		screw-type terminals

Type of the connectable conductor cross-section / for auxiliary contacts / solid		0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )
Conductor cross-section that can be connected / for auxiliary contact / solid		
• minimum	mm <sup>2</sup>	0.5
• maximum	mm <sup>2</sup>	4
Type of the connectable conductor cross-section / for auxiliary contacts / finely stranded / with conductor end processing		0.5 ... 2.5 mm <sup>2</sup> , 2x (0.5 ... 1.5 mm <sup>2</sup> )
Conductor cross-section that can be connected / for auxiliary contact / finely stranded / with conductor end processing		
• minimum	mm <sup>2</sup>	0.5
• maximum	mm <sup>2</sup>	2.5
Type of the connectable conductor cross-section / for AWG conductors / for auxiliary contacts		2x (20 ... 14)
AWG number / as coded connectable conductor cross-section / for auxiliary contact		
• minimum		20
• maximum		14

#### Certificates/approvals:

##### Verification of suitability

CE / UL / CSA

##### General Product Approval

##### Declaration of Conformity

##### Test Certificates



CCC



CSA



GOST



UL



EG-Konf.

[Special Test Certificate](#)

##### Shipping Approval



DNV



GL



LRS



PRS



RINA

##### Shipping Approval

other



RMRS

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)


<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3RP1505-1AP30/all>

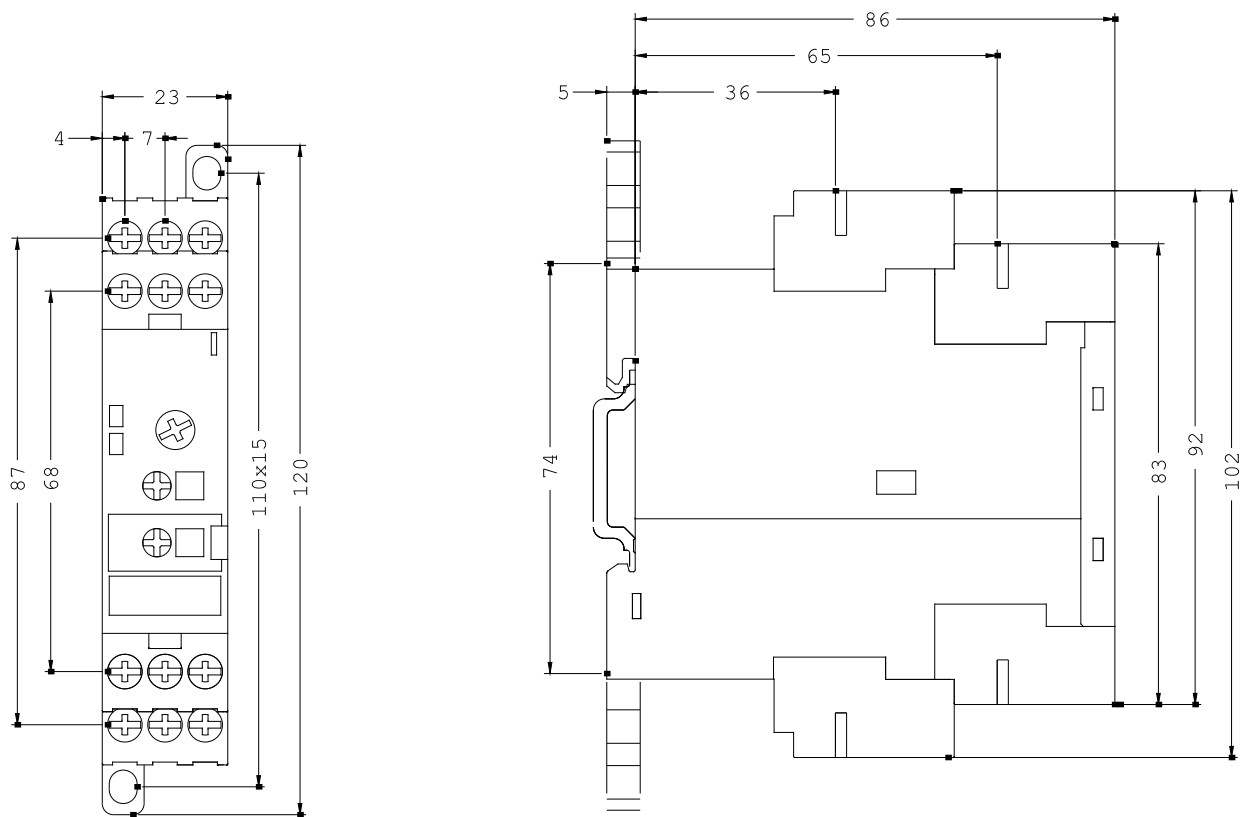

last change:

Apr 23, 2013