

# Code Composer Studio™ v5.5 User's Guide for MSP430™

## User's Guide



Literature Number: SLAU157Z  
May 2005–Revised September 2013

<b>Preface</b> .....	<b>5</b>
<b>1 Get Started Now!</b> .....	<b>7</b>
1.1 Software Installation .....	8
1.2 Flashing the LED .....	8
1.3 Important MSP430™ Documents on the DVD and Web .....	9
<b>2 Development Flow</b> .....	<b>10</b>
2.1 Using the Code Composer Studio™ IDE (CCS) .....	11
2.1.1 Creating a Project From Scratch .....	11
2.1.2 Project Settings .....	12
2.1.3 Using Math Library for MSP430 (MSPMathlib) in CCS v5.5 and Newer .....	12
2.1.4 Using an Existing CCE v2, CCE v3, CCE v3.1, CCS v4.x, or CCS v5.x Project .....	12
2.1.5 Stack Management .....	13
2.1.6 How to Generate Binary Format Files (TI-TXT and INTEL-HEX) .....	14
2.2 Using the Integrated Debugger .....	14
2.2.1 Breakpoint Types .....	14
2.2.2 Using Breakpoints .....	16
<b>A Frequently Asked Questions</b> .....	<b>18</b>
A.1 Hardware .....	19
A.2 Program Development (Assembler, C-Compiler, Linker, IDE) .....	19
A.3 Debugging .....	20
<b>B Migration of C Code from IAR 2.x, 3.x, or 4.x to CCS</b> .....	<b>23</b>
B.1 Interrupt Vector Definition .....	24
B.2 Intrinsic Functions .....	24
B.3 Data and Function Placement .....	24
B.3.1 Data Placement at an Absolute Location .....	24
B.3.2 Data Placement Into Named Segments .....	25
B.3.3 Function Placement Into Named Segments .....	25
B.4 C Calling Conventions .....	26
B.5 Other Differences .....	26
B.5.1 Initializing Static and Global Variables .....	26
B.5.2 Custom Boot Routine .....	27
B.5.3 Predefined Memory Segment Names .....	27
B.5.4 Predefined Macro Names .....	28
<b>C Migration of Assembler Code from IAR 2.x, 3.x, or 4.x to CCS</b> .....	<b>29</b>
C.1 Sharing C/C++ Header Files With Assembly Source .....	30
C.2 Segment Control .....	30
C.3 Translating A430 Assembler Directives to Asm430 Directives .....	31
C.3.1 Introduction .....	31
C.3.2 Character Strings .....	31
C.3.3 Section Control Directives .....	32
C.3.4 Constant Initialization Directives .....	32
C.3.5 Listing Control Directives .....	33
C.3.6 File Reference Directives .....	33
C.3.7 Conditional Assembly Directives .....	34

C.3.8	Symbol Control Directives .....	34
C.3.9	Macro Directives .....	35
C.3.10	Miscellaneous Directives .....	35
C.3.11	Alphabetical Listing and Cross Reference of Asm430 Directives .....	36
C.3.12	Unsupported A430 Directives (IAR) .....	37
<b>D</b>	<b>FET-Specific Menus .....</b>	<b>38</b>
D.1	Menus .....	39
D.1.1	Debug View: Run → Free Run .....	39
D.1.2	Run → Connect Target .....	39
D.1.3	Run → Advanced → Make Device Secure .....	39
D.1.4	Project → Properties → Debug → MSP430 Properties → Clock Control .....	39
D.1.5	Window → Show View → Breakpoints .....	39
D.1.6	Window → Show View → Other... Debug → Trace Control .....	39
D.1.7	Project → Properties → Debug → MSP430 Properties → Target Voltage .....	39
<b>E</b>	<b>Device Specific Menus .....</b>	<b>40</b>
E.1	MSP430L092 .....	40
E.1.1	Emulation Modes .....	40
E.1.2	Loader Code .....	42
E.1.3	C092 Password Protection .....	42
E.2	MSP430F5xx and MSP430F6xx BSL Support .....	43
E.3	MSP430FR5xx and MSP430FR6xx Password Protection .....	44
E.4	LPMx.5 CCS Debug Support .....	45
E.4.1	Debugging With LPMx.5 .....	45
E.4.2	LPMx.5 Debug Limitations .....	46
	<b>Revision History .....</b>	<b>47</b>

---

## List of Figures

E-1.	MSP430L092 Modes .....	41
E-2.	MSP430L092 in C092 Emulation Mode .....	42
E-3.	MSP430C092 Password Access .....	43
E-4.	Allow Access to BSL .....	44
E-5.	MSP430 Password Access .....	45
E-6.	Enabling LPMx.5 Debug Support .....	46

## List of Tables

1-1.	System Requirements .....	8
2-1.	Device Architecture, Breakpoints, and Other Emulation Features .....	15

## Read This First

---

---

---

### About This Manual

This manual describes the use of Texas Instruments™ Code Composer Studio™ IDE v5.5 (CCS v5.5) with the MSP430™ ultralow-power microcontrollers. This manual describes only the Windows version of the Code Composer Studio IDE. The Linux version is similar and, therefore, is not described separately.

### How to Use This Manual

Read and follow the instructions in the [Get Started Now!](#) chapter. This chapter includes instructions on installing the software and describes how to run the demonstration programs. After you see how quick and easy it is to use the development tools, TI recommends that you read all of this manual.

This manual describes only the setup and basic operation of the software development environment but does not fully describe the MSP430 microcontrollers or the complete development software and hardware systems. For details on these items, see the appropriate TI documents listed in [Section 1.3, Important MSP430 Documents on the DVD and Web](#), and in [Related Documentation From Texas Instruments](#).

This manual applies to the use of CCS with the Texas Instruments MSP-FET430UIF, eZ-FET, and eZ430 development tools series.

These tools contain the most up-to-date materials available at the time of packaging. For the latest materials (including data sheets, user's guides, software, and application information), visit the TI MSP430 web site at [www.ti.com/msp430](http://www.ti.com/msp430) or contact your local TI sales office.

### Information About Cautions and Warnings

This document may contain cautions and warnings.

#### CAUTION

This is an example of a caution statement.

A caution statement describes a situation that could potentially damage your software or equipment.

#### WARNING

This is an example of a warning statement.

A warning statement describes a situation that could potentially cause harm to you.

The information in a caution or a warning is provided for your protection. Read each caution and warning carefully.

Texas Instruments, Code Composer Studio, MSP430 are trademarks of Texas Instruments.  
IAR Embedded Workbench is a registered trademark of IAR Systems AB.  
ThinkPad is a registered trademark of Lenovo.  
Microsoft, Windows, Windows Vista, Windows 7 are registered trademarks of Microsoft Corporation.  
All other trademarks are the property of their respective owners.

## Related Documentation From Texas Instruments

### CCS v5.5 documentation

*MSP430™ Assembly Language Tools User's Guide*, literature number [SLAU131](#)

*MSP430™ Optimizing C/C++ Compiler User's Guide*, literature number [SLAU132](#)

### MSP430™ development tools documentation

*MSP430™ Hardware Tools User's Guide*, literature number [SLAU278](#)

*eZ430-F2013 Development Tool User's Guide*, literature number [SLAU176](#)

*eZ430-RF2480 User's Guide*, literature number [SWRA176](#)

*eZ430-RF2500 Development Tool User's Guide*, literature number [SLAU227](#)

*eZ430-RF2500-SEH Development Tool User's Guide*, literature number [SLAU273](#)

*eZ430-Chronos™ Development Tool User's Guide*, literature number [SLAU292](#)

*MSP-EXP430G2 LaunchPad Experimenter Board User's Guide*, literature number [SLAU318](#)

### MSP430™ device data sheets

*MSP430x1xx Family User's Guide*, literature number [SLAU049](#)

*MSP430x2xx Family User's Guide*, literature number [SLAU144](#)

*MSP430x3xx Family User's Guide*, literature number [SLAU012](#)

*MSP430x4xx Family User's Guide*, literature number [SLAU056](#)

*MSP430x5xx and MSP430x6xx Family User's Guide*, literature number [SLAU208](#)

### CC430 device data sheets

*CC430 Family User's Guide*, literature number [SLAU259](#)

## If You Need Assistance

Support for the MSP430 microcontrollers and the FET development tools is provided by the Texas Instruments Product Information Center (PIC). Contact information for the PIC can be found on the TI web site at [www.ti.com/support](http://www.ti.com/support). A Code Composer Studio specific [Wiki page \(FAQ\)](#) is available, and the Texas Instruments [E2E Community support forums](#) for the [MSP430](#) and [Code Composer Studio v5.5](#) provide open interaction with peer engineers, TI engineers, and other experts. Additional device-specific information can be found on the [MSP430 web site](#).

## ***Get Started Now!***

---

---

---

This chapter provides instructions on installing the software, and shows how to run the demonstration programs.

<b>Topic</b>	<b>Page</b>
<b>1.1 Software Installation .....</b>	<b>8</b>
<b>1.2 Flashing the LED .....</b>	<b>8</b>
<b>1.3 Important MSP430™ Documents on the DVD and Web .....</b>	<b>9</b>

## 1.1 Software Installation

To install Code Composer Studio™ IDE v5.5 (CCS), run setup\_CCS\_x.x.x.x.exe from the DVD. If the CCS package was downloaded, extract the full zip archive before running setup\_CCS\_x.x.x.x.exe. Follow the instructions shown on the screen. The hardware drivers for the USB JTAG emulators (MSP-FET430UIF, eZ-FET and eZ430 series) are installed automatically when installing CCS. The parallel-port FET (MSP-FET430PIF) legacy debug interface is no longer supported in this version of CCS.

---

**NOTE:** The legacy MSP-FET430PIF (parallel port emulator) is not supported by this version of CCS.

---



---

**NOTE:** Fully extract the zip archive (setup\_CCS\_x\_x\_x.zip) before running setup\_CCS\_x.x.x.x.exe.

---

**Table 1-1. System Requirements**

	Recommended System Requirements	Minimum System Requirements
<b>Processor</b>	Dual Core	1.5 GHz
<b>RAM</b>	2 GB	1 GB
<b>Free Disk Space</b>	2 GB	300 MB (depends on features selected during installation)
<b>Operating System</b>	Microsoft® Windows® XP with SP2 (32 or 64 bit) or Windows Vista® with SP1 (32 or 64 bit) or Windows 7® (32 or 64 bit)	Microsoft® Windows® XP with SP2 (32 or 64 bit) or Windows Vista® (32 or 64 bit) or Windows 7® (32 or 64 bit)

## 1.2 Flashing the LED

This section demonstrates on the FET the equivalent of the C-language "Hello world!" introductory program. CCS v5.5 includes C code template files that allow flashing the LED in no time. The following describes how to get started.

1. Start Code Composer Studio Start → All Programs → Texas Instruments → Code Composer Studio → Code Composer Studio.
2. Create a new Project by selecting File → New → CCS Project.
3. Enter a project name.
4. Set the Device Family to MSP430 and select the Device Variant that is in use (for example, MSP430F2274).
5. Select "Blink The LED" in the "Project templates and example" section.
6. Click Finish.

---

**NOTE:** The predefined examples work with most MSP430 boards. Specific examples are automatically selected for MSP430G221x, MSP430L092, and MSP430FR59xx devices. Certain MSP430F4xx boards use Port P5.0 for the LED connection, which must be changed manually in the code.

---

7. To compile the code and download the application to the target device, click Run → Debug (F11).

### CAUTION

Never disconnect the JTAG or emulator USB cable during an active debug session. Always terminate a running debug session properly (by clicking on the "Terminate" icon) before disconnection the target device.

8. To start the application, click Run → Resume (F8) or click the Play button on the toolbar. See FAQ [Debugging #1](#) if the CCS debugger is unable to communicate with the device.

Congratulations, you have just built and tested an MSP430 application!

### **1.3 Important MSP430™ Documents on the DVD and Web**

The primary sources of MSP430 and CCS v5.5 information are the device-specific data sheets and user's guides. The most up-to-date versions of these documents available at the time of production have been provided on the DVD included with this tool. The MSP430 web site ([www.ti.com/msp430](http://www.ti.com/msp430)) contains the latest version of these documents.

## ***Development Flow***

---

---

---

This chapter describes how to use Code Composer Studio (CCS) to develop application software and how to debug that software.

<b>Topic</b>	<b>Page</b>
<b>2.1 Using the Code Composer Studio™ IDE (CCS) .....</b>	<b>11</b>
<b>2.2 Using the Integrated Debugger .....</b>	<b>14</b>

## 2.1 Using the Code Composer Studio™ IDE (CCS)

The following sections are an overview of how to use CCS. For a full description of the software development flow with CCS in assembly or C, see the *MSP430 Assembly Language Tools User's Guide* ([SLAU131](#)) and the *MSP430 Optimizing C/C++ Compiler User's Guide* ([SLAU132](#)).

### 2.1.1 Creating a Project From Scratch

This section presents step-by-step instructions to create an assembly or C project from scratch and to download and run the application on the MSP430 (see [Section 2.1.2, Project Settings](#)). Also, the MSP430 Code Composer Studio Help presents a more comprehensive overview of the process.

1. Start the CCS (Start → All Programs → Texas Instruments → Code Composer Studio → Code Composer Studio).
2. Create new project (File → New → CCS Project). Enter the name for the project, click next and set Device Family to MSP430.
3. Select the appropriate device variant. For assembly only projects, select "Empty Assembly-only Project" in the "Project template and examples" section.
4. If using a USB Flash Emulation Tool such as the MSP-FET430UIF, eZ-FET or the eZ430 Development Tool, they should be already configured by default.
5. For C projects the setup is complete now, main.c is shown, and code can be entered. In case of an assembly project, a new source file must be created (File → New → Source File). Enter the file name and remember to add the .asm suffix. If, instead, you want to use an existing source file for your project, click Project → Add Files... and browse to the file of interest. Single click on the file and click Open or double-click on the file name to complete the addition of it into the project folder.
6. Click Finish.
7. Enter the program text into the file.

---

**NOTE:** Use .h files to simplify code development.

CCS is supplied with files for each device that define the device registers and the bit names. Using these files is recommended and can greatly simplify the task of developing a program. To include the .h file corresponding to the target device, add the line `#include <msp430xyyy.h>` for C and `.cdecls C,LIST,"msp430xyyy"` for assembly code, where `xyyy` specifies the MSP430 part number.

---

8. Build the project (Project → Build Project).
9. Debug the application (Run → Debug (F11)). This starts the debugger, which gains control of the target, erases the target memory, programs the target memory with the application, and resets the target.  
See FAQ [Debugging #1](#) if the debugger is unable to communicate with the device.
10. Click Run → Resume (F8) to start the application.
11. Click Run → Terminate to stop the application and to exit the debugger. CCS returns to the C/C++ view (code editor) automatically.

#### CAUTION

Never disconnect the JTAG or emulator USB cable during an active debug session. Always terminate a running debug session properly (by clicking on the "Terminate" icon) before disconnection the target device.

12. Click File → Exit to exit CCS.

## 2.1.2 Project Settings

The settings required to configure the CCS are numerous and detailed. Most projects can be compiled and debugged with default factory settings. The project settings are accessed by clicking Project → Properties for the active project. The following project settings are recommended or required:

- Specify the target device for debug session (Project → Properties → General → Device → Variant). The corresponding Linker Command File and Runtime Support Library are selected automatically.
- To more easily debug a C project, disable optimization (Project → Properties → Build → MSP430 Compiler → Optimization → Optimization level).
- Specify the search path for the C preprocessor (Project → Properties → Build → MSP430 Compiler → Include Options).
- Specify the search path for any libraries being used (Project → Properties → Build → MSP430 Compiler → File Search Path).
- Specify the debugger interface (Project → Properties → General → Device → Connection). Select TI MSP430 LPTx for the parallel FET interface or TI MSP430 USBx for the USB interface.
- Enable the erasure of the Main and Information memories before object code download (Project → Properties → Debug → MSP430 Properties → Download Options → Erase Main and Information Memory).
- To ensure proper standalone operation, disable Software Breakpoints (Project → Properties → Debug → MSP430 Properties → Enable Software Breakpoints). If Software Breakpoints are enabled, ensure proper termination of each debug session while the target is connected; otherwise, the target may not be operational standalone as the application on the device still contains the software breakpoint instructions.

## 2.1.3 Using Math Library for MSP430 (MSPMathlib) in CCS v5.5 and Newer

TI's MSPMathlib is part of CCSv5.5 and newer releases. This optimized library provides up to 26x better performance in applications that use floating point scalar math. For details, see the MSPMathlib web page (<http://www.ti.com/tool/mspmathlib>).

MSPMathlib is active by default in CCSv5.5 for all new projects on all supported devices. For imported projects, it is used only if the project already uses MSPMathlib or if it has been manually enabled.

To disable MSPMathlib: Remove libmath.a under Project → Properties → Build → MSP430 Linker → File Search Path in the "Include library file or command file as input (--library, -l)" field.

To enable MSPMathlib: Add libmath.a under Project → Properties → Build → MSP430 Linker → File Search Path in the "Include library file or command file as input (--library, -l)" field. Important: Put libmath.a before other libraries that may be listed here.

## 2.1.4 Using an Existing CCE v2, CCE v3, CCE v3.1, CCS v4.x, or CCS v5.x Project

CCS v5.5 supports the conversion of workspaces and projects created in version CCE v2, v3, v3.1 and CCS v4.x, CCS v5.x to the CCS v5.5 format (File → Import → General → Existing Projects into Workspace → Next). Browse to legacy CCE or CCS workspace that contains the project to be imported. The Import Wizard lists all of the projects in the given workspace. Specific Projects can then be selected and converted. CCEv2 and CCEv3 projects may require manual changes to the target configuration file (\*.ccxml) after import.

CCS may return a warning that an imported project was built with another version of Code Generation Tools (CGT) depending on the previous CGT version.

While the support for assembly projects has not changed, the header files for C code have been modified slightly to improve compatibility with the IAR Embedded Workbench® IDE (interrupt vector definitions). The definitions used in CCE 2.x are still given but have been commented out in all header files. To support CCE 2.x C code, remove the "//" in front of the #define statements that are located at the end of each .h file in the section "Interrupt Vectors".

### 2.1.5 Stack Management

The reserved stack size can be configured through the project options (Project → Properties → Build → MSP430 Linker → Basic Options → Set C System Stack Size). Stack size is defined to extend from the last location of RAM for 50 to 80 bytes (that is, the stack extends downwards through RAM for 50 to 80 bytes, depending on the RAM size of the selected device).

Note that the stack can overflow due to small size or application errors. See [Section 2.2.2.1](#) for a method of tracking the stack size.

### 2.1.6 How to Generate Binary Format Files (TI-TXT and INTEL-HEX)

The CCS installation includes the hex430.exe conversion tool. It can be configured to generate output objects in TI-TXT format for use with the MSP-GANG430 and MSP-PRGS430 programmers, as well as INTEL-HEX format files for TI factory device programming. The tool can be used either standalone in a command line (located in <Installation Root>\ccsv5\ccs\_base\tools\compiler\msp430\bin) or directly within CCS. In the latter case, a post-build step can be configured to generate the file automatically after every build by selecting predefined formats such as TI-TXT and INTEL-HEX in the "Apply Predefined Step" pulldown menu (Project → Properties → Build → Build Steps Tab → Post-Build Step → Apply Predefined Step). The generated file is stored in the <Workspace>\<Project>\Debug\ directory.

## 2.2 Using the Integrated Debugger

See [Appendix D](#) for a description of FET-specific menus within CCS.

### 2.2.1 Breakpoint Types

The debugger breakpoint mechanism uses a limited number of on-chip debugging resources (specifically, N breakpoint registers, see [Table 2-1](#)). When N or fewer breakpoints are set, the application runs at full device speed (or "realtime"). When greater than N breakpoints are set and Use Software Breakpoints is enabled (Project → Properties → Debug → MSP430 Properties → Enable Software Breakpoints), an unlimited number of software breakpoints can be set while still meeting realtime constraints.

---

**NOTE:** A software breakpoint replaces the instruction at the breakpoint address with a call to interrupt the code execution. Therefore, there is a small delay when setting a software breakpoint. In addition, the use of software breakpoints always requires proper termination of each debug session; otherwise, the application may not be operational standalone, because the application on the device would still contain the software breakpoint instructions.

---

Both address (code) and data (value) breakpoints are supported. Data breakpoints and range breakpoints each require two MSP430 hardware breakpoints.

**Table 2-1. Device Architecture, Breakpoints, and Other Emulation Features**

Device	MSP430 Architecture	4-Wire JTAG	2-Wire JTAG <sup>(1)</sup>	Break-points (N)	Range Break-points	Clock Control	State Sequencer	Trace Buffer	LPMx.5 Debugging Support
CC430F512x	MSP430Xv2	X	X	3	X	X			X
CC430F513x	MSP430Xv2	X	X	3	X	X			
CC430F514x	MSP430Xv2	X	X	3	X	X			X
CC430F612x	MSP430Xv2	X	X	3	X	X			
CC430F613x	MSP430Xv2	X	X	3	X	X			
CC430F614x	MSP430Xv2	X	X	3	X	X			X
MSP430AFE2xx	MSP430	X	X	2		X			
MSP430BT5190	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F11x1	MSP430	X		2					
MSP430F11x2	MSP430	X		2					
MSP430F12x	MSP430	X		2					
MSP430F12x2	MSP430	X		2					
MSP430F13x	MSP430	X		3	X				
MSP430F14x	MSP430	X		3	X				
MSP430F15x	MSP430	X		8	X	X	X	X	
MSP430F16x	MSP430	X		8	X	X	X	X	
MSP430F161x	MSP430	X		8	X	X	X	X	
MSP430F20xx	MSP430	X	X	2		X			
MSP430F21x1	MSP430	X		2		X			
MSP430F21x2	MSP430	X	X	2		X			
MSP430F22x2	MSP430	X	X	2		X			
MSP430F22x4	MSP430	X	X	2		X			
MSP430F23x	MSP430	X		3	X	X			
MSP430F23x0	MSP430	X		2		X			
MSP430F24x	MSP430	X		3	X	X			
MSP430F241x	MSP430X	X		8	X	X	X	X	
MSP430F2410	MSP430	X		3	X	X			
MSP430F261x	MSP430X	X		8	X	X	X	X	
MSP430G2xxx	MSP430	X	X	2		X			
MSP430F41x	MSP430	X		2		X			
MSP430F41x2	MSP430	X	X	2		X			
MSP430F42x	MSP430	X		2		X			
MSP430FE42x	MSP430	X		2		X			
MSP430FE42x2	MSP430	X		2		X			
MSP430FW42x	MSP430	X		2		X			
MSP430F42x0	MSP430	X		2		X			
MSP430FG42x0	MSP430	X		2		X			
MSP430F43x	MSP430	X		8	X	X	X	X	
MSP430FG43x	MSP430	X		2		X			
MSP430F43x1	MSP430	X		2		X			
MSP430F44x	MSP430	X		8	X	X	X	X	
MSP430F44x1	MSP430	X		8	X	X	X	X	
MSP430F461x	MSP430X	X		8	X	X	X	X	
MSP430FG461x	MSP430X	X		8	X	X	X	X	

<sup>(1)</sup> The 2-wire JTAG debug interface is also referred to as Spy-Bi-Wire (SBW) interface. This interface is supported only by the USB emulators (eZ430-xxxx, eZ-FET, and MSP-FET430UIF USB JTAG emulator) and the MSP-GANG430 production programming tool.

**Table 2-1. Device Architecture, Breakpoints, and Other Emulation Features (continued)**

Device	MSP430 Architecture	4-Wire JTAG	2-Wire JTAG <sup>(1)</sup>	Breakpoints (N)	Range Breakpoints	Clock Control	State Sequencer	Trace Buffer	LPMx.5 Debugging Support
MSP430F461x1	MSP430X	X		8	X	X	X	X	
MSP430F47x	MSP430	X		2		X			
MSP430FG47x	MSP430	X		2		X			
MSP430F47x3	MSP430	X		2		X			
MSP430F47x4	MSP430	X		2		X			
MSP430F471xx	MSP430X	X		8	X	X	X	X	
MSP430F51x1	MSP430Xv2	X	X	3	X	X			
MSP430F51x2	MSP430Xv2	X	X	3	X	X			
MSP430F52xx	MSP430Xv2	X	X	3	X	X			
MSP430F530x	MSP430Xv2	X	X	3	X	X			
MSP430F5310	MSP430Xv2	X	X	3	X	X			
MSP430F532x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F533x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F534x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F54xx	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F54xxA	MSP430Xv2	X	X	8	X	X	X	X	
MSP430SL54xxA	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F550x	MSP430Xv2	X	X	3	X	X			
MSP430F5510	MSP430Xv2	X	X	3	X	X			
MSP430F552x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F535x	MSP430Xv2	X	X	8	X	X	X	X	X
MSP430F563x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F565x	MSP430Xv2	X	X	8	X	X	X	X	X
MSP430FR57xx	MSP430Xv2	X	X	3	X	X			X
MSP430FR59xx	MSP430Xv2	X	X	3	X	X			X
MSP430F643x	MSP430Xv2	X	X	8	X	X	X	X	
MSP430F645x	MSP430Xv2	X	X	8	X	X	X	X	X
MSP430F665x	MSP430Xv2	X	X	8	X	X	X	X	X
MSP430F663x	MSP430Xv2	X	X	8	X	X	X	X	X
MSP430F67xx	MSP430Xv2	X	X	3	X	X			
MSP430i20xx	MSP430	X	X	2		X			
MSP430L092	MSP430Xv2	X		2		X			
MSP430TCH5E	MSP430	X	X	2		X			

## 2.2.2 Using Breakpoints

If the debugger is started with greater than N breakpoints set and software breakpoints are disabled, a message is shown that informs the user that not all breakpoints can be enabled. Note that CCS permits any number of breakpoints to be set, regardless of the Use Software Breakpoints setting of CCS. If software breakpoints are disabled, a maximum of N breakpoints can be set within the debugger.

Resetting a program requires a breakpoint, which is set on the address defined in Project → Properties → Debug → Generic Debugger Options → Auto Run Options → Run to symbol.

The Run To Cursor operation temporarily requires a breakpoint.

Console I/O (CIO) functions, such as printf, require the use of a breakpoint. If these functions are compiled in, but you do not wish to use a breakpoint, disable CIO functionality by changing the option in Project → Properties → Debug → Generic Debug Options → Enable CIO function use.

### 2.2.2.1 Breakpoints in CCS v5.5

CCS supports a number of predefined breakpoint types that can be selected by opening a menu found next to the Breakpoints icon in the Breakpoint window (Window → Show View → Breakpoints). In addition to traditional breakpoints, CCS allows setting watchpoints to break on a data address access instead of an address access. The properties of breakpoints and watchpoints can be changed in the debugger by right clicking on the breakpoint and selecting Properties.

- **Break after program address**  
Stops code execution when the program attempts to execute code after a specific address.
- **Break before program address**  
Stops code execution when the program attempts to execute code before a specific address.
- **Break in program range**  
Stops code execution when the program attempts to execute code in a specific range.
- **Break on DMA transfer**
- **Break on DMA transfer in range**  
Breaks when a DMA access within a specified address range occurs.
- **Break on stack overflow**  
It is possible to debug the applications that caused the stack overflow. Set Break on Stack Overflow (right click in debug window and then select "Break on Stack Overflow" in the context menu). The program execution stops on the instruction that caused the stack overflow. The size of the stack can be adjusted in Project → Properties → C/C++ Build → MSP430 Linker → Basic Options.
- **Breakpoint**  
Sets a breakpoint.
- **Hardware breakpoint**  
Forces a hardware breakpoint if software breakpoints are not disabled.
- **Watch on data address range**  
Stops code execution when data access to an address in a specific range occurs.
- **Watch**  
Stops code execution if a specific data access to a specific address is made.
- **Watchpoint with data**  
Stops code execution if a specific data access to a specific address is made with a specific value.  
Restriction 1: Watchpoints are applicable to global variables and non-register local variables. In the latter case, set a breakpoint (BP) to halt execution in the function where observation of the variable is desired (set code breakpoint there). Then set the watchpoint and delete (or disable) the code breakpoint in the function and run or restart the application.  
Restriction 2: Watchpoints are applicable to variables 8 bits and 16 bits wide.

---

**NOTE:** Not all options are available on every MSP430 derivative (see [Table 2-1](#)). Therefore, the number of predefined breakpoint types in the breakpoint menu varies depending on the selected device.

---

For more information on advanced debugging with CCS, see the application report *Advanced Debugging Using the Enhanced Emulation Module (EEM) With CCS Version 4* ([SLAA393](#)).

## Frequently Asked Questions

---

---

This appendix presents solutions to frequently asked questions regarding hardware, program development and debugging tools.

Topic	Page
A.1 Hardware .....	19
A.2 Program Development (Assembler, C-Compiler, Linker, IDE) .....	19
A.3 Debugging .....	20

## A.1 Hardware

For a complete list of hardware related FAQs, see the *MSP430 Hardware Tools User's Guide* [SLAU278](#).

## A.2 Program Development (Assembler, C-Compiler, Linker, IDE)

---

### NOTE: Consider the CCS Release Notes

For the case of unexpected behavior, see the CCS Release Notes document for known bugs and limitations of the current CCS version. This information can be accessed through the menu item Start → All Programs → Texas Instruments → Code Composer Studio → Release Notes.

---

1. **A common MSP430 "mistake" is to fail to disable the watchdog mechanism.** The watchdog is enabled by default, and it resets the device if not disabled or properly managed by the application. Use `WDCTL = WDTPW + WDTOLD;` to explicitly disable the Watchdog. This statement is best placed in the `_system_pre_init()` function that is executed prior to `main()`. If the Watchdog timer is not disabled, and the Watchdog triggers and resets the device during CSTARTUP, **the source screen goes blank**, as the debugger is not able to locate the source code for CSTARTUP. Be aware that CSTARTUP can take a significant amount of time to execute if a large number of initialized global variables are used.

```
int _system_pre_init(void)
{
    /* Insert your low-level initializations here */
    WDCTL = WDTPW + WDTOLD; // Stop Watchdog timer
    /*=====*/
    /* Choose if segment initialization */
    /* should be done or not.          */
    /* Return: 0 to omit initialization */
    /*          1 to run initialization */
    /*=====*/
    return (1);
}
```

2. **Within the C libraries, GIE (Global Interrupt Enable) is disabled before (and restored after) the hardware multiplier is used.**
3. **It is possible to mix assembly and C programs within CCS.** See the "Interfacing C/C++ With Assembly Language" chapter of the *MSP430 Optimizing C/C++ Compiler User's Guide* (literature number [SLAU132](#)).
4. **Constant definitions (#define) used within the .h files are effectively reserved** and include, for example, C, Z, N, and V. Do not create program variables with these names.
5. **Compiler optimization can remove unused variables and statements that have no effect** and can affect debugging. To prevent this, these variables can be declared `volatile`; for example:

```
volatile int i;
```

### A.3 Debugging

The debugger is part of CCS and can be used as a standalone application. This section is applicable when using the debugger both standalone and from the CCS IDE.

---

**NOTE: Consider the CCS release notes**

In case of unexpected behavior, see the CCS Release Notes document for known bugs and limitations of the current CCS version. To access this information, click Start → All Programs → Texas Instruments → Code Composer Studio → Release Notes.

---

1. **The debugger reports that it cannot communicate with the device.** Possible solutions to this problem include:
  - Make sure that the correct debug interface and corresponding port number have been selected in Project → Properties → General → Device → Connection.
  - Make sure that the jumper settings are configured correctly on the target hardware.
  - Make sure that no other software application (for example, a printer driver) has reserved or taken control of the COM or parallel port, which would prevent the debug server from communicating with the device.
  - Open the Device Manager and determine if the driver for the FET tool has been correctly installed and if the COM or parallel port is successfully recognized by the Windows OS. Check the PC BIOS for the parallel port settings (see FAQ [Debugging #5](#)). For users of IBM or Lenovo ThinkPad® computers, try port setting LPT2 and LPT3, even if operating system reports that the parallel port is located at LPT1.
  - Restart the computer.

Make sure that the MSP430 device is securely seated in the socket (so that the "fingers" of the socket completely engage the pins of the device), and that its pin 1 (indicated with a circular indentation on the top surface) aligns with the "1" mark on the PCB.

**CAUTION**

**Possible Damage To Device**

Always handle MSP430 devices with a vacuum pick-up tool only; do not use your fingers, as you can easily bend the device pins and render the device useless. Also, always observe and follow proper ESD precautions.

2. **The debugger can debug applications that use interrupts and low-power modes.** See FAQ [Debugging #17](#)).
3. **The debugger cannot access the device registers and memory while the device is running.** The user must stop the device to access device registers and memory.
4. **The debugger reports that the device JTAG security fuse is blown.** With current MSP430-FET430UIF JTAG interface tools, there is a weakness when adapting target boards that are powered externally. This leads to an accidental fuse check in the MSP430 and results in the JTAG security fuse being recognized as blown although it is not.
 

Workarounds:

  - Connect the device  $\overline{\text{RST}}/\text{NMI}$  pin to JTAG header (pin 11), MSP-FET430UIF interface tools are able to pull the  $\overline{\text{RST}}$  line, this also resets the device internal fuse logic.
  - Do not connect both  $V_{\text{CC}}$  Tool (pin 2) and  $V_{\text{CC}}$  Target (pin 4) of the JTAG header. Specify a value for  $V_{\text{CC}}$  in the debugger that is equal to the external supply voltage.
5. **The parallel port designators (LPTx) have the following physical addresses: LPT1 = 378h, LPT2 = 278h, LPT3 = 3BCh.** The configuration of the parallel port (ECP, Compatible, Bidirectional, Normal) is not significant; ECP seems to work well. See FAQ [Debugging #1](#) for additional hints on solving communication problems between the debugger and the device.

6. **The debugger asserts  $\overline{\text{RST/NMI}}$  to reset the device** when the debugger is started and when the device is programmed. The device is also reset by the debugger Reset button, and when the device is manually reprogrammed (using Reload), and when the JTAG is resynchronized (using Resynchronize JTAG). When  $\overline{\text{RST/NMI}}$  is not asserted (low), the debugger sets the logic driving  $\overline{\text{RST/NMI}}$  to high impedance, and  $\overline{\text{RST/NMI}}$  is pulled high via a resistor on the PCB.  
 $\overline{\text{RST/NMI}}$  is asserted and negated after power is applied when the debugger is started.  $\overline{\text{RST/NMI}}$  is then asserted and negated a second time after device initialization is complete.
7. **The debugger can debug a device whose program reconfigures the function of the  $\overline{\text{RST/NMI}}$  pin to NMI.**
8. **The level of the XOUT/TCLK pin is undefined when the debugger resets the device.** The logic driving XOUT/TCLK is set to high impedance at all other times.
9. **When making current measurements of the device, ensure that the JTAG control signals are released**, otherwise the device is powered by the signals on the JTAG pins and the measurements are erroneous. See FAQ [Debugging #10](#).
10. **When the debugger has control of the device, the CPU is on** (that is, it is not in low-power mode) regardless of the settings of the low-power mode bits in the status register. Any low-power mode condition is restored prior to STEP or GO. Consequently, do not measure the power consumed by the device while the debugger has control of the device. Instead, run the application using Release JTAG on run.
11. The MEMORY window correctly displays the contents of memory where it is present. However, **the MEMORY window incorrectly displays the contents of memory where there is none present.** Memory should be used only in the address ranges as specified by the device data sheet.
12. The debugger uses the system clock to control the device during debugging. Therefore, **device counters and other components that are clocked by the Main System Clock (MCLK) are affected when the debugger has control of the device.** Special precautions are taken to minimize the effect upon the watchdog timer. The CPU core registers are preserved. All other clock sources (SMCLK and ACLK) and peripherals continue to operate normally during emulation. In other words, **the Flash Emulation Tool is a partially intrusive tool.**  
 Devices that support clock control can further minimize these effects by stopping the clock(s) during debugging (Project → Properties → CCS Debug Settings → Target → Clock Control).
13. When programming the flash, **do not set a breakpoint on the instruction immediately following the write to flash operation.** A simple work-around to this limitation is to follow the write to flash operation with a NOP and to set a breakpoint on the instruction following the NOP.
14. Multiple internal machine cycles are required to clear and program the flash memory. **When single stepping over instructions that manipulate the flash**, control is given back to the debugger before these operations are complete. Consequently, **the debugger updates its memory window with erroneous information.** A workaround for this behavior is to follow the flash access instruction with a NOP and then step past the NOP before reviewing the effects of the flash access instruction.
15. **Bits that are cleared when read during normal program execution** (that is, interrupt flags) **are cleared when read while being debugged** (that is, memory dump, peripheral registers).  
 Using certain MSP430 devices with enhanced emulation logic such as MSP430F43x and MSP430F44x devices, bits do not behave this way (that is, the bits are not cleared by the debugger read operations).
16. **The debugger cannot be used to debug programs that execute in the RAM of F12x and F41x devices.** A workaround for this limitation is to debug programs in flash.
17. **While single stepping with active and enabled interrupts, it can appear that only the interrupt service routine (ISR) is active** (that is, the non-ISR code never appears to execute, and the single step operation stops on the first line of the ISR). However, this behavior is correct because the device processes an active and enabled interrupt before processing non-ISR (that is, mainline) code. A workaround for this behavior is, while within the ISR, to disable the GIE bit on the stack, so that interrupts are disabled after exiting the ISR. This permits the non-ISR code to be debugged (but without interrupts). Interrupts can later be re-enabled by setting GIE in the status register in the Register window.  
 On devices with Clock Control, it may be possible to suspend a clock between single steps and delay an interrupt request (Project → Properties → CCS Debug Settings → Target → Clock Control).

18. On devices equipped with a Data Transfer Controller (DTC), **the completion of a data transfer cycle preempts a single step of a low-power mode instruction.** The device advances beyond the low-power mode instruction only after an interrupt is processed. Until an interrupt is processed, it appears that the single step has no effect. A workaround to this situation is to set a breakpoint on the instruction following the low-power mode instruction, and then execute (Run) to this breakpoint.
19. **The transfer of data by the Data Transfer Controller (DTC) may not stop precisely when the DTC is stopped in response to a single step or a breakpoint.** When the DTC is enabled and a single step is performed, one or more bytes of data can be transferred. When the DTC is enabled and configured for two-block transfer mode, the DTC may not stop precisely on a block boundary when stopped in response to a single step or a breakpoint.
20. **Breakpoints.** CCS supports a number of predefined breakpoint and watchpoint types. See [Section 2.2.2](#) for a detailed overview.

## Migration of C Code from IAR 2.x, 3.x, or 4.x to CCS

---

---

Source code for the TI CCS C compiler and source code for the IAR Embedded Workbench C compiler are not fully compatible. Standard ANSI/ISO C code is portable between these tools, but implementation-specific extensions differ and must be ported. This appendix describes the major differences between the two compilers.

Topic	Page
<b>B.1</b> Interrupt Vector Definition .....	<b>24</b>
<b>B.2</b> Intrinsic Functions .....	<b>24</b>
<b>B.3</b> Data and Function Placement .....	<b>24</b>
<b>B.4</b> C Calling Conventions .....	<b>26</b>
<b>B.5</b> Other Differences .....	<b>26</b>

## B.1 Interrupt Vector Definition

IAR ISR declarations (using the #pragma vector = ) are now fully supported in CCS. However, this is not the case for all other IAR pragma directives.

## B.2 Intrinsic Functions

CCS and IAR tools use the same instructions for MSP430 processor-specific intrinsic functions.

## B.3 Data and Function Placement

### B.3.1 Data Placement at an Absolute Location

The scheme implemented in the IAR compiler using either the @ operator or the #pragma location directive is not supported with the CCS compiler:

```
/* IAR C Code */
__no_init char alpha @ 0x0200; /* Place 'alpha' at address 0x200 */
#pragma location = 0x0202
const int beta;
```

If absolute data placement is needed, this can be achieved with entries into the linker command file, and then declaring the variables as extern in the C code:

```
/* CCS Linker Command File Entry */
alpha = 0x200;
beta = 0x202;
/* CCS C Code */
extern char alpha;
extern int beta;
```

The absolute RAM locations must be excluded from the RAM segment; otherwise, their content may be overwritten as the linker dynamically allocates addresses. The start address and length of the RAM block must be modified within the linker command file. For the previous example, the RAM start address must be shifted 4 bytes from 0x0200 to 0x0204, which reduces the length from 0x0080 to 0x007C (for an MSP430 device with 128 bytes of RAM):

```
/* CCS Linker Command File Entry */
/*****
/* SPECIFY THE SYSTEM MEMORY MAP */
/*****
MEMORY /* assuming a device with 128 bytes of RAM */
{
...
RAM :origin = 0x0204, length = 0x007C /* was: origin = 0x200, length = 0x0080 */
...
}
```

The definitions of the peripheral register map in the linker command files (lnk\_msp430xxx.cmd) and the device-specific header files (msp430xxx.h) that are supplied with CCS are an example of placing data at absolute locations.

---

**NOTE:** When a project is created, CCS copies the linker command file corresponding to the selected MSP430 derivative from the include directory (<Installation Root>\ccsv5\ccs\_base\tools\compiler\MSP430\include) into the project directory. Therefore, ensure that all linker command file changes are done in the project directory. This allows the use of project-specific linker command files for different projects using the same device.

---

### B.3.2 Data Placement Into Named Segments

In IAR, it is possible to place variables into named segments using either the @ operator or a #pragma directive:

```
/* IAR C Code */
__no_init int alpha @ "MYSEGMENT"; /* Place 'alpha' into 'MYSEGMENT' */
#pragma location="MYSEGMENT"      /* Place 'beta' into 'MYSEGMENT' */
const int beta;
```

With the CCS compiler, the #pragma DATA\_SECTION() directive must be used:

```
/* CCS C Code */

#pragma LOCATION(alpha, "MYSEGMENT")
int alpha;

#pragma LOCATION(beta, "MYSEGMENT")
int beta;
```

See [Section B.5.3](#) for information on how to translate memory segment names between IAR and CCS.

### B.3.3 Function Placement Into Named Segments

With the IAR compiler, functions can be placed into a named segment using the @ operator or the #pragma location directive:

```
/* IAR C Code */
void g(void) @ "MYSEGMENT"
{
}
#pragma location="MYSEGMENT"
void h(void)
{
}
```

With the CCS compiler, the following scheme with the #pragma CODE\_SECTION() directive must be used:

```
/* CCS C Code */
#pragma CODE_SECTION(g, "MYSEGMENT")
void g(void)
{
}
```

See [Section B.5.3](#) for information on how to translate memory segment names between IAR and CCS.

## B.4 C Calling Conventions

The CCS and IAR C-compilers use different calling conventions for passing parameters to functions. When porting a mixed C and assembly project to the TI CCS code generation tools, the assembly functions need to be modified to reflect these changes. For detailed information about the calling conventions, see the *TI MSP430 Optimizing C/C++ Compiler User's Guide* ([SLAU132](#)) and the *IAR MSP430 C/C++ Compiler Reference Guide*.

The following example is a function that writes the 32-bit word `Data` to a given memory location in big-endian byte order. It can be seen that the parameter `Data` is passed using different CPU registers.

IAR Version:

```

;-----
; void WriteDWBE(unsigned char *Add, unsigned long Data)
;
; Writes a DWORD to the given memory location in big-endian format. The
; memory address MUST be word-aligned.
;
; IN:  R12   Address      (Add)
;      R14   Lower Word   (Data)
;      R15   Upper Word   (Data)
;-----
WriteDWBE
    swpb    R14           ; Swap bytes in lower word
    swpb    R15           ; Swap bytes in upper word
    mov.w   R15,0(R12)    ; Write 1st word to memory
    mov.w   R14,2(R12)    ; Write 2nd word to memory
    ret

```

CCS Version:

```

;-----
; void WriteDWBE(unsigned char *Add, unsigned long Data)
;
; Writes a DWORD to the given memory location in big-endian format. The
; memory address MUST be word-aligned.
;
; IN:  R12   Address      (Add)
;      R13   Lower Word   (Data)
;      R14   Upper Word   (Data)
;-----
WriteDWBE
    swpb    R13           ; Swap bytes in lower word
    swpb    R14           ; Swap bytes in upper word
    mov.w   R14,0(R12)    ; Write 1st word to memory
    mov.w   R13,2(R12)    ; Write 2nd word to memory
    ret

```

## B.5 Other Differences

### B.5.1 Initializing Static and Global Variables

The ANSI/ISO C standard specifies that static and global (extern) variables without explicit initializations must be pre-initialized to 0 (before the program begins running). This task is typically performed when the program is loaded and is implemented in the IAR compiler:

```

/* IAR, global variable, initialized to 0 upon program start */
int Counter;

```

However, the TI CCS compiler does not pre-initialize these variables; therefore, it is up to the application to fulfill this requirement:

```

/* CCS, global variable, manually zero-initialized */
int Counter = 0;

```

## B.5.2 Custom Boot Routine

With the IAR compiler, the C startup function can be customized, giving the application a chance to perform early initializations such as configuring peripherals, or omit data segment initialization. This is achieved by providing a customized `__low_level_init()` function:

```
/* IAR C Code */
int __low_level_init(void)
{
    =
    /* Insert your low-level initializations here */
    /*===== */
    /* Choose if segment initialization */
    /* should be done or not. */
    /* Return: 0 to omit initialization */
    /*          1 to run initialization */
    /*===== */
    return (1);
}
```

The return value controls whether or not data segments are initialized by the C startup code. With the CCS C compiler, the custom boot routine name is `_system_pre_init()`. It is used the same way as in the IAR compiler.

```
/* CCS C Code */
int _system_pre_init(void)
{
    /* Insert your low-level initializations here */
    /*===== */
    /* Choose if segment initialization */
    /* should be done or not. */
    /* Return: 0 to omit initialization */
    /*          1 to run initialization */
    /*===== */
    return (1);
}
```

Note that omitting segment initialization with both compilers omits both explicit and non-explicit initialization. The user must ensure that important variables are initialized at run time before they are used.

## B.5.3 Predefined Memory Segment Names

Memory segment names for data and function placement are controlled by device-specific linker command files in both CCS and IAR tools. However, different segment names are used. See the linker command files for more detailed information. The following table shows how to convert the most commonly used segment names.

Description	CCS Segment Name	IAR Segment Name
RAM	.bss	DATA16_N DATA16_I DATA16_Z
Stack (RAM)	.stack	CSTACK
Main memory (flash or ROM)	.text	CODE
Information memory (flash or ROM)	.infoA .infoB	INFOA INFOB INFO
Interrupt vectors (flash or ROM)	.int00 .int01 ... .int14	INTVEC
Reset vector (flash or ROM)	.reset	RESET

### **B.5.4 Predefined Macro Names**

Both IAR and CCS compilers support a few non ANSI/ISO standard predefined macro names, which help creating code that can be compiled and used on different compiler platforms. Check if a macro name is defined using the `#ifdef` directive.

<b>Description</b>	<b>CCS Macro Name</b>	<b>IAR Macro Name</b>
Is MSP430 the target and is a particular compiler platform used?	<code>__MSP430__</code>	<code>__ICC430__</code>
Is a particular compiler platform used?	<code>__TI_COMPILER_VERSION__</code>	<code>__IAR_SYSTEMS_ICC__</code>
Is a C header file included from within assembly source code?	<code>__ASM_HEADER__</code>	<code>__IAR_SYSTEMS_ASM__</code>

## **Migration of Assembler Code from IAR 2.x, 3.x, or 4.x to CCS**

---

---

---

Source for the TI CCS assembler and source code for the IAR assembler are not 100% compatible. The instruction mnemonics are identical, but the assembler directives are somewhat different. This appendix describes the differences between the CCS assembler directives and the IAR assembler directives.

<b>Topic</b>	<b>Page</b>
<b>C.1 Sharing C/C++ Header Files With Assembly Source .....</b>	<b>30</b>
<b>C.2 Segment Control .....</b>	<b>30</b>
<b>C.3 Translating A430 Assembler Directives to Asm430 Directives .....</b>	<b>31</b>

## C.1 Sharing C/C++ Header Files With Assembly Source

The IAR A430 assembler supports certain C/C++ preprocessor directives directly and, thereby, allows direct including of C/C++ header files such as the MSP430 device-specific header files (msp430xxxx.h) into the assembly code:

```
#include "msp430x14x.h" // Include device header file
```

With the CCS Asm430 assembler, a different scheme that uses the .cdecls directive must be used. This directive allows programmers in mixed assembly and C/C++ environments to share C/C++ headers containing declarations and prototypes between the C/C++ and assembly code:

```
.cdecls C,LIST,"msp430x14x.h" ; Include device header file
```

More information on the .cdecls directive can be found in the *MSP430 Assembly Language Tools User's Guide* (literature number [SLAU131](#)).

## C.2 Segment Control

The CCS Asm430 assembler does not support any of the IAR A430 segment control directives such as ORG, ASEG, RSEG, and COMMON.

Description	Asm430 Directive (CCS)
Reserve space in the .bss uninitialized section	.bss
Reserve space in a named uninitialized section	.usect
Allocate program into the default program section (initialized)	.text
Allocate data into a named initialized section	.sect

To allocate code and data sections to specific addresses with the CCS assembler, it is necessary to create and use memory sections defined in the linker command files. The following example demonstrates interrupt vector assignment in both IAR and CCS assembly to highlight the differences.

```

;-----
; Interrupt Vectors Used MSP430x11x1 and 12x(2) - IAR Assembler
;-----
    ORG    0FFFFh    ; MSP430 RESET Vector
    DW    RESET      ;
    ORG    0FFF2h    ; Timer_A0 Vector
    DW    TA0_ISR    ;
;-----
Interrupt Vectors Used MSP430x11x1 and 12x(2) - CCS Assembler
;-----
    .sect  ".reset"   ; MSP430 RESET Vector
    .short RESET      ;
    .sect  ".int09"   ; Timer_A0 Vector
    .short TA0_ISR    ;
    
```

Both examples assume that the standard device support files (header files, linker command files) are used. Note that the linker command files are different between IAR and CCS and cannot be reused. See [Section B.5.3](#) for information on how to translate memory segment names between IAR and CCS.

## C.3 Translating A430 Assembler Directives to Asm430 Directives

### C.3.1 Introduction

The following sections describe, in general, how to convert assembler directives for the IAR A430 assembler (A430) to Texas Instruments CCS Asm430 assembler (Asm430) directives. These sections are intended only as a guide for translation. For detailed descriptions of each directive, see either the *MSP430 Assembly Language Tools User's Guide* ([SLAU131](#)) from Texas Instruments or the *MSP430 IAR Assembler Reference Guide* from IAR.

---

**NOTE: Only the assembler *directives* require conversion**

Only the assembler directives require conversion, not the assembler instructions. Both assemblers use the same instruction mnemonics, operands, operators, and special symbols such as the section program counter (\$) and the comment delimiter (;).

---

The A430 assembler is not case sensitive by default. These sections show the A430 directives written in uppercase to distinguish them from the Asm430 directives, which are shown in lower case.

### C.3.2 Character Strings

In addition to using different directives, each assembler uses different syntax for character strings. A430 uses C syntax for character strings: A quote is represented using the backslash character as an escape character together with quote (\") and the backslash itself is represented by two consecutive backslashes (\\). In Asm430 syntax, a quote is represented by two consecutive quotes ("); see examples:

Character String	Asm430 Syntax (CCS)	A430 Syntax (IAR)
PLAN "C"	"PLAN ""C"""	"PLAN \"C\""
\\dos\\command.com	"\\dos\\command.com"	"\\dos\\command.com"
Concatenated string (for example, Error 41)	-	"Error " "41"

### C.3.3 Section Control Directives

Asm430 has three predefined sections into which various parts of a program are assembled. Uninitialized data is assembled into the .bss section, initialized data into the .data section, and executable code into the .text section.

A430 also uses sections or segments, but there are no predefined segment names. Often, it is convenient to adhere to the names used by the C compiler: DATA16\_Z for uninitialized data, CONST for constant (initialized) data, and CODE for executable code. The following table uses these names.

A pair of segments can be used to make initialized, modifiable data PROM-able. The ROM segment would contain the initializers and would be copied to RAM segment by a start-up routine. In this case, the segments must be exactly the same size and layout.

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Reserve size bytes in the .bss (uninitialized data) section	.bss <sup>(1)</sup>	<sup>(2)</sup>
Assemble into the .data (initialized data) section	.data	RSEG const
Assemble into a named (initialized) section	.sect	RSEG
Assemble into the .text (executable code) section	.text	RSEG code
Reserve space in a named (uninitialized) section	.usect <sup>(1)</sup>	<sup>(2)</sup>
Alignment on byte boundary	.align 1	<sup>(3)</sup>
Alignment on word boundary	.align 2	EVEN

<sup>(1)</sup> .bss and .usect do not require switching back and forth between the original and the uninitialized section. For example:

```

; IAR Assembler Example
        RSEG    DATA16_N    ; Switch to    DATA segment
        EVEN    ; Ensure proper alignment
ADCResult: DS    2          ; Allocate 1    word in RAM
Flags:    DS    1          ; Allocate 1    byte in RAM
        RSEG    CODE        ; Switch back   to CODE segment
; CCS Assembler Example #1
ADCResult .usect ".bss",2,2 ; Allocate 1    word in RAM
Flags     .usect ".bss",1   ; Allocate 1    byte in RAM
; CCS Assembler Example #2
        .bss    ADCResult,2,2 ; Allocate 1    word in RAM
        .bss    Flags,1     ; Allocate 1    byte in RAM
    
```

<sup>(2)</sup> Space is reserved in an uninitialized segment by first switching to that segment, then defining the appropriate memory block, and then switching back to the original segment. For example:

```

        RSEG    DATA16_Z
LABEL:   DS    16          ; Reserve 16    byte
        RSEG    CODE
    
```

<sup>(3)</sup> Initialization of bit-field constants (.field) is not supported, therefore, the section counter is always byte-aligned.

### C.3.4 Constant Initialization Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Initialize one or more successive bytes or text strings	.byte or .string	DB
Initialize a 32-bit IEEE floating-point constant	.double or .float	DF
Initialize a variable-length field	.field	<sup>(1)</sup>
Reserve size bytes in the current section	.space	DS
Initialize one or more text strings	Initialize one or more text strings	DB
Initialize one or more 16-bit integers	.word	DW
Initialize one or more 32-bit integers	.long	DL

<sup>(1)</sup> Initialization of bit-field constants (.field) is not supported. Constants must be combined into complete words using DW.

```

; Asm430 code                ; A430 code
.field 5,3 \
.field 12,4 | ->            DW    (30<<(4+3))|(12<<3)|5 ; equals 3941
.field 30,8 /
    
```

### C.3.5 Listing Control Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Allow false conditional code block listing	.fclist	LSTCND-
Inhibit false conditional code block listing	.fcnolist	LSTCND+
Set the page length of the source listing	.length	PAGSIZ
Set the page width of the source listing	.width	COL
Restart the source listing	.list	LSTOUT+
Stop the source listing	.nolist	LSTOUT-
Allow macro listings and loop blocks	.mlist	LSTEXP+ (macro) LSTREP+ (loop blocks)
Inhibit macro listings and loop blocks	.mnolist	LSTEXP- (macro) LSTREP- (loop blocks)
Select output listing options	.option	(1)
Eject a page in the source listing	.page	PAGE
Allow expanded substitution symbol listing	.sslist	(2)
Inhibit expanded substitution symbol listing	.ssnolist	(2)
Print a title in the listing page header	.title	(3)

(1) No A430 directive directly corresponds to .option. The individual listing control directives (above) or the command-line option -c (with suboptions) should be used to replace the .option directive.

(2) There is no directive that directly corresponds to .sslist and .ssnolist.

(3) The title in the listing page header is the source file name.

### C.3.6 File Reference Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Include source statements from another file	.copy or .include	#include or \$
Identify one or more symbols that are defined in the current module and used in other modules	.def	PUBLIC or EXPORT
Identify one or more global (external) symbols	.global	(1)
Define a macro library	.mlib	(2)
Identify one or more symbols that are used in the current module but defined in another module	.ref	EXTERN or IMPORT

(1) The directive .global functions as either .def if the symbol is defined in the current module, or .ref otherwise. PUBLIC or EXTERN must be used as applicable with the A430 assembler to replace the .global directive.

(2) The concept of macro libraries is not supported. Include files with macro definitions must be used for this functionality.

Modules may be used with the Asm430 assembler to create individually linkable routines. A file may contain multiple modules or routines. All symbols except those created by DEFINE, #define (IAR preprocessor directive) or MACRO are "undefined" at module end. Library modules are, furthermore, linked conditionally. This means that a library module is included in the linked executable only if a public symbol in the module is referenced externally. The following directives are used to mark the beginning and end of modules in the A430 assembler.

Additional A430 Directives (IAR)	A430 Directive (IAR)
Start a program module	NAME or PROGRAM
Start a library module	MODULE or LIBRARY
Terminate the current program or library module	ENDMOD

### C.3.7 Conditional Assembly Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Optional repeatable block assembly	.break	<sup>(1)</sup>
Begin conditional assembly	.if	IF
Optional conditional assembly	.else	ELSE
Optional conditional assembly	.elseif	ELSEIF
End conditional assembly	.endif	ENDIF
End repeatable block assembly	.endloop	ENDR
Begin repeatable block assembly	.loop	REPT

<sup>(1)</sup> There is no directive that directly corresponds to .break. However, the EXITM directive can be used with other conditionals if repeatable block assembly is used in a macro, as shown:

```

SEQ  MACRO  FROM,TO      ; Initialize a sequence      of byte constants
      LOCAL X
X     SET   FROM
      REPT  TO-FROM+1    ; Repeat from FROM to      TO
      IF   X>255        ; Break if X exceeds      255
      EXITM
      ENDF
      DB   X            ; Initialize bytes to      FROM...TO
X     SET   X+1         ; Increment      counter
      ENDR
      ENDM
    
```

### C.3.8 Symbol Control Directives

The scope of assembly-time symbols differs in the two assemblers. In Asm430, definitions can be global to a file or local to a module or macro. Local symbols can be undefined with the .newblock directive. In A430, symbols are either local to a macro (LOCAL), local to a module (EQU), or global to a file (DEFINE). In addition, the preprocessor directive #define also can be used to define local symbols.

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Assign a character string to a substitution symbol	.asg	SET or VAR or ASSIGN
Undefine local symbols	.newblock	<sup>(1)</sup>
Equate a value with a symbol	.equ or .set	EQU or =
Perform arithmetic on numeric substitution symbols	.eval	SET or VAR or ASSIGN
End structure definition	.endstruct	<sup>(2)</sup>
Begin a structure definition	.struct	<sup>(2)</sup>
Assign structure attributes to a label	.tag	<sup>(2)</sup>

<sup>(1)</sup> No A430 directive directly corresponds to .newblock. However, #undef may be used to reset a symbol that was defined with the #define directive. Also, macros or modules may be used to achieve the .newblock functionality because local symbols are implicitly undefined at the end of a macro or module.

<sup>(2)</sup> Definition of structure types is not supported. Similar functionality is achieved by using macros to allocate aggregate data and base address plus symbolic offset, as shown:

```

MYSTRUCT: MACRO
          DS 4
          ENDM
LO       DEFINE 0
HI       DEFINE 2
          RSEG DATA16_Z
X        MYSTRUCT
          RSEG CODE
          MOV  X+LO,R4
          ...
    
```

### C.3.9 Macro Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Define a macro	.macro	MACRO
Exit prematurely from a macro	.mexit	EXITM
End macro definition	.endm	ENDM

### C.3.10 Miscellaneous Directives

Description	Asm430 Directive (CCS)	A430 Directive (IAR)
Send user-defined error messages to the output device	.emsg	#error
Send user-defined messages to the output device	.mmsg	#message <sup>(1)</sup>
Send user-defined warning messages to the output device	.wmsg	<sup>(2)</sup>
Define a load address label	.label	<sup>(3)</sup>
Directive produced by absolute lister	.setsect	ASEG <sup>(4)</sup>
Directive produced by absolute lister	.setsym	EQU or = <sup>(4)</sup>
Program end	.end	END

<sup>(1)</sup> The syntax of the #message directive is: #message "<string>"

This causes '#message <string>' to be output to the project build window during assemble and compile time.

<sup>(2)</sup> Warning messages cannot be user-defined. #message may be used, but the warning counter is not incremented.

<sup>(3)</sup> The concept of load-time addresses is not supported. Run-time and load-time addresses are assumed to be the same. To achieve the same effect, labels can be given absolute (run-time) addresses by the EQU directives.

```

; Asm430 code          ; A430 code
.label load_start     load_start:
Run_start:            <code>
    <code>             load_end:
Run_end:              run_start: EQU 240H
.label load_end       run_end:   EQU run_start+load_end-load_start
  
```

<sup>(4)</sup> Although not produced by the absolute lister, ASEG defines absolute segments and EQU can be used to define absolute symbols.

```

MYFLAG    EQU    23EH        ; MYFLAG is located at    23E
          ASEG    240H        ; Absolute segment at    240
MAIN:     MOV    #23CH, SP    ; MAIN is located at    240
...
  
```

### C.3.11 Alphabetical Listing and Cross Reference of Asm430 Directives

Asm430 Directive (CCS)	A430 Directive (IAR)	Asm430 Directive (CCS)	A430 Directive (IAR)
.align	ALIGN	.loop	REPT
.asg	SET or VAR or ASSIGN	.macro	MACRO
.break	See <a href="#">Conditional Assembly Directives</a>	.mexit	EXITM
.bss	See <a href="#">Symbol Control Directives</a>	.mlib	See <a href="#">File Referencing Directives</a>
.byte or .string	DB	.mlist	LSTEXP+ (macro)
.cdecls	C pre-processor declarations are inherently supported.		LSTREP+ (loop blocks)
.copy or .include	#include or \$	.mmsg	#message (XXXXXX)
.data	RSEG	.mnolist	LSTEXP- (macro)
.def	PUBLIC or EXPORT		LSTREP- (loop blocks)
.double	Not supported	.newblock	See <a href="#">Symbol Control Directives</a>
.else	ELSE	.nolist	LSTOUT-
.elseif	ELSEIF	.option	See <a href="#">Listing Control Directives</a>
.emsg	#error	.page	PAGE
.end	END	.ref	EXTERN or IMPORT
.endif	ENDIF	.sect	RSEG
.endloop	ENDR	.setsect	See <a href="#">Miscellaneous Directives</a>
.endm	ENDM	.setsym	See <a href="#">Miscellaneous Directives</a>
.endstruct	See <a href="#">Symbol Control Directives</a>	.space	DS
.equ or .set	EQU or =	.sslist	Not supported
.eval	SET or VAR or ASSIGN	.ssnolist	Not supported
.even	EVEN	.string	DB
.fclist	LSTCND-	.struct	See <a href="#">Symbol Control Directives</a>
.fcnolist	LSTCND+	.tag	See <a href="#">Symbol Control Directives</a>
.field	See <a href="#">Constant Initialization Directives</a>	.text	RSEG
.float	See <a href="#">Constant Initialization Directives</a>	.title	See <a href="#">Listing Control Directives</a>
.global	See <a href="#">File Referencing Directives</a>	.usect	See <a href="#">Symbol Control Directives</a>
.if	IF	.width	COL
.label	See <a href="#">Miscellaneous Directives</a>	.wmsg	See <a href="#">Miscellaneous Directives</a>
.length	PAGSIZ	.word	DW
.list	LSTOUT+		

### C.3.12 Unsupported A430 Directives (IAR)

The following IAR assembler directives are not supported in the CCS Asm430 assembler:

Conditional Assembly Directives	Macro Directives	
REPTC <sup>(1)</sup>	LOCAL <sup>(2)</sup>	
REPTI		
File Referencing Directives	Miscellaneous Directives	Symbol Control Directives
NAME or PROGRAM	RADIX	DEFINE
MODULE or LIBRARY	CASEON	SFRB
ENDMOD	CASEOFF	SFRW
Listing Control Directives	C-Style Preprocessor Directives <sup>(3)</sup>	Symbol Control Directives
LSTMAC (±)	#define	ASEG
LSTCOD (±)	#undef	RSEG
LSTPAG (±)	#if, #else, #elif	COMMON
LSTXREF (±)	#ifdef, #ifndef	STACK
	#endif	ORG
	#include	
	#error	

<sup>(1)</sup> There is no direct support for IAR REPTC and REPTI directives in CCS. However, equivalent functionality can be achieved using the CCS .macro directive:

```
; IAR Assembler Example
    REPTI    zero, "R4", "R5", "R6"
    MOV     #0, zero
    ENDR

; CCS Assembler Example
zero_regs .macro list
    .var item
    .loop
    .break ($ismember(item, list) =    0)
    MOV #0, item
    .endloop
    .endm
```

Code that is generated by calling "zero\_regs R4,R5,R6":

```
MOV #0, R4
MOV #0, R5
MOV #0, R6
```

<sup>(2)</sup> In CCS, local labels are defined by using \$n (with n=0...9) or with NAME?. Examples are \$4, \$7, or Test?.

<sup>(3)</sup> The use of C-style preprocessor directives is supported indirectly through the use of .cdecls. More information on the .cdecls directive can be found in the *MSP430 Assembly Language Tools User's Guide* (literature number [SLAU131](#)).

## ***FET-Specific Menus***

---

---

This appendix describes the CCS menus that are specific to the FET.

Topic	Page
<b>D.1 Menus .....</b>	<b>39</b>

## D.1 Menus

### D.1.1 *Debug View: Run* → *Free Run*

The debugger uses the device JTAG signals to debug the device. On some MSP430 devices, these JTAG signals are shared with the device port pins. Normally, the debugger maintains the pins in JTAG mode so that the device can be debugged. During this time, the port functionality of the shared pins is not available.

However, when Free Run is selected (by opening a pulldown menu next to the Run icon on top of the Debug View), the JTAG drivers are set to 3-state, and the device is released from JTAG control (TEST pin is set to GND) when GO is activated. Any active on-chip breakpoints are retained, and the shared JTAG port pins revert to their port functions.

At this time, the debugger has no access to the device and cannot determine if an active breakpoint (if any) has been reached. The debugger must be manually commanded to stop the device, at which time the state of the device is determined (that is, was a breakpoint reached?).

See FAQ [Debugging #9](#).

### D.1.2 *Run* → *Connect Target*

Regains control of the device when ticked.

### D.1.3 *Run* → *Advanced* → *Make Device Secure*

Blows the JTAG fuse on the target device. After the fuse is blown, no further communication via JTAG with the device is possible.

### D.1.4 *Project* → *Properties* → *Debug* → *MSP430 Properties* → *Clock Control*

Disables the specified system clock while the debugger has control of the device (following a STOP or breakpoint). All system clocks are enabled following a GO or a single step (STEP or STEP INTO). Can only be changed when the debugger is inactive. See FAQ [Debugging #12](#).

### D.1.5 *Window* → *Show View* → *Breakpoints*

Opens the MSP430 Breakpoints View window. This window can be used to set basic and advanced breakpoints. Advanced settings such as Conditional Triggers and Register Triggers can be selected individually for each breakpoint by accessing the properties (right click on corresponding breakpoint). Pre-defined breakpoints such as Break on Stack Overflow can be selected by opening the Breakpoint pulldown menu, which is located next to the Breakpoint icon at the top of the window. Breakpoints may be combined by dragging and dropping within the Breakpoint View window. A combined breakpoint is triggered when all breakpoint conditions are met.

### D.1.6 *Window* → *Show View* → *Other... Debug* → *Trace Control*

The Trace View enables the use of the state storage module. The state storage module is present only in devices that contain the full version of the Enhanced Emulation Module (EEM) (see [Table 2-1](#)). After a breakpoint is defined, the State Storage View displays the trace information as configured. Various trace modes can be selected when clicking the Configuration Properties icon at the top right corner of the window. Details on the EEM are available in the application report *Advanced Debugging Using the Enhanced Emulation Module (EEM) With CCS Version 4* ([SLAA393](#)).

### D.1.7 *Project* → *Properties* → *Debug* → *MSP430 Properties* → *Target Voltage*

The target voltage of the MSP-FET430UIF can be adjusted between 1.8 V and 3.6 V. This voltage is available on pin 2 of the 14-pin target connector to supply the target from the USB FET. If the target is supplied externally, the external supply voltage should be connected to pin 4 of the target connector, so the USB FET can set the level of the output signals accordingly. Can only be changed when the debugger is inactive.

## ***Device Specific Menus***

---

---

### **E.1 MSP430L092**

#### ***E.1.1 Emulation Modes***

The MSP430L092 can operate in two different modes: the L092 mode and C092 emulation mode. The purpose of the C092 emulation mode is to mimic a C092 with up to 1920 bytes of code at its final destination for mask generation by using an L092. The operation mode must be set in CCS before launching the debugger. The selection happens in the project properties under Device Options at the bottom, after selecting MSP430L092 as Device Variant as shown in [Figure E-1](#). [Figure E-2](#) shows how to select the C092 mode.

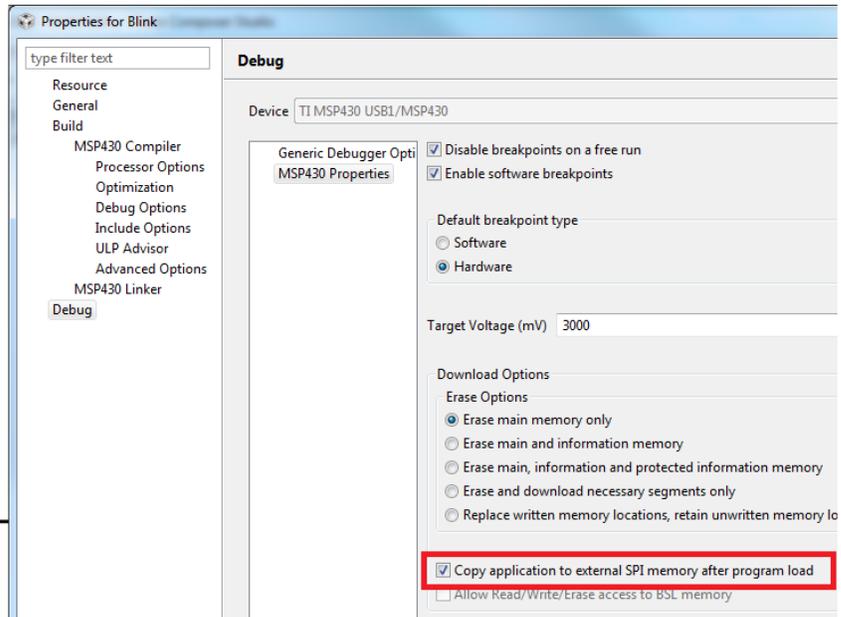
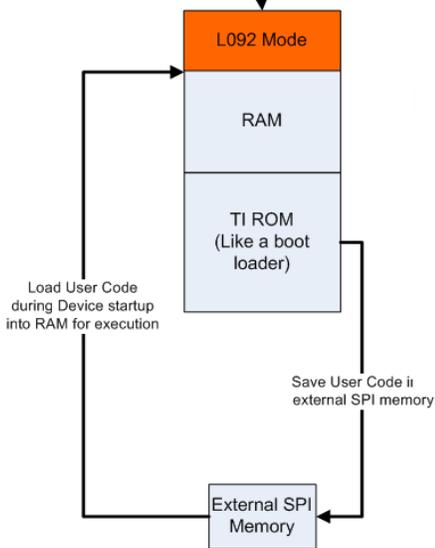
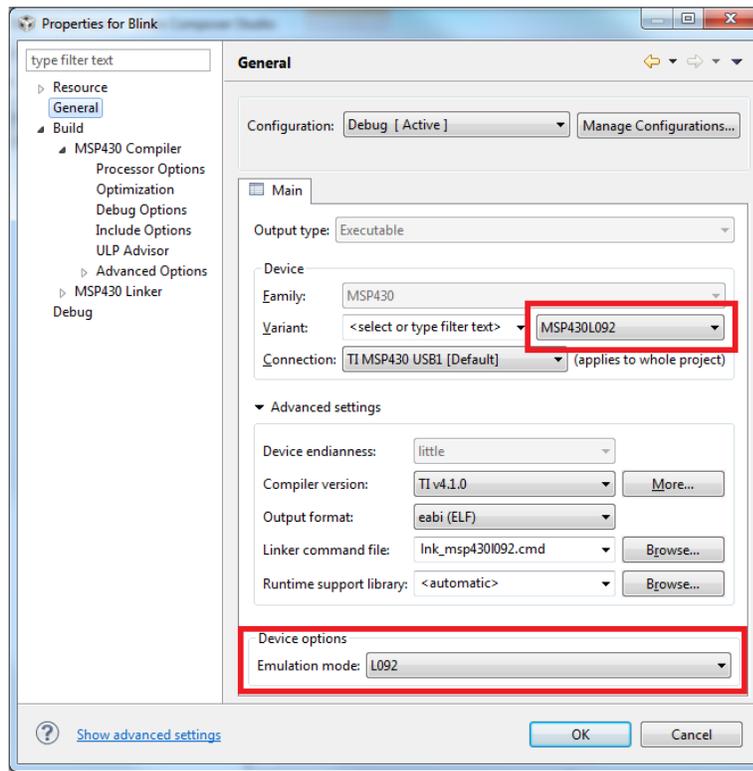


Figure E-1. MSP430L092 Modes

### E.1.2 Loader Code

The Loader Code in the MSP430L092 is a ROM-code from TI that provides a series of services. It enables customers to build autonomous applications without needing to develop a ROM mask. Such an application consists of an MSP430 device containing the loader (for example, MSP430L092) and an SPI memory device (for example, '95512 or '25640). Those and similar devices are available from various manufacturers. The majority of use cases for an application with a loader device and external SPI memory for native 0.9-V supply voltage are late development, prototyping, and small series production. The external code download may be set in the CCS Project Properties → Debug → MSP430 Properties → Download Options → Copy application to external SPI memory after program load (see [Figure E-1](#)).

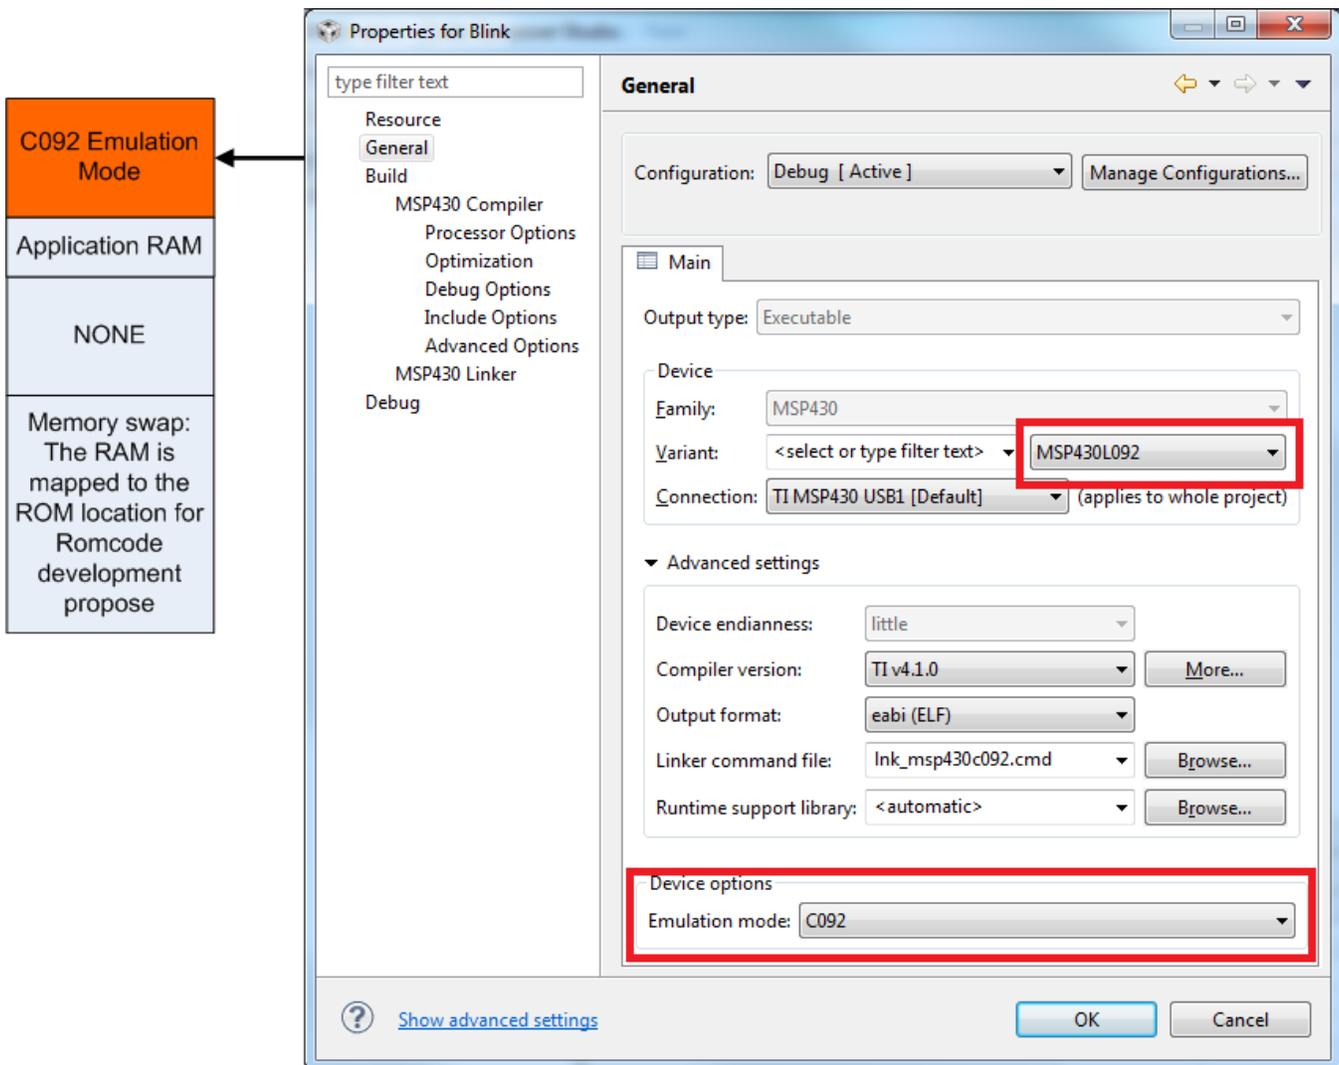


Figure E-2. MSP430L092 in C092 Emulation Mode

### E.1.3 C092 Password Protection

The MSP430C092 is a customer-specific ROM device, which is protected by a password. To start a debug session, the password must be provided to CCS. Open the MSP430C092.CCXML file in your project, click Target Configurations in the Advanced Setup section, Advanced Target Configuration. The CPU Properties become visible after MSP430 is selected. [Figure E-3](#) shows how to provide a HEX password in CCSv5.5 target configuration.

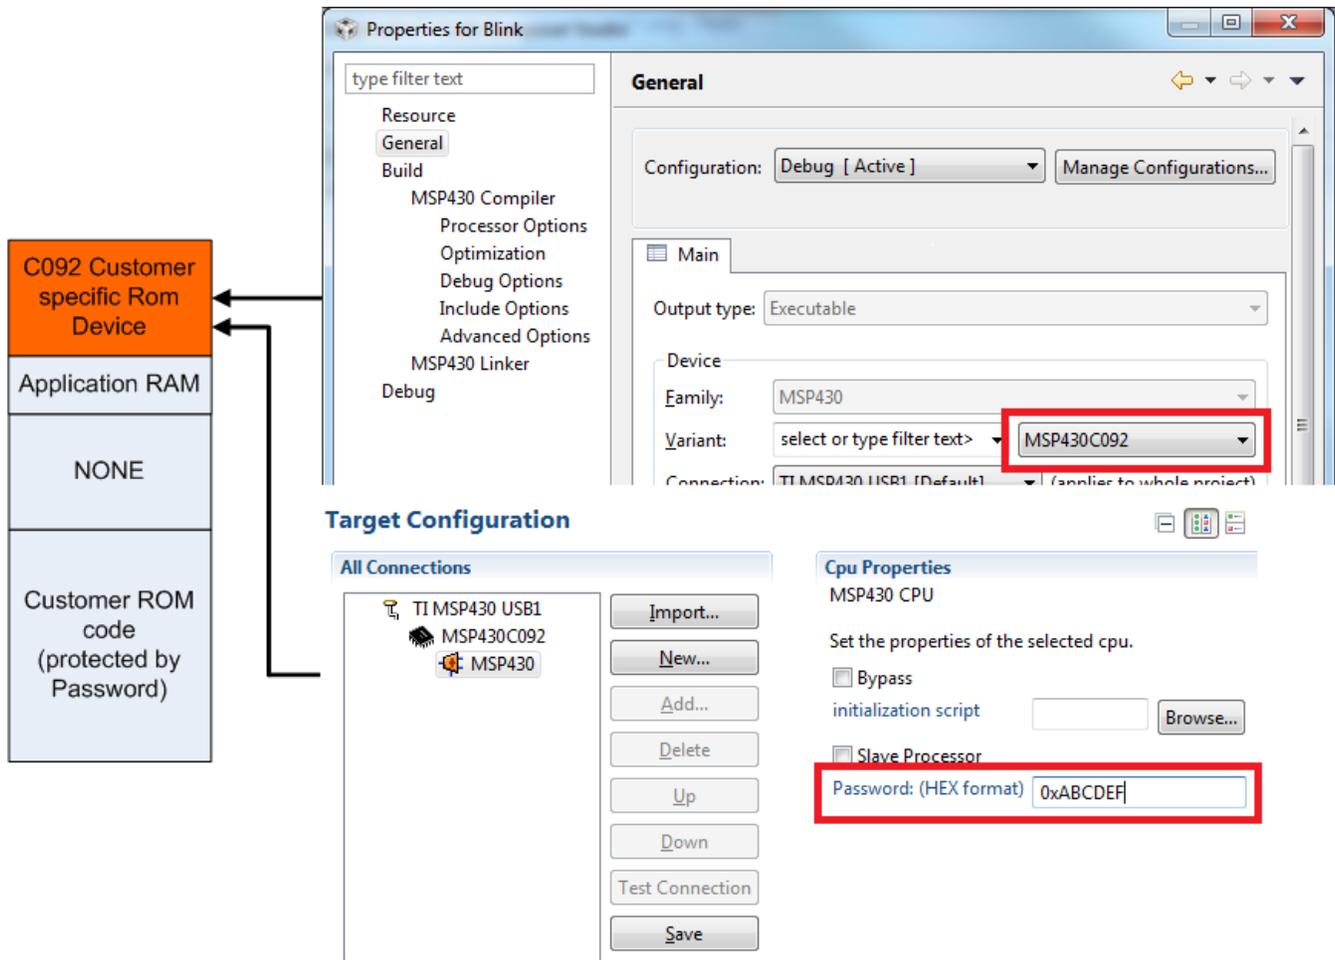


Figure E-3. MSP430C092 Password Access

## E.2 MSP430F5xx and MSP430F6xx BSL Support

Most of the MSP430F5xx and MSP430F6xx devices support a custom BSL that is protected by default. To program the custom BSL, this protection must be disabled in CCS Project Properties → Debug → MSP430 Properties → Download Options → Allow Read/Write/Erase access to BSL memory (see Figure E-4).


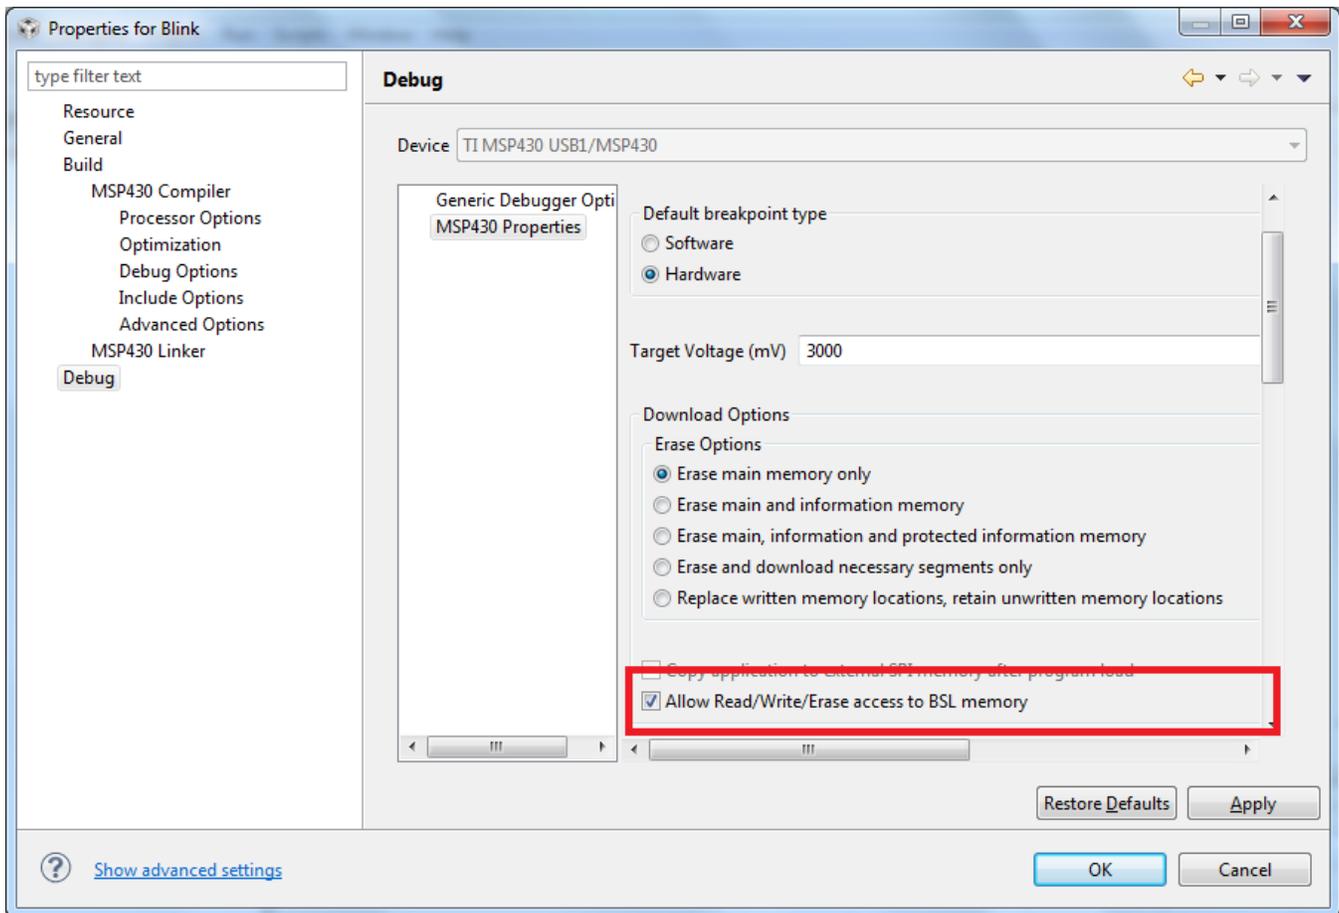


Figure E-4. Allow Access to BSL

### E.3 MSP430FR5xx and MSP430FR6xx Password Protection

Selected MSP430FR5xx and MSP430FR6xx devices provide JTAG protection by a user password. When debugging these MSP430 derivatives, the hexadecimal JTAG password must be provided to start a debug session. Open the MSP430Fxxx.CCXML file in your project, click Target Configurations in the Advanced Setup section, Advanced Target Configuration. The CPU Properties become visible after MSP430 is selected (see Figure E-5). Details regarding the password protection of MSP430FR5xx and MSP430FR6xx devices may be found in the device user's guides.

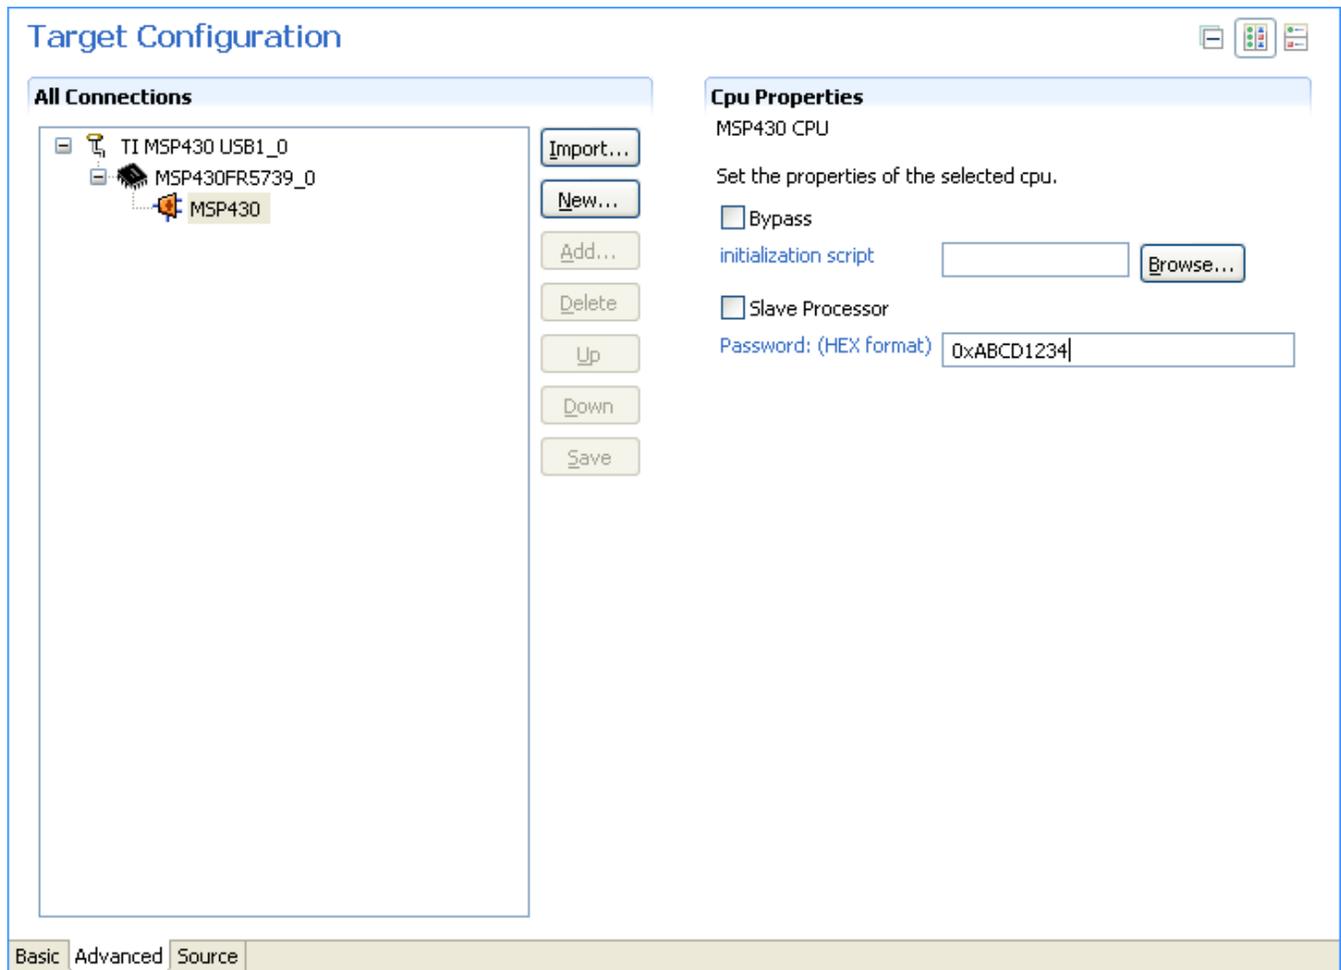

**Figure E-5. MSP430 Password Access**

## E.4 LPMx.5 CCS Debug Support

LPMx.5 is a low-power mode in which the entry and exit is handled differently compared to other low-power modes. When used properly, LPMx.5 provides the lowest power consumption available on a device. To achieve this, entry to LPMx.5 disables the LDO of the PMM module, removing the supply voltage from the core and the JTAG module of the device. Because the supply voltage is removed from the core, all register contents and SRAM contents are lost. Exit from LPMx.5 causes a BOR event, which forces a complete reset of the system.


---

**NOTE:** See the corresponding MSP430 device family user's guide for additional LPMx.5 details.

---

### E.4.1 Debugging With LPMx.5

To enable the LPMx.5 debug feature, the Halt on device wake up (required for debugging LPMx.5 mode) checkbox must be enabled (see [Figure E-6](#)). To enable LPMx.5 debug, click Project Properties → Debug → MSP430 Properties → Halt on device wakeup (required for debugging LPMx.5 mode).

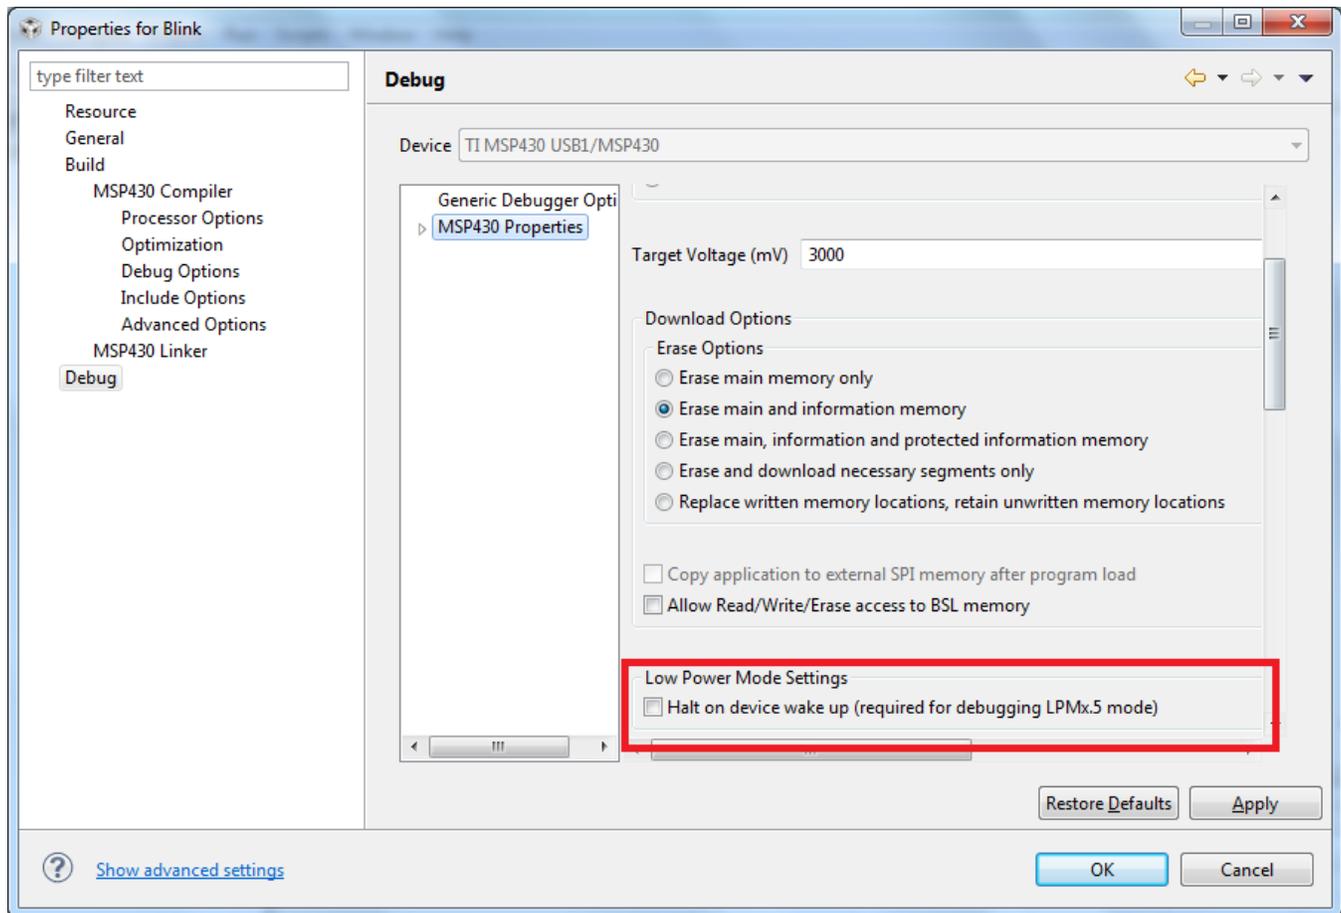

**Figure E-6. Enabling LPMx.5 Debug Support**

If the LPMx.5 debug mode is enabled, a notification is displayed in the debugger console log every time the target device enters and leaves LPMx.5 mode. Pressing the Halt or Reset button in CCS wakes the target device from LPMx.5 and stops it at code start. All breakpoints that were active before LPMx.5 are restored and reactivated automatically.

### E.4.2 LPMx.5 Debug Limitations

When a target device is in LPMx.5 mode, it is not possible to set or remove advanced conditional or software breakpoints. It is possible to set hardware breakpoints. In addition, only hardware breakpoints that were set during LPMx.5 can be removed in the LPMx.5 mode. Attach to running target is not possible in combination with LPMx.5 mode debugging, as this results in device reset.

---

**NOTE:** The option "RUN FREE" is currently not supported in CCS v.5.1.x and CCS v5.4.x when LPMx.5 debugging is active.

See the corresponding MSP430 device family user's guide for additional LPMx.5 details.

---

## Revision History

Version	Comments
SLAU157Z	Updated information throughout for Code Composer Studio IDE v5.5. <a href="#">Table 2-1</a> , Added emulation features for MSP430F523x, F524x, F525x (see <i>MSP430F52xx</i> ), and i2040 (see <i>MSP430i20xx</i> ). <a href="#">Section 2.1.3</a> , Added MSPMathlib support.
SLAU157Y	Updated information throughout for Code Composer Studio IDE v5.4. Removed support for MSP-FET430PIF emulator.
SLAU157X	Added emulation features for MSP430TCH5E.
SLAU157W	Added emulation features for MSP430F535x, MSP430F565x, and MSP430F645x.
SLAU157V	Updated information throughout for Code Composer Studio v5.3. Added emulation features for MSP430SL5438A. Updated LPMx.5 debugging support for MSP430F67xx in <a href="#">Table 2-1</a> .
SLAU157U	Updated information throughout for Code Composer Studio v5.2. Added emulation features for MSP430FR59xx and MSP430F665x. Updated LPMx.5 debugging support in <a href="#">Table 2-1</a> and updated <a href="#">Section E.4</a> .
SLAU157T	Updated information throughout for Code Composer Studio v5.1. Added emulation features for CC430F512x, CC430F514x, CC430F614x.
SLAU157S	Added emulation features for MSP430F52xx, F533x, F643x, F67xx.
SLAU157R	Added emulation features for MSP430FR57xx, LPMx.5, and general MSP430 Password Protection instructions in <a href="#">Appendix E</a> .
SLAU157Q	Added emulation features for MSP430F5310.
SLAU157P	Added emulation features for MSP430AFE253, MSP430F532x, and MSP430F534x.
SLAU157O	Added emulation features for MSP430BT5190, MSP430F530x, and MSP430F563x. Added BSL support for MSP430F5xx and MSP430F6xx in <a href="#">Appendix E</a> and enhanced System Pre Init section in <a href="#">Appendix A</a> .
SLAU157N	Added emulation features for MSP430L092 and MSP430C092 and memory information in <a href="#">Appendix E</a> .
SLAU157M	Added emulation features for MSP430G2xxx, MSP430F51x1, MSP430F51x2, MSP430F550x, MSP430F5510, MSP430F551x, MSP430F552x, MSP430F663x.
SLAU157L	Updated information throughout for Code Composer Studio v4.1. Added emulation features for MSP430F44x1, MSP430F461x, MSP430F461x1.
SLAU157K	Added emulation features for MSP430F54xxA, MSP430F55xx. Updated and extended <a href="#">Table 2-1</a> with architecture information.
SLAU157J	Updated information throughout for Code Composer Studio v4. Removed information on hardware. It was moved into the <i>MSP430 Hardware Tools User's Guide</i> ( <a href="#">SLAU278</a> )
SLAU157I	Added MSP-FET430U100A kit in <a href="#">Section 1.7</a> and MSP-TS430PZ100A target socket module schematic ( <a href="#">Figure B-19</a> ) and PCB ( <a href="#">Figure B-20</a> ). Added emulation features for CC430F513x, CC430F612x, CC430F613x, MSP430F41x2, MSP430F47x, MSP430FG479, and MSP430F471xx in <a href="#">Table 2-1</a> . Updated MSP-TS430PN80 target socket module schematic ( <a href="#">Figure B-15</a> ) with information on MSP430F47x and MSP430FG47x. Removed information throughout on MSP-FET430Pxx0 and MSP-FET430X110 kits.
SLAU157H	Updated information throughout for Code Composer Essentials v3.1.
SLAU157G	Added MSP-FET430U5x100 kit and MSP-TS430PZ5x100 target socket module schematic.
SLAU157F	Added crystal information to <a href="#">Section 1.7</a> . Added overview of debug interfaces as <a href="#">Table 1-1</a> . Added eZ430-F2013, T2012, and eZ430-RF2500. Updated information throughout for Code Composer Essentials v3.
SLAU157E	Added MSP-TS430PW28 target socket module, schematic ( <a href="#">Figure B-5</a> ) and PCB ( <a href="#">Figure B-6</a> ). Updated MSP-FET430U28 kit content information (DW or PW package support) in <a href="#">Section 1.7</a> . Added emulation features for MSP430F21x2 to <a href="#">Table 2-1</a> . Updated MSP-TS430PW14 target socket module schematic ( <a href="#">Figure B-1</a> ). Updated MSP-TS430DA38 target socket module schematic ( <a href="#">Figure B-7</a> ).
SLAU157D	Added <a href="#">Section 1.12</a> . Updated <a href="#">Table 2-1</a> . Updated <a href="#">Appendix F</a> .

<b>Version</b>	<b>Comments</b>
SLAU157C	Updated Appendix F. Added emulation features for MSP430F22x2, MSP430F241x, MSP430F261x, MSP430FG42x0 and MSP430F43x in <a href="#">Table 2-1</a> .
SLAU157B	Renamed MSP-FET430U40 to MSP-FET430U23x0. Replaced MSP-FET430U40 schematic and PCB figures with renamed MSP-FET430U23x0 figures. Added FAQ Hardware #2 in Section A.1. Added FAQ Debugging #4 in Section A.3.

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

## EVALUATION BOARD/KIT/MODULE (EVM) ADDITIONAL TERMS

Texas Instruments (TI) provides the enclosed Evaluation Board/Kit/Module (EVM) under the following conditions:

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please visit [www.ti.com/esh](http://www.ti.com/esh) or contact TI.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used. TI currently deals with a variety of customers for products, and therefore our arrangement with the user is not exclusive. TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.

## REGULATORY COMPLIANCE INFORMATION

As noted in the EVM User's Guide and/or EVM itself, this EVM and/or accompanying hardware may or may not be subject to the Federal Communications Commission (FCC) and Industry Canada (IC) rules.

For EVMs **not** subject to the above rules, this evaluation board/kit/module is intended for use for ENGINEERING DEVELOPMENT, DEMONSTRATION OR EVALUATION PURPOSES ONLY and is not considered by TI to be a finished end product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC or ICES-003 rules, which are designed to provide reasonable protection against radio frequency interference. Operation of the equipment may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

### General Statement for EVMs including a radio

*User Power/Frequency Use Obligations:* This radio is intended for development/professional use only in legally allocated frequency and power limits. Any use of radio frequencies and/or power availability of this EVM and its development application(s) must comply with local laws governing radio spectrum allocation and power limits for this evaluation module. It is the user's sole responsibility to only operate this radio in legally acceptable frequency space and within legally mandated power limitations. Any exceptions to this are strictly prohibited and unauthorized by Texas Instruments unless user has obtained appropriate experimental/development licenses from local regulatory authorities, which is responsibility of user including its acceptable authorization.

### For EVMs annotated as FCC – FEDERAL COMMUNICATIONS COMMISSION Part 15 Compliant

#### Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### FCC Interference Statement for Class A EVM devices

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### **FCC Interference Statement for Class B EVM devices**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **For EVMs annotated as IC – INDUSTRY CANADA Compliant**

This Class A or B digital apparatus complies with Canadian ICES-003.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **Concerning EVMs including radio transmitters**

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

### **Concerning EVMs including detachable antennas**

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This radio transmitter has been approved by Industry Canada to operate with the antenna types listed in the user guide with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Cet appareil numérique de la classe A ou B est conforme à la norme NMB-003 du Canada.

Les changements ou les modifications pas expressément approuvés par la partie responsable de la conformité ont pu vider l'autorité de l'utilisateur pour actionner l'équipement.

### **Concernant les EVMs avec appareils radio**

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### **Concernant les EVMs avec antennes détachables**

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Le présent émetteur radio a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés dans le manuel d'usage et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

## **【Important Notice for Users of EVMs for RF Products in Japan】**

**This development kit is NOT certified as Confirming to Technical Regulations of Radio Law of Japan**

If you use this product in Japan, you are required by Radio Law of Japan to follow the instructions below with respect to this product:

1. Use this product in a shielded room or any other test facility as defined in the notification #173 issued by Ministry of Internal Affairs and Communications on March 28, 2006, based on Sub-section 1.1 of Article 6 of the Ministry's Rule for Enforcement of Radio Law of Japan,
2. Use this product only after you obtained the license of Test Radio Station as provided in Radio Law of Japan with respect to this product, or
3. Use of this product only after you obtained the Technical Regulations Conformity Certification as provided in Radio Law of Japan with respect to this product. Also, please do not transfer this product, unless you give the same notice above to the transferee. Please note that if you could not follow the instructions above, you will be subject to penalties of Radio Law of Japan.

**Texas Instruments Japan Limited**  
**(address) 24-1, Nishi-Shinjuku 6 chome, Shinjuku-ku, Tokyo, Japan**

<http://www.tij.co.jp>

### **【無線電波を送信する製品の開発キットをお使いになる際の注意事項】**

本開発キットは技術基準適合証明を受けておりません。

本製品のご使用に際しては、電波法遵守のため、以下のいずれかの措置を取っていただく必要がありますのでご注意ください。

1. 電波法施行規則第6条第1項第1号に基づく平成18年3月28日総務省告示第173号で定められた電波暗室等の試験設備でご使用いただく。
2. 実験局の免許を取得後ご使用いただく。
3. 技術基準適合証明を取得後ご使用いただく。

なお、本製品は、上記の「ご使用にあたっての注意」を譲渡先、移転先に通知しない限り、譲渡、移転できないものとします。

上記を遵守頂けない場合は、電波法の罰則が適用される可能性があることをご留意ください。

日本テキサス・インスツルメンツ株式会社  
東京都新宿区西新宿6丁目24番1号  
西新宿三井ビル

<http://www.tij.co.jp>

## **EVALUATION BOARD/KIT/MODULE (EVM) WARNINGS, RESTRICTIONS AND DISCLAIMERS**

**For Feasibility Evaluation Only, in Laboratory/Development Environments.** Unless otherwise indicated, this EVM is not a finished electrical equipment and not intended for consumer use. It is intended solely for use for preliminary feasibility evaluation in laboratory/development environments by technically qualified electronics experts who are familiar with the dangers and application risks associated with handling electrical mechanical components, systems and subsystems. It should not be used as all or part of a finished end product.

Your Sole Responsibility and Risk. You acknowledge, represent and agree that:

1. You have unique knowledge concerning Federal, State and local regulatory requirements (including but not limited to Food and Drug Administration regulations, if applicable) which relate to your products and which relate to your use (and/or that of your employees, affiliates, contractors or designees) of the EVM for evaluation, testing and other purposes.
2. You have full and exclusive responsibility to assure the safety and compliance of your products with all such laws and other applicable regulatory requirements, and also to assure the safety of any activities to be conducted by you and/or your employees, affiliates, contractors or designees, using the EVM. Further, you are responsible to assure that any interfaces (electronic and/or mechanical) between the EVM and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard.
3. Since the EVM is not a completed product, it may not meet all applicable regulatory and safety compliance standards (such as UL, CSA, VDE, CE, RoHS and WEEE) which may normally be associated with similar items. You assume full responsibility to determine and/or assure compliance with any such standards and related certifications as may be applicable. You will employ reasonable safeguards to ensure that your use of the EVM will not result in any property damage, injury or death, even if the EVM should fail to perform as described or expected.
4. You will take care of proper disposal and recycling of the EVM's electronic components and packing materials.

**Certain Instructions.** It is important to operate this EVM within TI's recommended specifications and environmental considerations per the user guidelines. Exceeding the specified EVM ratings (including but not limited to input and output voltage, current, power, and environmental ranges) may cause property damage, personal injury or death. If there are questions concerning these ratings please contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may result in unintended and/or inaccurate operation and/or possible permanent damage to the EVM and/or interface electronics. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, some circuit components may have case temperatures greater than 60°C as long as the input and output are maintained at a normal ambient operating temperature. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors which can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during normal operation, please be aware that these devices may be very warm to the touch. As with all electronic evaluation tools, only qualified personnel knowledgeable in electronic measurement and diagnostics normally found in development environments should use these EVMs.

**Agreement to Defend, Indemnify and Hold Harmless.** You agree to defend, indemnify and hold TI, its licensors and their representatives harmless from and against any and all claims, damages, losses, expenses, costs and liabilities (collectively, "Claims") arising out of or in connection with any use of the EVM that is not in accordance with the terms of the agreement. This obligation shall apply whether Claims arise under law of tort or contract or any other legal theory, and even if the EVM fails to perform as described or expected.

**Safety-Critical or Life-Critical Applications.** If you intend to evaluate the components for possible use in safety critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, such as devices which are classified as FDA Class III or similar classification, then you must specifically notify TI of such intent and enter into a separate Assurance and Indemnity Agreement.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2013, Texas Instruments Incorporated

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)