



USB connectivity - create and print your job from your PC using Brady's LabelMark™ Labelling Software (for more information see page 176).

IDXPERT 2.0 Labelling System

Order Reference	Description
XPERT-ABC	IDXPERT 2.0 Printer – ABC Layout*
XPERT-KEY	IDXPERT 2.0 Printer – KEYBOARD Layout*

* Printer ships with: Hard carry case, 38.10 mm x 9.1 m continuous tape, PC cable, product CD with tutorials.

Accessories

IDXPERT Labelling System Accessories

Order Reference	Description
XPERT-AC	AC Adapter (for ABC or KEY printers)
XPERT-ACEUR	AC Adapter European Version
XPERT-ACUK	AC Adapter UK version
PCCABLE-1	Spare Serial PC Communications Cable
PCK-4	Cleaning Kit
XPERT-HC-ABC	Spare Hard Case for ABC Layout Printer
XPERT-HC-KEY	Spare Hard Case for KEYBOARD Layout Printer
SERIAL-TO-USB	Serial-to-USB adapter
XPERT-CABLE-USB	Spare USB Cable for IDXPERT

Specifications

Print method	Thermal transfer (non smearing)
Weight	1.08 kg ABC / 0.97 kg keyboard
Dimensions (L x W x H)	Keyboard layout: 241.30 mm x 88.90 mm x 190.50 mm ABC layout: 127.00 mm x 95.25 mm x 292.10 mm
Power source	6 AAs or optional AC adapter
Operating temperature	4° - 49°C
Agency approvals	FCC Class A Approved

More Options. More Brains. More Brawn. Less Waste.

When you need clear, durable labels on the spot, you need the IDXPERT™ Hand-held labelling system from Brady.

It offers the crisp printing, easy formatting, convenient label sizes, and portability you need for electrical identification, datacom installations, facility and safety labelling, industrial ID, and much more.

More Types™ of Labels

- Coloured continuous tapes for pipe markers, equipment ID and safety warnings
- PermaSleeve™ wire marker sleeves
- Flag wire marker
- Self-laminating wire and cable markers
- Terminal block markers
- Patch panel markers
- Face plate and outlet markers
- General-purpose die-cut labels

More Sizes

- Prints from 1.52 mm up to 31.75 mm characters on label stock up to 38.10 mm wide

More Symbols

- Code 39 bar codes, Code 128
- 82 Symbols including electrical, voice/data, safety and protection, warning, and machine and operational

More Brains

- Drop Lock & Go™ Smart Cartridges™ lets you change ribbon and labels in one fast step
- Electronically pre-calibrated to orient the label just the way you need it with no special keys to press
- Memory to store frequently used set-ups
- Multi-zone printing for clear and legible small signs: create one zone for the image, and another one for the text.
- Ergonomic design really fits your hand
- 300 dpi thermal transfer printing stays crisp and bright

More Brawn

- Print labels on the spot, 50-70% faster than dot matrix printers. Sharp, non-smearing 300 dpi thermal transfer printing makes your labels legible and your work look great.
- Large, informative display clearly displays label to be printed.
- Rugged, drop-tested construction
- Battery life indicator

Less Waste

- Edge-to-edge printing on continuous tapes so you don't pay for unused label material
- Die-cut labels are pre-cut to the size you need-no waste
- Runs on 6 AAs or optional AC adapter

IDXPERT™ Materials Chart

Material Number	Max. Service Temp. °C	Colour	Finish	Use	Special Properties
Nylon Cloth					
B-499	90	30 days	White	Matt	Low profile through-conduit wire marking, component and general labelling High adhesion makes all-purpose wire marker ideal for environments where heat, oil and dirt are present
Polyester					
B-422	100	30 days	White	Gloss	Electronic PCB ID and component, bar code label and rating plate, outlet and patch panel identification 2 mil adhesive recommended for application on textured surfaces
B-428	120	30 days	Silver	Matt	Rating plates; electronic component marking
B-432	100	30 days	Clear	Gloss	General labelling rating/name plates, outlet and general communications Clear glossy polyester for highly textured and hard to adhere to surfaces.
B-483	120	30 days	White	Gloss	General labelling; bar code label and rating plates Ultra-aggressive adhesive for thermal transfer printing, designed for powder coated surfaces
Polyolefin					
B-342	135	30 days	White Yellow	Matt	Wire and cable identification 3;1 shrink ratio self-extinguishing. Meets the material and physical property requirements of SAE-AMS-DTL-23053/C (Class 1) SAE-AS-81531, MIL-STD-202F, methode 215K and UL224.
Polypropylene					
B-412	100	30 days	White	Matt	Wire and cable identification or product inventory identification where legibility and tensile strength are needed Highly durable labels designed for thermal transfer printing.
Vinyl					
B-427	70	30 days	White	Matt	Self-laminating wire and cable marking Excellent abrasion and smudge resistance
B-580	89	30 days	White, yellow, red, orange, blue, green	Gloss	Safety signage, pipe marking, warehouse marking and general identification. Durable high gloss vinyl for both indoor and outdoor use. 5 year average outdoor durability.
Vinyl Cloth					
B-498	82	30 days	White	Semi-Gloss	Wire and electronic component marking Repositionable adhesive



Brady has hundreds of RoHS compliant materials for you to choose from and we are committed to provide you with the latest information. Simply go to www.weeerohs.bradyeurope.com for the latest up-date.

UL	*These materials are UL recognized.
CSA	*These materials are CSA approved.
AGA	*These materials are AGA approved.
HF	Halogen-Free (DIN VDE 0472/parts 815)




Outlet ID



General Identification



Self-laminating Wiremarkers

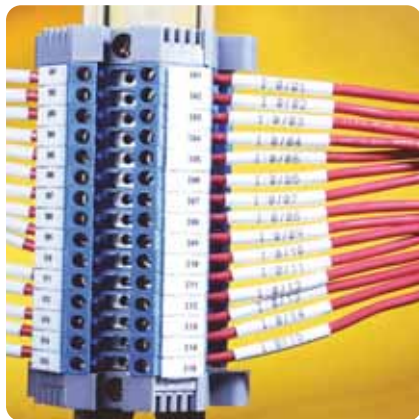


Sleeves



Symbols

IDXPERT™ Electrical Identification Labels

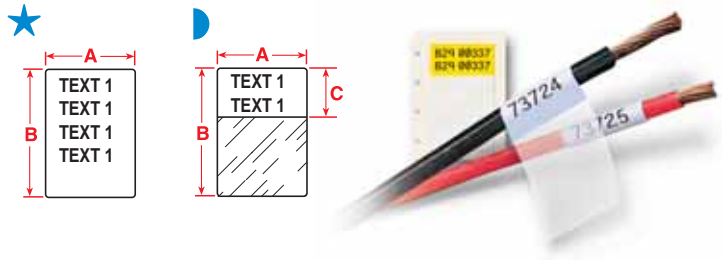

Wire and Cable Markers

B-498 Repositionable White Vinyl Cloth B-427 Self-laminating Vinyl

Diagram	Order Reference	Labels Per Cartridge	Label dimensions		Write-On height C (mm)	Colour
			A (mm)	B (mm)		
3 Gauge-2/0 Max dia 14.00 mm						
★	X-21-498	95	25.40	63.50		BK on WT
◐	XSL-21-427	100	25.40	63.50	19.05	BK on WT
◐	XSL-21-427-YL-BK	100	25.40	63.50	19.05	BK on YL
◐	XSL-116-427	100	38.10	63.50	19.05	BK on WT
3/0-400 kcmil Max dia 22.00 mm						
★	X-23-498	60	25.40	101.60		BK on WT
◐	XSL-23-427	85	25.40	101.60	25.40	BK on WT
◐	XSL-23-427-YL-BK	85	25.40	101.60	25.40	BK on YL
◐	XSL-33-427	85	38.10	101.60	25.40	BK on WT
10-4 Gauge Max dia 7.00 mm						
★	X-31-498	200	25.40	38.10		BK on WT
★	X-103-498	200	25.40	31.75		BK on WT
★	X-162-498	165	12.70	38.10		BK on WT
◐	XSL-29-427	450	12.70	38.10	12.70	BK on WT
◐	XSL-30-427	250	19.05	38.10	12.70	BK on WT
◐	XSL-31-427	250	25.40	38.10	12.70	BK on WT
◐	XSL-31-427-YL-BK	250	25.40	38.10	12.70	BK on YL
◐	XSL-32-427	225	38.10	38.10	12.70	BK on WT
◐	XSL-102-427	250	12.70	31.75	9.53	BK on WT
◐	XSL-103-427	250	25.40	31.75	12.70	BK on WT
◐	XSL-115-427	250	38.10	31.75	12.70	BK on WT
12-10 Gauge Max dia 5.00 mm						
★	X-18-498	225	19.05	25.40		BK on WT
★	X-19-498	200	25.40	25.40		BK on WT
★	X-163-498	225	12.70	25.40		BK on WT
◐	XSL-17-427	450	12.70	25.40	9.53	BK on WT
◐	XSL-18-427	250	19.05	25.40	9.53	BK on WT
◐	XSL-19-427	250	25.40	25.40	9.53	BK on WT
◐	XSL-133-427	175	44.45	25.40	9.53	BK on WT
16-10 Gauge Max dia 4.00 mm						
★	X-11-498	275	12.70	19.05		BK on WT
◐	XSL-11-427	450	12.70	19.05	9.53	BK on WT
◐	XSL-96-427	250	25.40	19.05	9.53	BK on WT
22-16 Gauge Max dia 2.80 mm						
★	X-7-498	300	12.70	12.70		BK on WT
500-900 kcmi Max dia 33.00 mm						
◐	XSL-34-427	50	38.10	152.40	38.10	BK on WT

*Approx. based on AWG for THHN wire.


Please Note: Any label 25.40 mm or larger in width will be rotated on liner

FYI

Ever wonder how to find the correct height for your self lam labels if you have the wire diameter or wire circumference? Try this formula:

wire diameter x 3.147 (pi) = circumference
circumference x 1.5 (wrapping label 1.5 times around wire) = length (B dimension of self lam label)

IDXPERT™ Electrical Identification Labels

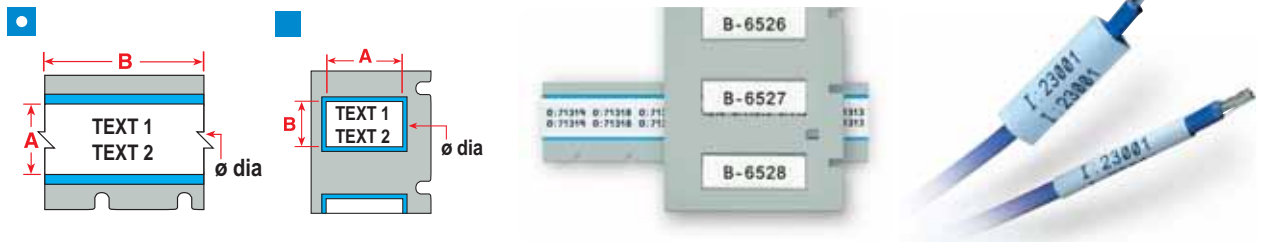

Wire and Cable Markers – PermaSleeve™ Sleeves

B-342 Heat-Shrinkable White and Yellow Polyolefin, 3:1 shrink ratio


Diagram	Order Reference	Labels Per Cartridge	Dimensions		Colour
			A (mm)	B (mm)	
■	12-6 Gauge dia 3.20 - 8.10 mm				
	XPS-375-1	100	25.78	16.38	BK on WT
●	XPS-375-CONT	Cont.	16.38	2.44 m	BK on WT
■	16-10 Gauge dia 2.40 - 5.50 mm				
	XPS-250-1	100	25.78	11.15	BK on WT
	XPS-250-CONT	Cont.	11.15	3.65 m	BK on WT
■	XPS-250-CONT-YL-BK	Cont.	11.15	3.65 m	BK on YL
■	18-12 Gauge dia 1.60 - 3.80 mm				
	XPS-187-1	100	25.78	8.50	BK on WT
	XPS-187-CONT	Cont.	8.50	2.44 m	BK on WT
■	XPS-187-CONT-YL-BK	Cont.	8.50	2.44 m	BK on YL
■	22-16 Gauge dia 1.20 - 2.80 mm				
	XPS-125-1	100	25.78	5.96	BK on WT
	XPS-125-CONT	Cont.	5.96	2.44 m	BK on WT
■	XPS-125-CONT-YL-BK	Cont.	5.96	2.44 m	BK on YL

*Approx based on NEC for THHN wire.

Terminal Block Markers

B-498 Repositionable White Vinyl Cloth

Diagram	Order Reference	Labels Per Cartridge	Label dimensions		Colour
			A mm	B m	
●	XC-240-498	Cont.	6.10	6.10 m	BK on WT
●	XC-318-498	Cont.	8.07	6.10 m	BK on WT
●	XC-375-498	Cont.	9.53	6.10 m	BK on WT



IDXPERT™ Electrical Identification Labels

Cable Markers

When you are looking for cable markers with extreme durability, the Laminat range of carriers and tags is the solution. There are two types of Laminat cable markers: Laminat™ Carriers (B-7644), Laminat™ Tags (B-7645)

B-7644 Laminat™ Carriers

Laminat™ Carriers come with a strip to laminate text labels. The carrier is fixed with two cable ties directly on the cables or wires. This dependable marking system enables you to permanently mark cables and wires.

The Laminat™ Carriers can be used for any type of cable identification where permanency of the legend is crucial. Follow these steps to mount the label onto the Laminat™ carrier:



1) Pull the protective foil backwards




2) Place the label in the middle leaving space for sealing on all four sides of the label.



3) Seal the carrier by placing a finger on the foil and pushing forward, thus rolling over the foil and rolling off the silicon liner.




4) Always feed the cable ties from the top, thus bending down the Laminat™ carrier along the cable.



Order Reference	Markers Per Box	Material	Colour	Dimensions		Seal-Up Area		Labels /Tapes Recommended
				Width A (mm)	Height B (mm)	C (mm)	D (mm)	
LC-65x13-B7644	100	Polypropylene	Yellow	65.00	13.00	45.00	9.00	XC-236-580-YL-BK
LC-71x9-B7644	100	Polypropylene	Yellow	71.00	9.00	45.00	9.00	XC-236-580-YL-BK
LC-103x15-B7644	100	Polypropylene	Yellow	103.00	15.00	55.00	15.00	XC-354-580-YL-BK
LC-128x15-B7644	100	Polypropylene	Yellow	128.00	15.00	80.00	15.00	XC-354-580-YL-BK
LC-178x15-B7644	50	Polypropylene	Yellow	178.00	15.00	130.00	15.00	XC-354-580-YL-BK

B-7645 Laminat™ Tags

The Laminat™ Tags (Manilla tags) are ideal for identification of material in tough environments including valves, instruments, motors and other industrial components. The tags are available in two versions: with and without stainless steel reinforcement rings.



Order Reference	Markers Per Box	Material	Colour	Dimensions		Seal-Up Area		Labels /Tapes Recommended
				Width A (mm)	Height B (mm)	C (mm)	D (mm)	
LT-59x25-B7645	50		Yellow	59.00	25.00	43.00	25.00	XC-354-580-YL-BK
LT-59x25-B7645-WR	50	Reinforced	Yellow	59.00	25.00	43.00	25.00	XC-354-580-YL-BK
LT-150x25-B7645	50		Yellow	150.00	25.00	135.00	25.00	XC-500-580-CL-BK
LT-150x25-B7645-WR	50	Reinforced	Yellow	150.00	25.00	135.00	25.00	XC-500-580-CL-BK

Labels Specifically Designed to Fit The Laminat Carriers and Tags

B-580 White and Yellow Indoor/Outdoor Vinyl





Diagram	Order Reference	Labels Per Cartridge	Label dimensions		Colour
			A (mm)	B (m)	
○	XC-236-580-WT-BK	Cont.	6.00	9.14	BK on WT
○	XC-236-580-YL-BK	Cont.	6.00	9.14	BK on YL
○	XC-354-580-WT-BK	Cont.	9.00	9.14	BK on WT
○	XC-354-580-YL-BK	Cont.	9.00	9.14	BK on YL
○	XC-500-580-CL-BK	Cont.	12.70	7.62	BK on CL

IDXPERT™ Electrical Identification Labels

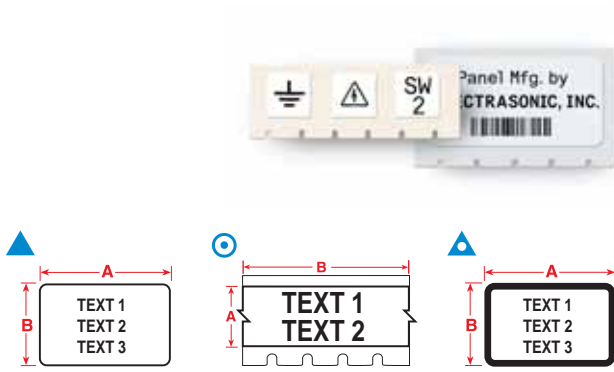


Automation and Electrical Component Markers

B-422 Permanent Glossy Polyester, B-428 Metallised Polyester, B-483 Ultra Aggressive Polyester, B-499 White and Yellow Nylon Cloth, B-580 Indoor/Outdoor Vinyl

Diagram	Order Reference	Labels Per Cartridge	Dimensions		Material Notes	Colour
			A (mm)	B (mm)		
▲	X-7-422	350	12.70	12.70	Polyester (Gloss)	BK on WT
▲	X-11-499	275	19.05	12.70	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-17-422	450	25.40	12.70	Polyester (Gloss)	BK on WT
▲	X-17-428-SV-BK	450	25.40	12.70	Metallised Polyester	BK on SV
▲	X-17-483	450	25.40	12.70	Polyester (Ultra Aggressive)	BK on WT
▲	X-19-422	250	25.40	25.40	Polyester (Gloss)	BK on WT
▲	X-20-428-SV-BK	100	50.80	25.40	Metallised Polyester	BK on SV
▲	X-20-483	100	50.80	25.40	Polyester (Ultra Aggressive)	BK on WT
▲	X-24-428-SVBB-BK	450	28.70	12.70	Metallised Polyester (Black Border)	BK on SV
▲	X-29-422	450	38.10	12.70	Polyester (Gloss)	BK on WT
▲	X-29-428-SV-BK	450	38.10	12.70	Metallised Polyester	BK on SV
▲	X-30-422	250	38.10	19.05	Polyester (Gloss)	BK on WT
▲	X-30-428-SV-BK	325	38.10	19.05	Metallised Polyester	BK on SV
▲	X-30-499	300	38.10	19.05	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-61-483	100	50.80	12.70	Polyester (Ultra Aggressive)	BK on WT
▲	X-78-499	125	25.40	48.60	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-84-499	250	22.86	12.70	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-132-422	250	31.75	38.10	Polyester (Gloss)	BK on WT
▲	X-132-499	200	31.75	38.10	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-162-499	165	38.10	12.70	Nylon Cloth (Extra Pliable)	BK on WT
⊙	XC-500-422	Cont.	12.0	9.14 m	Polyester (Gloss)	BK on WT
⊙	XC-1000-422	Cont.	25.40	9.14 m	Polyester (Gloss)	BK on WT
⊙	XC-1000-580-OR-BK	Cont.	25.40	9.14 m	Indoor/Outdoor Vinyl*	BK on OR

*For additional continuous general purpose tapes, refer to "Facility and Safety Labels" on p. 19 for more parts.
Please Note: Any label 25.40 mm or larger in width will be rotated on liner

IDXPERT™ Data Communications Equipment and Cabling Labels

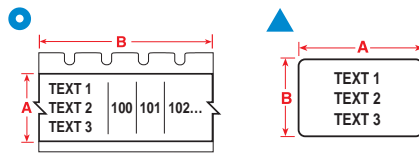


Patch Panel, Outlet and Faceplate Markers

B-412 Polypropylene, B-422 Permanent Gloss Polyester, B-483 Ultra aggressive Gloss Polyester, B-432 Clear Gloss Polyester

Diagram	Order Reference	Labels Per Cartridge	Dimensions		Material Notes	Colour
			A (mm)	B (mm)		
Non-Adhesive Slide-in Strips						
●	XC-375-412	Cont.	9.53	7.32	Slide-in Polypropylene Tag Stock	BK on WT
●	XC-475-412	Cont.	12.07	7.32	Slide-in Polypropylene Tag Stock	BK on WT
Adhesive Stick-On Strips						
●	XC-375-422	Cont.	9.53	9.14	Polyester (Gloss)	BK on WT
●	XC-475-422	Cont.	12.07	9.14	Polyester (Gloss)	BK on WT
Stick-on Individual Labels						
▲	X-7-422	350	12.70	12.70	Polyester (Gloss)	BK on WT
▲	X-17-422	450	25.40	12.70	Polyester (Gloss)	BK on WT
▲	X-17-432-CL-BK	350	25.40	12.70	Polyester	BK on CL
▲	X-78-432-CL-BK	100	25.40	48.30	Polyester	BK on CL
▲	X-29-422	450	38.10	12.70	Polyester (Gloss)	BK on WT
▲	X-30-422	250	38.10	19.05	Polyester (Gloss)	BK on WT
▲	X-61-483	100	50.80	12.70	Polyester (Gloss)	BK on WT

Please Note: Any label 25.40 mm or larger in width will be rotated on liner




Cable Markers

B-427 Self-Laminating Vinyl

Diagram	Order Reference	Labels Per Cartridge	Dimensions			Colour	Application
			A (mm)	B (mm)	C (mm)		
▶	XSL-19-427	250	25.40	25.40	9.53	BK on WT	2 pair Fibre/Coaxial, Single/Multi-Mode
▶	XSL-21-427	100	25.40	63.50	19.05	BK on WT	25 pair Copper, 4-12 pair Fibre, Coaxial
▶	XSL-21-427-YL-BK	100	25.40	63.50	19.05	BK on YL	25 pair Copper, 4-12 pair Fibre, Coaxial
▶	XSL-23-427	85	25.40	101.60	25.40	BK on WT	50 pair Copper, 24 pair Fibre, Backbone
▶	XSL-23-427-YL-BK	85	25.40	101.60	25.40	BK on YL	50 pair Copper, 24 pair Fibre, Backbone
▶	XSL-29-427	450	12.70	38.10	12.70	BK on WT	CAT-5, 4 pair UTP Copper
▶	XSL-30-427	250	19.05	38.10	12.70	BK on WT	CAT-5, 4 pair UTP Copper
▶	XSL-31-427	250	25.40	38.10	12.70	BK on WT	CAT-5, 4 pair UTP Copper, Fibre, Coaxial
▶	XSL-31-427-YL-BK	250	25.40	38.10	12.70	BK on YL	CAT-5, 4 pair UTP Copper, Fibre, Coaxial
▶	XSL-32-427	225	38.10	38.10	12.70	BK on WT	CAT-5, 4 pair UTP Copper, Fibre, Coaxial
▶	XSL-33-427	85	38.10	101.60	25.40	BK on WT	50 pair Copper, 24 pair Fibre, Backbone
▶	XSL-34-427	50	38.10	152.40	38.10	BK on WT	100 pair Copper, 36 pair Fibre, Backbone
▶	XSL-102-427	250	12.70	31.75	9.53	BK on WT	CAT-5, 4 pair UTP Copper
▶	XSL-103-427	250	25.40	31.75	12.70	BK on WT	CAT-5, 4 pair UTP Copper, Fibre, Coaxial
▶	XSL-115-427	250	38.10	31.75	12.70	BK on WT	CAT-5, 4 pair UTP Copper
▶	XSL-116-427	100	38.10	63.50	19.05	BK on WT	25 pair Copper, 4-12 pair Fibre, Coaxial

Please Note: Any label 25.40 mm or larger in width will be rotated on liner



IDXPERT™ Voice / Data Communications Identification Labels



Cable Flags

B-499 Nylon cloth

Diagram	Order Reference	Labels Per Cartridge	Dimensions			Colour	Remark
			A (mm)	B (mm)	C (mm)		
★	XF-151-499	115	25.40	25.40	6.35	BK on WT	Standard Flag
approx. 25.40 mm x 25.40 mm resulting flag size							
★	XF-152-499	200	12.70	38.10	6.35	BK on WT	Low Profile Flag
approx. 12.70 mm x 38.10 mm resulting flag size							



Punch Block and Patch Panel Identification

B-412 Polypropylene, B-422 Gloss Polyester

Diagram	Order Reference	Labels Per Cartridge	Dimensions		Material Notes	Colour
			A (mm)	B (mm)		
Non-Adhesive Slide-in Strips						
○	XC-375-412	Cont.	9.53	7.32 m	Slide-in Polypropylene Tag Stock	BK on WT
○	XC-475-412	Cont.	12.07	7.32 m	Slide-in Polypropylene Tag Stock	BK on WT
○	XC-625-412	Cont.	15.88	7.32 m	Slide-in Polypropylene Tag Stock	BK on WT
Adhesive Stick-On Strips*						
○	XC-375-422	Cont.	9.53	9.14 m	Stick-on Gloss Polyester	BK on WT
○	XC-475-422	Cont.	12.07	9.14 m	Stick-on Gloss Polyester	BK on WT
○	XC-625-422	Cont.	15.88	9.14 m	Stick-on Gloss Polyester	BK on WT
Label Each Port						
▲	X-7-422	350	12.70	12.70	Stick-on Gloss Polyester	BK on WT

IDXPERT™ Voice / Data Communications Identification Labels

Identification for Data Centre Equipment, Bays, Racks and Frames

B-422 Permanent Glossy Polyester,
B-483 Ultra Aggressive Polyester,
B-580 Indoor/Outdoor Vinyl, B-432 Clear Gloss Polyester





Diagram	Order Reference	Labels Per Cartridge	Dimensions		Material Notes	Colour
			A (mm)	B (mm)		
▲	X-7-422	350	12.70	12.70	Polyester (Gloss) - for smooth or textured surfaces	BK on WT
▲	X-17-422	450	25.40	12.70	Polyester (Gloss) - for smooth or textured surfaces	BK on WT
▲	X-17-432-CL-BK	350	25.40	12.70	Polyester (Gloss) for highly textured surfaces	BK on CL
▲	X-17-483	450	25.40	12.70	Polyester (Ultra Aggressive) - for smooth or textured surfaces	BK on WT
▲	X-19-422	250	25.40	25.40	Polyester (Gloss) - for smooth or textured surfaces	BK on WT
▲	X-20-483	100	50.80	25.40	Polyester (Ultra Aggressive) - for smooth or textured surfaces	BK on WT
▲	X-29-422	450	38.10	12.70	Polyester (Gloss) - for smooth or textured surfaces	BK on CL
▲	X-30-422	250	38.10	19.50	Polyester (Gloss) - for smooth or textured surfaces	BK on WT
▲	X-78-432-CL-BK	100	25.40	48.30	Polyester (Gloss) for highly textured surfaces	BK on WT
▲	X-61-483	100	50.80	27.70	Polyester (Ultra Aggressive) - for smooth or textured surfaces	BK on WT
▲	X-132-422	250	31.75	38.10	Polyester (Gloss) - for smooth or textured surfaces	BK on WT
⊙	XC-500-422	Cont.	12.00	9.14 m	Polyester (Gloss)	BK on WT
⊙	XC-500-580-YL-BK	Cont.	12.70	9.14 m	Polyester (Ultra Aggressive) - for smooth or textured surfaces Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL
⊙	XC-1000-422	Cont.	25.40	9.14 m	Polyester (Gloss White) - for smooth or textured surfaces	BK on WT
⊙	XC-1000-580-YL-BK	Cont.	25.40	9.14 m	Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL
⊙	XC-1500-580-YL-BK	Cont.	38.10	9.14 m	Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL

Please Note: Any label 25.40 mm or larger in width will be rotated on liner

IDXPERT™ Facility and Safety Labels

Indoor / Outdoor Grade Facility and Safety Labels

B-580 Indoor/Outdoor Vinyl





Diagram	Order Reference	Labels Per Cartridge	Dimensions		Colour
			A (mm)	B (mm)	
⊙	XC-500-580-WT-BK	1 roll (cont.)	12.70	9.14 m	BK on WT
⊙	XC-1000-580-WT-BK	1 roll (cont.)	25.40	9.14 m	BK on WT
⊙	XC-1500-580-WT-BK	1 roll (cont.)	38.10	9.14 m	BK on WT
⊙	XC-500-580-OR-BK	1 roll (cont.)	12.70	9.14 m	BK on OR
⊙	XC-1000-580-OR-BK	1 roll (cont.)	25.40	9.14 m	BK on OR
⊙	XC-1500-580-OR-BK	1 roll (cont.)	38.10	9.14 m	BK on OR
⊙	XC-500-580-YL-BK	1 roll (cont.)	12.70	9.14 m	BK on YL
⊙	XC-1000-580-YL-BK	1 roll (cont.)	25.40	9.14 m	BK on YL
⊙	XC-1500-580-YL-BK	1 roll (cont.)	38.10	9.14 m	BK on YL
⊙	XC-500-580-CL-BK	1 roll (cont.)	12.70	7.62 m	BK on CL
⊙	XC-1000-580-CL-BK	1 roll (cont.)	25.40	7.62 m	BK on CL
⊙	XC-1500-580-CL-BK	1 roll (cont.)	38.10	7.62 m	BK on CL
⊙	XC-500-580-RD-WT	1 roll (cont.)	12.70	9.14 m	WT on RD
⊙	XC-1000-580-RD-WT	1 roll (cont.)	25.40	9.14 m	WT on RD
⊙	XC-1500-580-RD-WT	1 roll (cont.)	38.10	9.14 m	WT on RD
⊙	XC-500-580-GN-WT	1 roll (cont.)	12.70	9.14 m	WT on GN
⊙	XC-1000-580-GN-WT	1 roll (cont.)	25.40	9.14 m	WT on GN
⊙	XC-1500-580-GN-WT	1 roll (cont.)	38.10	9.14 m	WT on GN
⊙	XC-500-580-BL-WT	1 roll (cont.)	12.70	9.14 m	WT on BL
⊙	XC-1000-580-BL-WT	1 roll (cont.)	25.40	9.14 m	WT on BL
⊙	XC-1500-580-BL-WT	1 roll (cont.)	38.10	9.14 m	WT on BL
⊙	XC-500-580-WT-RD	1 roll (cont.)	12.70	9.14 m	RD on WT
⊙	XC-1000-580-WT-RD	1 roll (cont.)	25.40	9.14 m	RD on WT
⊙	XC-1500-580-WT-RD	1 roll (cont.)	38.10	9.14 m	RD on WT

IDXPERT™ Facility and Safety Labels

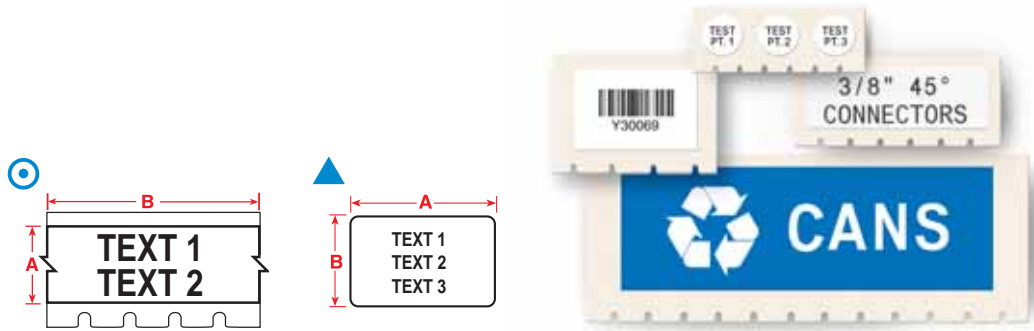

Bins & Storage Identification, General Industrial Identification

B-422 Permanent Glossy Polyester, B-483 Ultra Aggressive Polyester, B-499 Nylon Cloth, B-580 Indoor/Outdoor Vinyl

Diagram	Order Reference	Labels Per Cartridge	Dimensions		Material Notes	Colour
			A (mm)	B (mm)		
▲	X-11-499	275	19.05	12.70	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-84-499	250	22.86	12.70	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-132-499	200	31.75	38.10	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-162-499	165	12.70	38.10	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-30-499	300	38.10	19.05	Nylon Cloth (Extra Pliable)	BK on WT
▲	X-7-422	350	12.70	12.70	Polyester (Gloss)	BK on WT
▲	X-17-422	450	25.40	12.70	Polyester (Gloss)	BK on WT
▲	X-29-422	450	38.10	12.70	Polyester (Gloss)	BK on WT
▲	X-30-422	250	38.10	19.05	Polyester (Gloss)	BK on WT
▲	X-19-422	250	25.40	25.40	Polyester (Gloss)	BK on WT
▲	X-132-422	250	31.75	38.10	Polyester (Gloss)	BK on WT
▲	X-17-483	450	25.40	12.70	Polyester (Ultra Aggressive)	BK on WT
▲	X-61-483	100	12.70	50.80	Polyester (Ultra Aggressive)	BK on WT
▲	X-20-483	100	25.40	50.80	Polyester (Ultra Aggressive)	BK on WT
⊙	XC-500-580-YL-BK	1 roll (cont.)	12.70	9.14 m	Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL
⊙	XC-1000-580-YL-BK	1 roll (cont.)	25.40	9.14 m	Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL
⊙	XC-1500-580-YL-BK	1 roll (cont.)	38.10	9.14 m	Indoor/Outdoor Vinyl (coloured supplies)*	BK on YL

Please Note: Any label 25.40 mm or larger in width will be rotated on liner