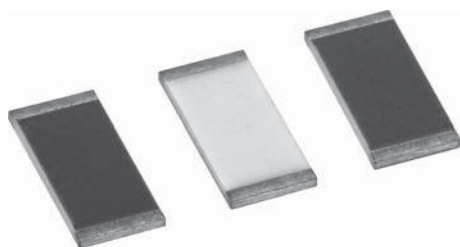
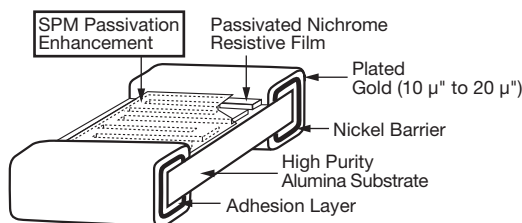


Precision Low TCR High Temperature Thin Film Resistor, Surface Mount Chip, ± 5 ppm/ $^{\circ}\text{C}$ TCR, 0.02 % Tolerance



Vishay's proven precision thin film wraparound resistors will meet your exact requirements. These resistors are ideal for use in oil industry precision applications requiring low noise, long term stability under high temperature, ultra low temperature coefficient of resistance, and low voltage coefficient. The chip resistors are available in any resistance ohmic value in the range specified below.

CONSTRUCTION



FEATURES

- -55 $^{\circ}\text{C}$ to 215 $^{\circ}\text{C}$ operating temperature range
- TCR of ± 5 ppm/ $^{\circ}\text{C}$ standard
- Tolerances to ± 0.02 %
- Anti corrosion resistant film with (SPM) special passivation method
- Stable film and performance characteristics
- 0.5 % max. at 2000 h, 215 $^{\circ}\text{C}$, 25 % rated power
- Non-standard resistance values available
- Very low noise and voltage coefficient (< -30 dB, 0.1 ppm/V)
- UL 94 V-0 flame resistant
- Gold terminations (10 μm to 20 μm)
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS*
Available
**HALOGEN
FREE**

TYPICAL PERFORMANCE

	ABSOLUTE
TCR	5
TOL.	0.02

STANDARD ELECTRICAL SPECIFICATIONS


TEST	SPECIFICATIONS	CONDITIONS
Material	Passivated nichrome	-
Resistance Range	250 Ω to 3 M Ω	-
TCR: Absolute	± 5 ppm/ $^{\circ}\text{C}$	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
Tolerance: Absolute	± 0.1 % to ± 0.02 %	+25 $^{\circ}\text{C}$
Stability: Absolute	$\Delta R \pm 0.5$ %	2000 h at 215 $^{\circ}\text{C}$, 25 % rated power
Stability: Ratio	-	-
Voltage Coefficient	± 0.1 ppm/V (typical)	-
Working Voltage	100 V to 200 V	-
Operating Temperature Range	-55 $^{\circ}\text{C}$ to +215 $^{\circ}\text{C}$	-
Storage Temperature Range	-55 $^{\circ}\text{C}$ to +215 $^{\circ}\text{C}$	-
Noise	< -35 dB (typical)	-
Shelf Life Stability: Absolute	$\Delta R \pm 0.01$ %	1 year at +25 $^{\circ}\text{C}$

COMPONENT RATINGS

CASE SIZE	POWER RATING AT 70 $^{\circ}\text{C}$ (mW)	WORKING VOLTAGE (V)	RESISTANCE RANGE (Ω)
0603	150	75	250 to 130K
0805	250	100	250 to 260K
1206	400	200	500 to 775K
2010	800	200	500 to 2M
2512	1000	200	500 to 3M

Note

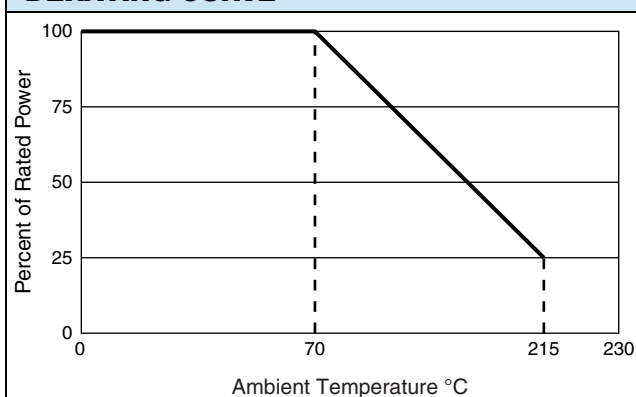
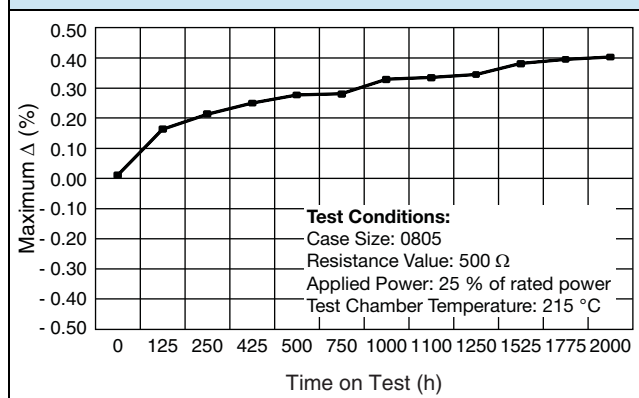
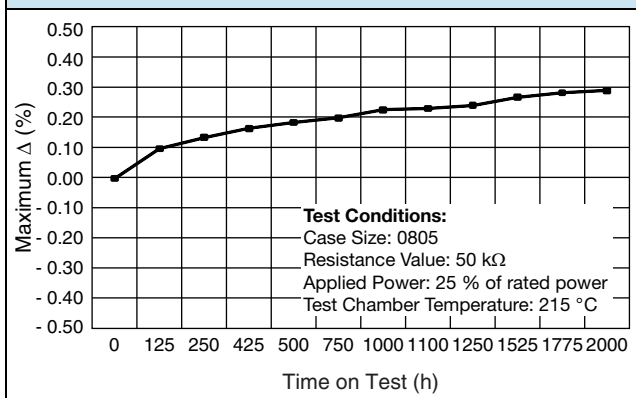
- Consult factory for additional case size

DIMENSIONS in inches


CASE SIZE	TERM	L	W	T	D	E
0603	G	0.064 ± 0.006	0.032 ± 0.005	0.015 to 0.033	0.012 ± 0.005	0.015 ± 0.005
0805	G	0.080 ± 0.006	0.050 ± 0.005	0.015 to 0.033	0.016 ± 0.008	0.015 ± 0.005
1206	G	0.126 ± 0.008	0.063 ± 0.005	0.015 to 0.033	0.020 + 0.005/- 0.010	0.020 + 0.005/- 0.010
2010	G	0.209 ± 0.009	0.098 ± 0.005	0.015 to 0.033	0.020 ± 0.005	0.020 ± 0.005
2512	G	0.259 ± 0.009	0.124 ± 0.005	0.015 to 0.033	0.020 ± 0.005	0.020 ± 0.005

ENVIRONMENTAL TESTS - TYPICAL

ENVIRONMENTAL TEST	10 kΩ ΔR ± (%)	100 kΩ ΔR ± (%)
Thermal Shock	0.02	0.02
Short Time Overload	0.01	0.01
Low Temperature Operation	0.01	0.01
Resistance to Solder Heat	0.01	0.01
Moisture Resistance	0.02	0.02
High Temperature Exposure	0.02	0.02
Load Life (25 % Power, 2000 h, +215 °C)	0.5	0.5
TCR	± 5 ppm/°C	± 5 ppm/°C

DERATING CURVE

PLTT0805 500 Ω STABILITY TEST RESULTS

PLTT0805 50 kΩ STABILITY TEST RESULTS

Note

- Performance obtained with following mounting conditions
PCB: Polyimide IPC-7831A STD land patterns
Solder paste: PbSnAg (93.5/5/1.5)



GLOBAL PART NUMBER INFORMATION																
P	L	T	T	0	8	0	5	Z	1	0	0	1	Q	G	T	1
GLOBAL MODEL	CASE SIZE	TCR CHARACTERISTIC		RESISTANCE				TOLERANCE		TERMINATION			PACKAGING			
PLTT	0603 0805 1206 2010 2512	Z = ± 5 ppm/°C		The first 3 digits are significant figures and the last digit specifies the number of zeros to follow. "R" designates the decimal point. Example: 1001 = 1 kΩ 2500 = 250 Ω Special values with more than 4 significant figures, use a R for value below 1 kΩ and a K for values greater than 1 kΩ to signify a decimal point. 982R6 = 982.6 Ω 532R41 = 532.41 Ω				Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % D = ± 0.5 % F = ± 1 % G = ± 2 %		G = Wraparound Gold over Ni barrier (10 μ" min. Au)			WS = WAFFLE WI = 100 min./1mult (item single lot date code) WP = 100 min./1mult (package unit single lot date code) TAPE AND REEL T1 = 1000 min., 1000 mult T5 = 500 min., 500 mult TF = Full reel TS = 100 min., 1 mult TI = 100 min./1mult (item single lot date code) TP = 100 min., 1 mult (package unit single lot date code)			