

## Safety isolating transformer **ACT 10**



### Advantages

Integrated short circuit and overload protection thanks to temperature fuse in the input and fuse in the output (ACT 10 only temperature fuse)

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDensiFill resin encapsulation

Stable plastic housing for rail mounting, e.g. in consumer units or meter mounting boards

### Applications

Safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

### Standards



Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6


### Approvals



# Safety isolating transformer ACT 10

Type		ACT 10
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	24 Vac
	Rated Power	10 VA
	Environment	
	Ambient temperature max.	25 °C
	Cooling method	self cooling
	Safety and protection	
Type	Resin encapsulated transformer	
Class of Insulation System	B	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-inherently short-circuit proof	
Test voltage	3750 Vac, 50 Hz	
Order numbers		
<b>Order Number</b>	<b>ACT 10</b>	

Type		ACT 10
Mechanical data	Terminal and mounting	
	Terminals	Screw-type terminal
	Fixing method	Panel installation on mounting rails
	Measures and weights	
	Weight	0.36 kg

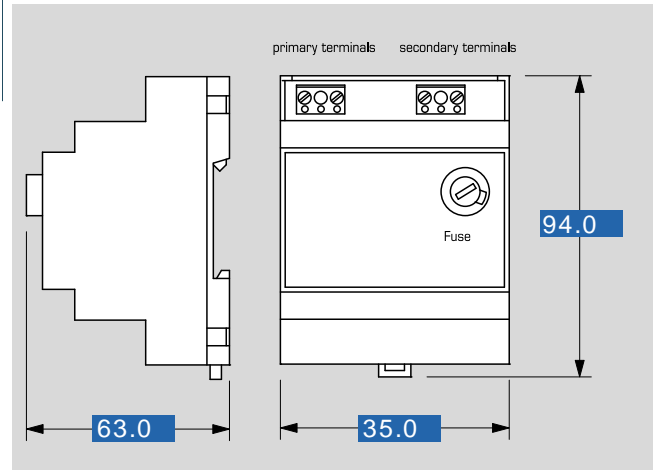

Subjects to change.