LEDs & INDICATORS

509 M-LED Series

- Threaded body for panel thicknesses 0.5-2.5mm, panel cut-out 6.5mm diameter
- 3.2mm LED with pin termination, anode pin cut short
- Polycarbonate lens with 65° viewing angle
- Nickel plated brass body, supplied with nut and shakeproof washer
- Red, green and amber lenses colour options as standard
- Blue and clear lenses to order
- Maximum working temperature 80°C



TYPE NO.	509 X 13 - LED - T / XXX
509 Series Indicator	509
Lens cyclinder flat	1
Lens cyclinder domed	2
Pin termination	13
LED, anode pin cut short	LED
Transparent lens	T
Lens colour Red	RED
Lens colour Green	GRN
Lens colour Amber	AMB
Lens colour Blue	BLU
Lens colour Clear	CLR

Body Dimensions

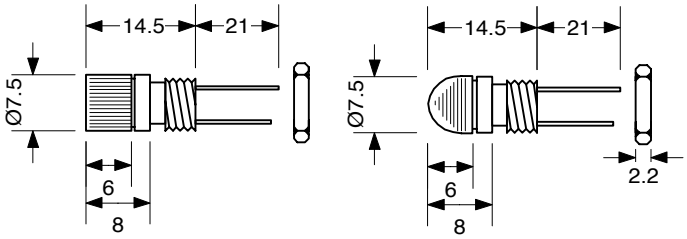

514 23-LED Series

- Press-fit body for various panel thickness, panel cut-out 8.0mm diameter
- LED pin termination, anode pin cut short
- Polycarbonate body/bezel and lens
- Red, green, amber, and blue lens colour options as standard
- Maximum working temperature 105°C



TYPE NO.	514 1 13 - LED - T / XXX
515 Series Indicator	514
Lens Type	1
Pin termination	13
LED, anode pin cut short	LED
Transparent lens	T
Lens colour Red	RED
Lens colour Green	GRN
Lens colour Amber	AMB
Lens colour Blue	BLU

Body Dimensions



CAMDENBOSS ELECTRONICS & ENCLOSURES
Ver 1.0
We operate a constant improvement policy, our products are subject to change without notice.
+44 (0)1638 716101
info@camdenboss.com
www.camdenboss.com