▲ Front Mesh Cover for High Cooling Performance

The front mesh bay cover provides cool air into the system while dust filters prevent dust from entering.
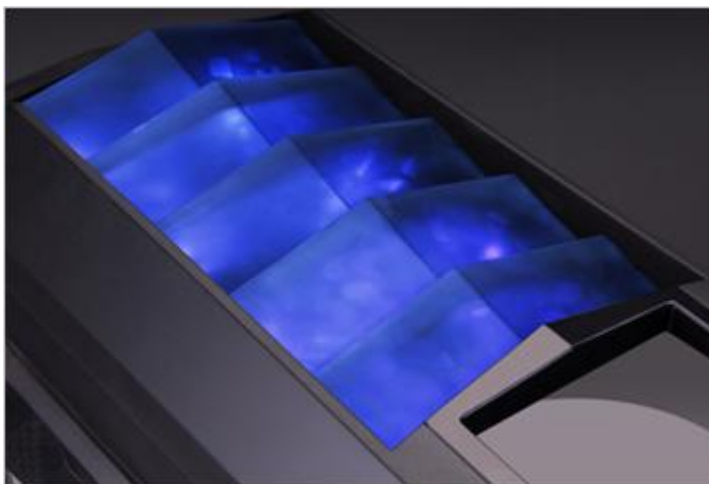

▲ Supports up to 7 System Fans

Up to 7 system fans are installed to expel hot air effectively from the case.

▲ Zalman`s Powerful HDD Cooling Solution

Interactive Cooling System : Hot air generated from HDD is expelled through both sides. Cooling Performance is maximized for HDD cooling, and the overall PC exhaust is increased.

▲ Top Air Vent Exhaust/Tuning

For user convenience, Top air vents expel exhaustive air from the top cooling fan. In addition, translucent acryl vents are effective for tuning.
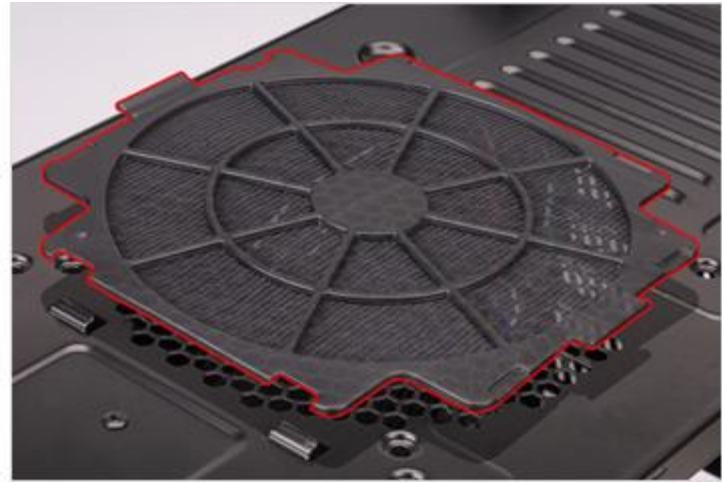

▲ Side-Panel Acryl Tuning

Dynamic Side Acryl Tuning is provided for users to view the interior of gaming system.

Supports Dual USB 3.0 Ports

I/O module provides dual USB 3.0 ports for user convenience and expandability.

Dust Filters for Front and Bottom of System and PSU

Dust filters in the front and bottom mesh covers prevent dust from entering the system and keep the internal components dust-free.

Additional Card Holder Provided

When installing VGA Card and PCI Slot, the bracket can be used permanently.

Supports Bottom PSU Installation and Aperture for Cable Management

Z11 Plus supports bottom PSU installation and provides an aperture for cable management to make better use of interior space.

Black Interior Coating

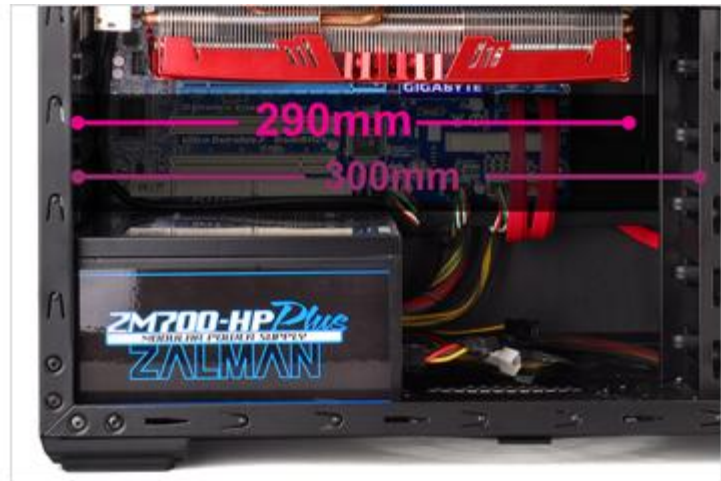The interior of chassis is coated black to provide a sense of unity and elegant design.

Anti-Vibration Rubber Stand

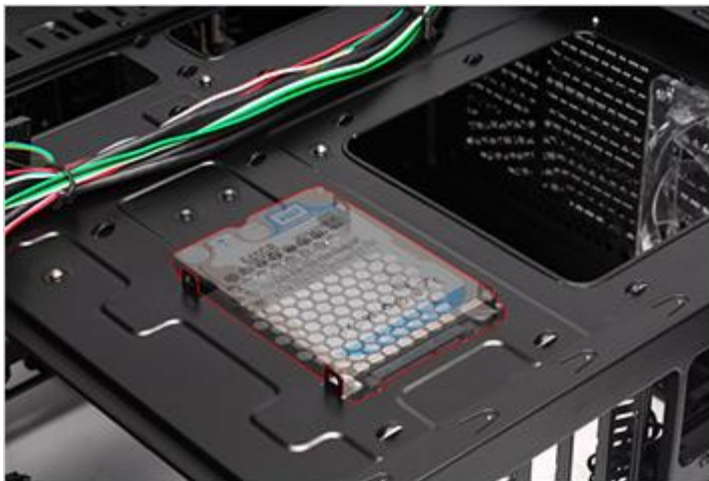Anti-Vibration Rubber prevents noise and also keeps the system safe from water or other liquid.

Tool Free HDD Installation with Anti-Vibration Rubber

The server-type Tool-Free HDD Mount Trays allow easy HDD installation/removal and maintenance.

Spacious Interior for 290mm Card Installation

The interior has been designed to be spacious for easy installation and maintenance of various components.

Supports Solid-State Drive (SSD)

Space is provided on the back of M/B plate for installing 2.5" HDD/SSD.

※ Use the bracket located on the 5.25" bay.

Separate Apertures for Convenient CPU Cooler Installation

Separate apertures for CPU cooler are provided for convenient CPU cooler installation without having to remove motherboard from case.

3-in-1 Bracket Provided

3IN1 Adapter Tray is provided for installing FDD / 3.5"

Rear Tube Apertures for Liquid Cooling Systems

Tube apertures are provided at the rear of the case for convenient water

HDD / 2.5" HDD/SSD.   cooling set-up and maintenance.

COMPONENTS

- Main Unit
- Stand-off
- A Bolts (#6-32*6mm) [PSU/PCI Slot Installation]
- B Bolts (M3*5mm) [M/B, FDD, SSD Installation]
- C Bolts (M3*6mm) [5.25" Bay ODD Installation]
- D Bolts (#6-32*4mm) [3.5" Bay HDD Installation]
- E-Bolts (#6-32*6mm) [3.5" HDD Installation]
- HDD Anti Vibration Damper [3.5" Bay HDD Installation]
- Cable Ties
- CPU Power Extension Cable
- Card Holder PCI Bracket
- SSD Tray
- User`s Manual

SPECIFICATIONS

Enclosure Type		ATX Mid Tower
Dimensions		260(W) x 498(H) x 525(D)mm
Weight		7.4kg
Material		Plastic, Steel
Motherboard Compatibility		Standard ATX / Micro ATX
Power Supply Compatibility		Standard ATX / ATX12V
VGA Compatibility		Full Size (up to 290mm)
Expansion Slot		7
Drive Bays	5.25"	External Bay x 4
	3.5"	External Bay x 1, Internal Bay x 5
	5.25"/3.5"/2.5"	1 (3in-1)
Cooling Components	Front	1 x 120mm Blue LED Fan (120mm / 140mm)
	Top	2 x 120mm Fan (1 x Blue LED Fan Included, 1 x Optional)
	Rear	1 x 120mm Fan (Standard)
	Side	2 x 80mm Fan
	Bottom	120mm/140mm Fan Vent x 1 (Fan optional)
I/O Ports		Mic x 1, Headphones x 1, USB 2.0 x 2, USB 3.0 x 2
Color		Black

CAUTIONARY NOTES

1. Please read this manual thoroughly prior to installation.

2. Before installing, check the components and condition of the product, and if any problem is found, contact the retailer.

3. Avoid inserting objects or hands into the system while it is in operation to prevent product damage and injuries.

4. Check the manual when connecting cables. Incorrect connections may cause short circuits leading to fire hazards.

5. Do not block the front intake vent or the rear exhaust vent.

6. Keep this unit away from heat sources, direct sunlight, water, oil, and humid environments, and place the unit on a flat, stable, vibration-free, and well-ventilated area.

7. Do not clean the product surface with chemicals or wet cloth. (chemicals: industrial brightener, wax, benzene, alcohol, paint thinner, mosquito repellent, aromatics, lubricant, detergent etc.)

8. Please wear gloves while handling this product to prevent injuries.

9. Product design and specifications may be revised to improve quality and performance.

10. Zalman Tech Co., Ltd. is not responsible for any damages due to external causes, including but not limited to, improper use, problems with electrical power, accident, neglect, alteration, repair, improper installation, or improper testing.