

Thermopile Sensor

TPS 1T 0236 L5.5 OAA180

Revision8 - Date: 2014/03/03



Features and Benefits

- Internal signal processing
- Factory calibrated
- Optics available
- Ambient temperature compensation

Target Applications

- General purpose temperature monitoring

Reference Document:	
Product Name: TPS 1T 0236 L5.5 OAA180	Part Number: 6264
Sensing Range: -20...180 °C	
Accuracy:	$\pm 1.5 \text{ K @ calibration point (Tobj = 100 °C , Tamb = 25 °C)}$ $\pm 2.5 \text{ K @ (80 °C ≤ Tobj ≤ 180 °C , Tamb = 10 ... 80 °C)}$

1 Maximum Ratings

Table 1: Absolute Maximum Ratings

Parameter	Min	Max
Supply voltage V_{DD}	-0.3 V	+6.5 V
Storage temperature range ^{Note 1)}	-40 °C	100 °C
Operating temperature range	-25 °C	100 °C
Voltage at all inputs and outputs ^{Note 2)}	-0.3 V	$V_{DD} + 0.3 \text{ V}$
Current at input pins ^{Note 2)}		+/- 5 mA
Lead temperature (Soldering, 10 sec)		+300 °C
ESD tolerance ^{Note 3)}		2.5 kV

Note 1: Extension to 120 °C for limited periods of several minutes possible.

Note 2: Limiting input pin current is only necessary for input voltages that exceed absolute maximum input voltage ratings.

Note 3: Human body model, 1.5 kΩ in series with 100 pF. All pins rated per method 3015.7 of MIL-STD-883.

Static-sensitive device. Unused devices must be stored in conductive material. Protect devices from static discharge and static fields.

Stresses above those listed under "Absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Precautions should be taken to avoid reverse polarity of power supply. Reversed polarity of power supply results in a destroyed unit.

Do not expose the sensors to aggressive detergents such as freon, trichlorethylen, etc. Optical windows (e.g. filter, lens) may be cleaned with alcohol and a cotton swab.

2 Sensor Characteristics

Table 2: Electrical Characteristics

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
Power Supply						
V_{DD}	Supply Voltage	4.5	5	5.5	V	
I_{DD}	Supply Current		1.5	2	mA	$R_L > 1\text{ M}\Omega$
Outputs V_{Tobj} / V_{Tamb}						
V_O	Output Voltage Swing	0.25		$V_{DD} - 0.25$	V	$I_{out}: -100\text{ }\mu\text{A} \dots +100\text{ }\mu\text{A}$
R_O	Output Resistance			100	Ω	
R_L	Resistive Output Load	50			$k\Omega$	
C_L	Capacitive Output Load		100	500	pF	
ISC	Output short circuit current		6		mA	Sourcing
			13		mA	Sinking
V_{oL}	Low level output voltage			0.5	V	output current $\leq 2\text{ mA}$
V_{oH}	High level output voltage	$V_{DD} - 0.6$			V	output current $\geq 2\text{ mA}$
Reference Voltage						
V_{Ref}	Reference voltage	1.223	1.225	1.227	V	$R_L > 1\text{ M}\Omega$, $T_{amb} = 25^\circ\text{C}$
TC_{VRef}	Temperature coefficient of reference voltage		± 30	± 100	ppm K^{-1}	

Unless otherwise indicated, all limits specified for $T_{amb} = 25^\circ\text{C}$, $V_{DD} = +5\text{ V}$

Table 3: AC Characteristics

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
I_{nN}	V1 Input referred voltage noise			120	nV/ $\sqrt{\text{Hz}}$	rms value
t_{Strt}	Response time after power on			1	s	
t_{lat}	Latency time for V_{Tobj}			75	ms	
t_{resp}	Response time		100	150	ms	

Unless otherwise indicated, all limits specified for $T_{amb} = 25^\circ\text{C}$, $V_{DD} = +5\text{ V}$

Table 4: Thermopile Characteristics

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
TPS 1T 02						
S	Sensitive (absorber) area		0.7×0.7		mm^2	
N	Noise voltage		38		nV/ $\sqrt{\text{Hz}}$	
τ	Time constant		25		ms	

Table 5: V_{Tobj} Characteristics

Temperature [°C]	Min	Typ	Max	Unit	Gradient [V·K ⁻¹]
-20	0.881	0.894	0.908	V	0.0054
-10	0.937	0.952	0.968	V	0.0062
0	1.001	1.019	1.036	V	0.0071
10	1.074	1.094	1.114	V	0.0080
20	1.156	1.179	1.201	V	0.0090
25	1.201	1.225	1.249	V	0.0095
40	1.352	1.380	1.408	V	0.0112
50	1.468	1.499	1.530	V	0.0125
60	1.595	1.630	1.664	V	0.0138
70	1.737	1.775	1.813	V	0.0152
80	1.892	1.934	1.976	V	0.0167
100	2.270	2.300	2.330	V	0.0200
110	2.454	2.509	2.563	V	0.0217
120	2.676	2.735	2.794	V	0.0236
130	2.917	2.981	3.045	V	0.0256
140	3.178	3.248	3.317	V	0.0277
150	3.461	3.535	3.610	V	0.0299
160	3.765	3.845	3.926	V	0.0321
180	4.444	4.536	4.629	V	0.0371

Unless otherwise indicated, all limits specified for $V_{DD} = +5\text{ V}$, $V_{Ref} = +1.225\text{ V}$

Polynomial to calculate T_{obj} from V_{Tobj} :

$$T_{obj} [\text{°C}] = -0.603544 x^6 + 10.52162 x^5 - 74.95959 x^4 + 281.3649 x^3 - 599.180 x^2 + 750.84 x - 370.96$$

$x = V_{Tobj}$ in Volt

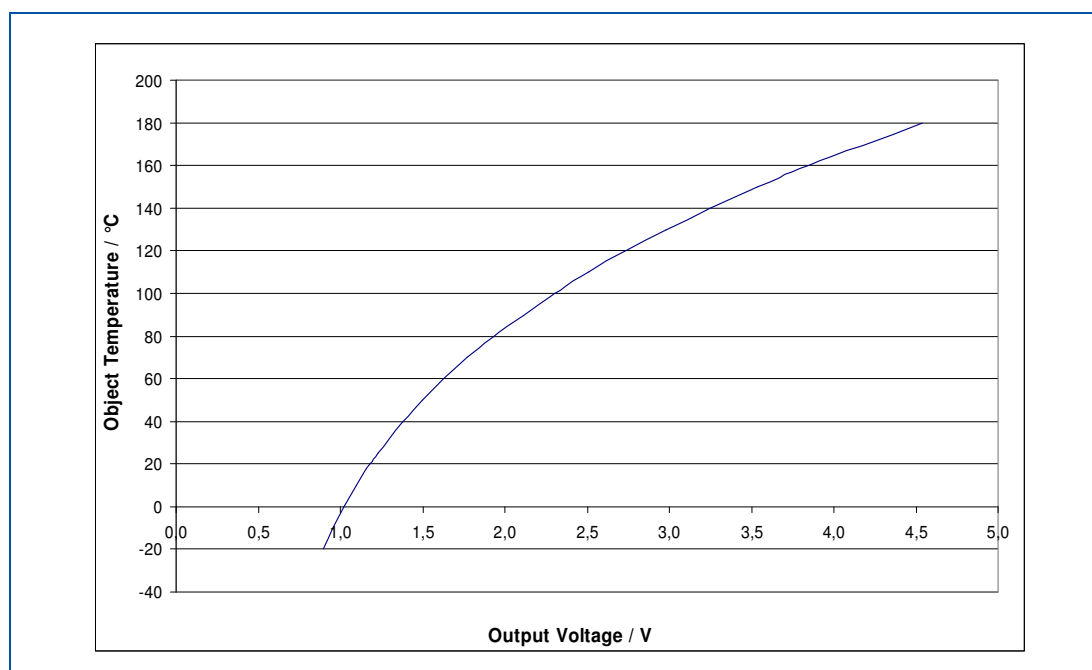
**Figure 1:** Output characteristic

Table 6: V_{Tamb} Characteristics

Temperature [°C]	Min	Typ	Max	Unit	Gradient [mV*K ⁻¹]
-20		0.621		V	6.9
-10	0.684	0.704	0.724	V	9.8
0	0.791	0.816	0.842	V	12.7
10	0.942	0.958	0.974	V	15.6
15	1.023	1.040	1.057	V	17.1
20	1.110	1.129	1.147	V	18.5
25	1.205	1.225	1.245	V	20.0
30	1.307	1.329	1.350	V	21.4
35	1.417	1.439	1.462	V	22.9
40	1.533	1.558	1.582	V	24.4
50	1.789	1.816	1.843	V	27.3
60	2.043	2.103	2.163	V	30.2
70	2.353	2.420	2.486	V	33.1
80	2.693	2.765	2.837	V	36.0
90	3.062	3.140	3.218	V	38.9
100	3.460	3.544	3.628	V	41.9

Unless otherwise indicated, all limits specified for $V_{DD} = +5\text{ V}$, $V_{Ref} = +1.225\text{ V}$

Polynomial to calculate T_{amb} from V_{Tamb} :

$$T_{amb} [^{\circ}\text{C}] = -1.523563 x^6 + 20.52003 x^5 - 112.09588 x^4 + 319.2295 x^3 - 508.327 x^2 + 475.52 x - 180.50$$

$x = V_{Tamb}$ in Volt

3 Optical Characteristics

Table 7: Optical Characteristics

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
Cap Type TO39 L5.5						
FOV	Field of view in X direction		7	12	°	50 % rel. output signal
OA	Optical axis		0	± 3.5	°	in reference to symmetrical axis of cap
D:S	Distance to Spot ratio		8:1			

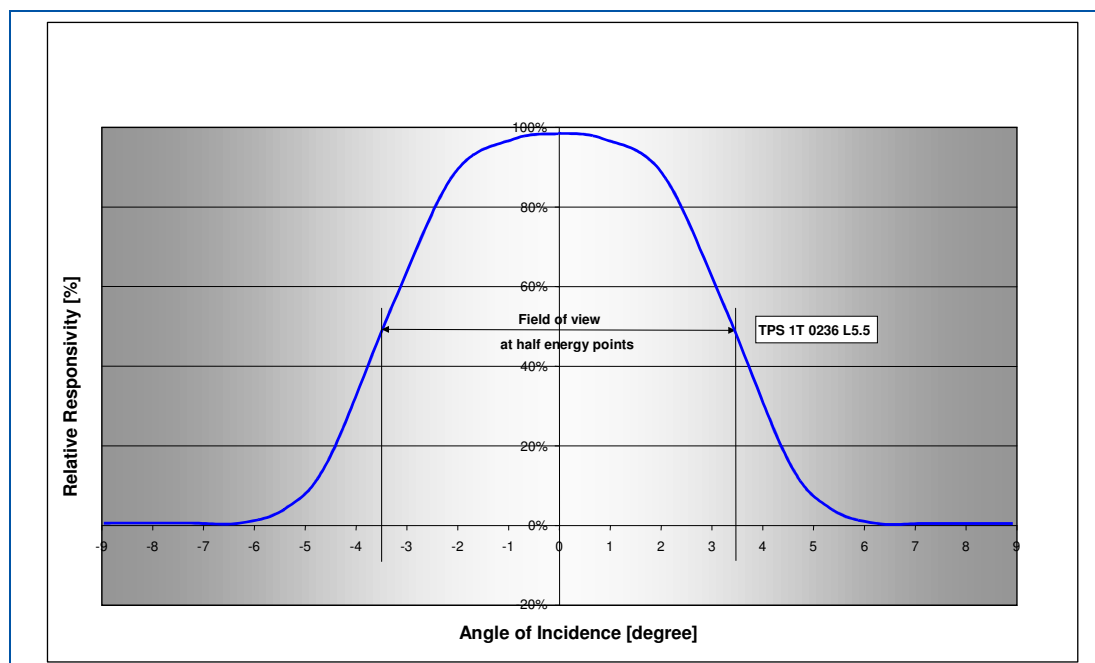


Figure 2: Typical Field of View characteristic

Table 8: Filter Parameters

Parameter	Min	Typ	Max	Unit	Conditions
Uncoated Silicon Lens (G12)					
Average Transmission	52			%	Wavelength range from 5.5 µm to 13.5 µm

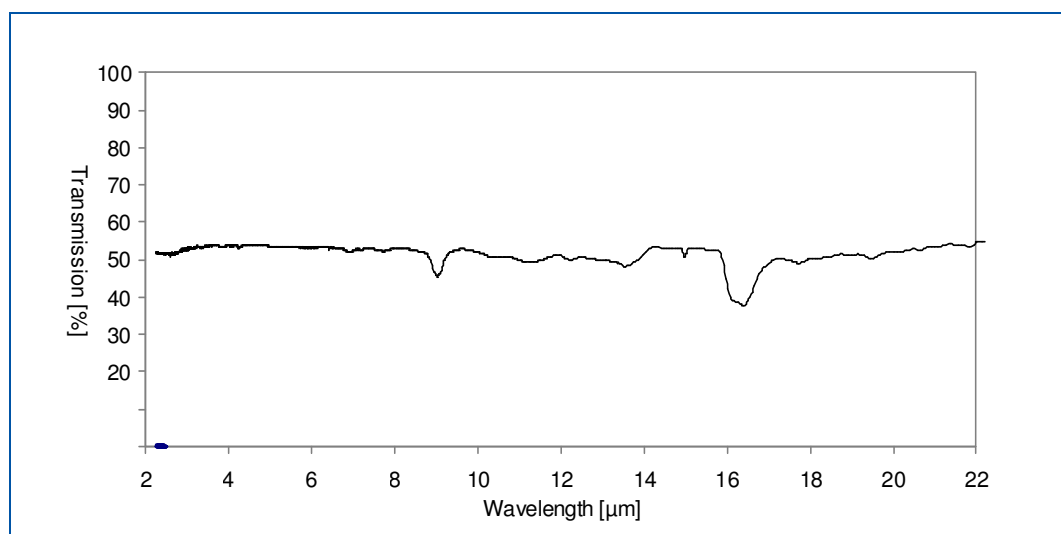


Figure 3: IR-Filter characteristic

4 Configuration

Feature	Adjustment	
Ambient Temperature Compensation	Enabled	✓
	Disabled	
V_{Tamb}/V_{Ref} Output Signal	Reference Voltage V_{Ref}	
	V_{Tamb} Signal	✓
V_{Tobj} Output Configuration	Analog Mode	✓
	Comparator Mode	
V_{Tamb} Output Configuration	Analog Mode	✓
	Comparator Mode	

5 Test Conditions

Object Size	Full FOV Coverage
Object Emissivity	> 99%
Object Temperature	100 °C $\pm$ 0.5 °C
Ambient Temperature	25 °C $\pm$ 1 °C
Supply Voltage	5V
Test Level	100%

Test pass criteria:

Tobj	Tamb	V_{Tobj}			V_{Tamb}		
		Minimum	Typical	Maximum	Minimum	Typical	Maximum
°C	°C	V	V	V	V	V	V
100	25	2.270	2.300	2.330	1.205	1.225	1.245

6 Mechanical Dimensions

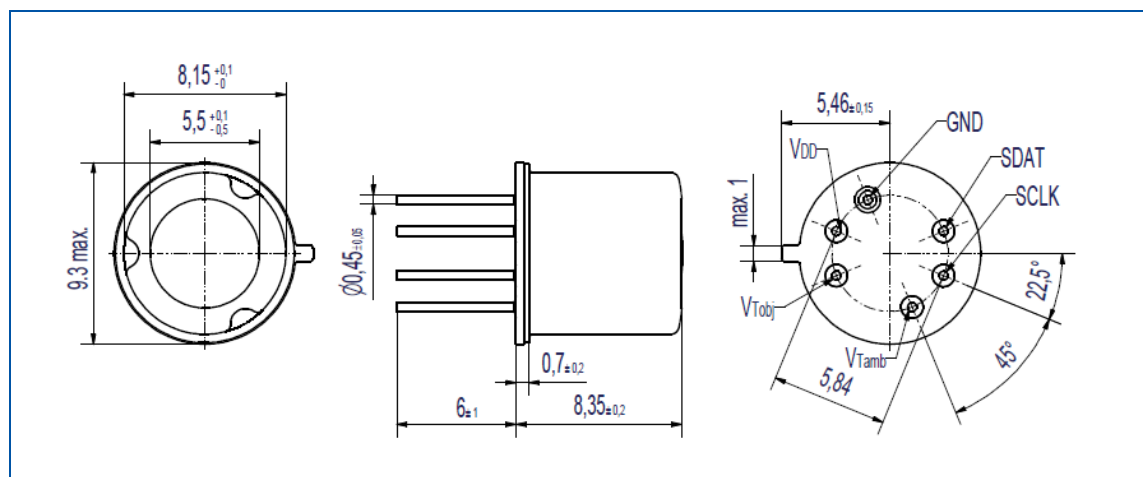



Figure 4: Mechanical dimensions of TPS 1T 0236 L5.5 sensor

7 Labeling

Sensor:

SSSS	Last four digits of the device part number
YYY	X = Last digit of the calendar year, YY = Week of the calendar year
HHH	Serial number of the production lot

Example:

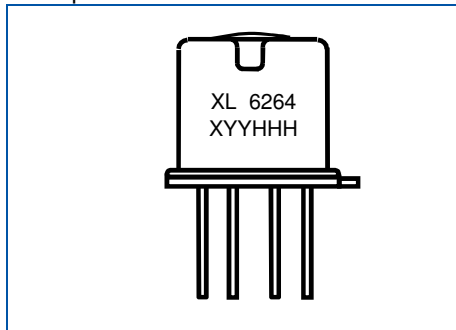

8 Quality Statement

Excelitas Technologies is an ISO 9001 certified manufacturer. All devices employing PCB assemblies are manufactured according to IPC-A-610 guidelines.

The sensor fully complies with the European RoHS environmental directives against the use of hazardous materials in electrical and electronic equipment.

8.1 Liability Policy

The contents of this document are subject to change without notice and customers should consult with Excelitas Technologies sales representatives before ordering. Customers considering the use of Excelitas Technologies thermopile devices in applications where failure may cause personal injury or property damage, or where extremely high levels of reliability are demanded, are requested to discuss their concerns with Excelitas Technologies sales representatives before such use. The Company's responsibility for damages will be limited to the repair or replacement of defective product. As with any semiconductor device, thermopile sensors or modules have a certain inherent rate of failure. To protect against injury, damage or loss from such failures, customers are advised to incorporate appropriate safety design measures into their product.

Excelitas Technologies GmbH & Co. KG.
Wenzel-Jaksch-Str. 31
65199 Wiesbaden, Germany
Telephone: (+49) 611-492-247
Fax: (+49) 611-492-170

EXCELITAS
TECHNOLOGIES

For a complete listing of our global offices, visit www.excelitas.com
©2014 Excelitas Technologies, Inc. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies, Inc. All other trademarks not owned by Excelitas Technologies, Inc. or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.