

# Agilent U1177A IR-to-Bluetooth® Adapter

Data Sheet

## Features

- Enables *Bluetooth* connection to Agilent handheld digital multimeters
- Easy to install by attaching to Infrared (IR) port located at the back of Agilent handheld digital multimeters
- Compatible with Agilent U1230 series, U1240 series, U1250 series and U1270 series handheld digital multimeters
- Operated by two 1.5 V AAA batteries

*Bluetooth* and the *Bluetooth* logos are trademarks owned by *Bluetooth* SIG, Inc., U.S.A. and licensed to Agilent Technologies, Inc.

Agilent U1177A Infrared (IR)-to-*Bluetooth* adapter offers wireless remote connectivity solution via *Bluetooth* connection simply by attaching the adapter to the IR port of an Agilent handheld digital multimeter. The wireless remote connectivity is set up when an Agilent handheld digital multimeter is connected to U1177A and an Android device (tablet or smart phone) with the installed software. Every U1177A also has a unique Media Access Control (MAC) address. User can quickly and easily scan for the right U1177A using their Android device and pair up with the U1177A.



Figure 1. Award winning U1177A Infrared (IR)-to-*Bluetooth* adapter is being recognized as an innovative solution in Test & Measurement industry

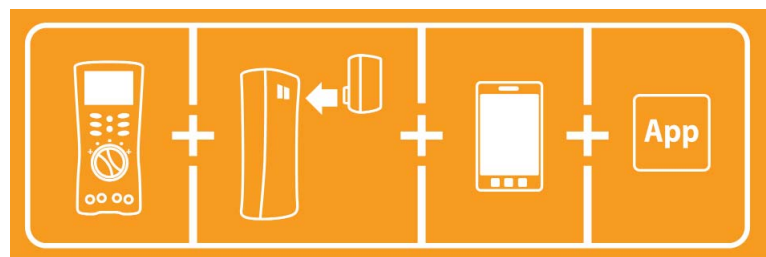


Figure 2. Agilent wireless remote connectivity solution



Take a closer look



Figure 3. The U1177A as illustrated

## Perform data logging with up to three multimeters – wirelessly and simultaneously!

Data logging is an important function for industrial users to capture data streams or plotting trending graphs. These data and graphs are used for analysis to identify intermittent behavior or detect drifts. Agilent Mobile Logger is the free Android application software that logs data and provides trending graphs from Agilent handheld digital multimeters. Agilent Mobile Logger offers an array of extended functions such as sending e-mail or Short Message Service (SMS) automatically, and pan and zoom function via the Android device's touch screen. Alternatively, data logging and monitoring activities can also be performed at the comfort of one's Personal Computer (PC) via a downloadable Agilent GUI data logger software.

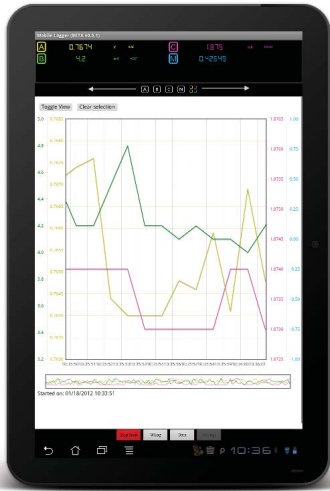


Figure 4. Data logging with Agilent Mobile Logger software.

### Notes:

1. Agilent Mobile Meter and Agilent Mobile Logger can be downloaded from [www.agilent.com/find/hh-Android](http://www.agilent.com/find/hh-Android) or from Android Market (<https://market.android.com/>)
2. Agilent GUI Data Logger Software can be [www.agilent.com/find/hh-logger](http://www.agilent.com/find/hh-logger)

## Monitor up to three multimeter measurements at the same time with Agilent Mobile Meter

Agilent Mobile Meter is a free Android application software that allows an Android device to connect, control and perform up to 3 multimeter measurements. Without the need to be physically present at various points, users can now extend their reach to two or three places. This solution allows you to make measurements from a safe distance, eliminates the need to walk back-and-forth between measure target and control points, and monitors multiple measurements simultaneously. Achieve higher work productivity when you use the U1177A with your Agilent handheld digital multimeters.

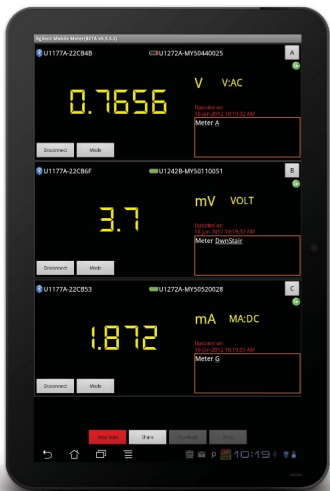


Figure 5. Up to three multimeters measurements with the Agilent Mobile Meter

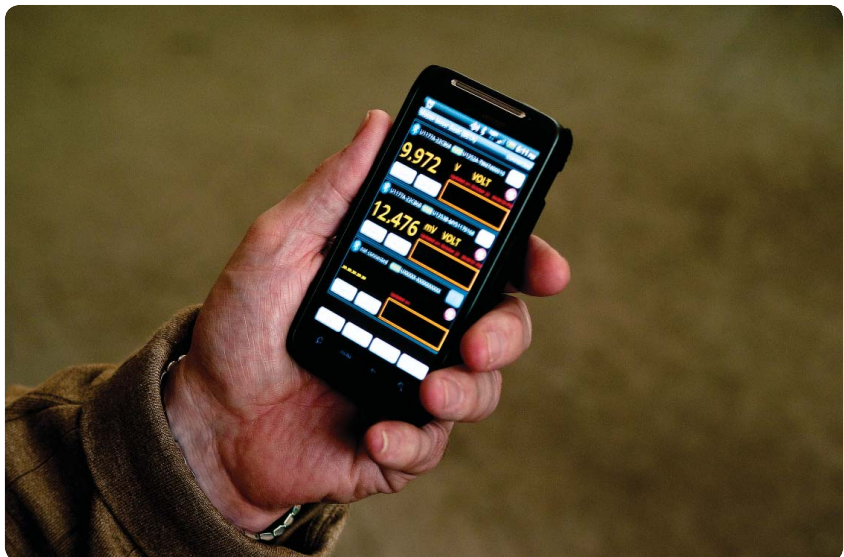


Figure 6. Make measurements with the Agilent Mobile Meter via an Android smart phone

# Specifications

Product characteristics	Description
Radio specification	<ul style="list-style-type: none"> <li>• Frequency: 2402 MHz ~ 2480 MHz</li> <li>• Antenna Power: 1 mW or less</li> <li>• Number of Channels: 79</li> <li>• Modulation: GFSK / PSK</li> </ul>
Operating environment	Operating temperature from –20 to 55 °C
Storage environment	Storage temperature from –40 to 70 °C
Relative humidity (R.H.)	Relative humidity up to 95% at 40 °C (non-condensing)
Power consumption	Maximum 130 mVA for two 1.5 V AAA batteries
Battery life	30 hours typical (based on continuous data transfer)
Battery type	Alkaline 24 A (ANSI/NEDA) and LR03 (IEC), or Zinc Chloride 24 D (ANSI/NEDA) and R03 (IEC)
Dimension (W x H x L)	39.0 × 71.0 × 37.0 mm
Weight	60 g with batteries
Warranty	Three months
<i>Bluetooth</i>	<b>"Bluetooth"</b> Version 2.1 + EDR compliant, SPP profile, Class 2 device (with 10 metres connection range)
Safety	<p>The U1177A complies with the requirements of the following safety and regulation standards:</p> <ul style="list-style-type: none"> <li>• FCC Part15C (Certification) (15.209, 15.247) FCC ID: ZKMAGILENT-U1177A</li> <li>• FCC Part15B (DoC) (15.109)</li> <li>• RSS–210 Issue 8:2010 IC: 6310A–U1177A</li> <li>• ICES–003 Issue 4:2004</li> <li>• EN 300 328 V1.7.1:2008</li> <li>• EN 301 489–1V1.8.1:2008/–17 V2.11:2009</li> <li>• EN 55022:2006+A1:2007/EN55024:1998+A1:2001+A2:2003</li> <li>• EN 50371:2002</li> <li>• EN 60950–1:2006/A11:2009/A1:2010</li> <li>• Complies with IDA Standards (DB 102425)</li> <li>• India Equipment Type Approval (ETA) Certificate No: 1424/2011/WRLO</li> <li>• COFETEL Certificate No: RCPAGU111-1066, registered under Agilent Technologies Mexico S de RL de CV</li> </ul> <p>"This telecommunication equipment conforms NTC technical requirement"</p>



### Standard shipped items:

- Two 1.5 V AAA batteries
- Operating instructions



**myAgilent**

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.axistandard.org](http://www.axistandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



**Three-Year Warranty**

[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Agilent's combination of product reliability and three-year warranty coverage is another way we help you achieve your business goals: increased confidence in uptime, reduced cost of ownership and greater convenience.



**Agilent Advantage Services**

[www.agilent.com/find/AdvantageServices](http://www.agilent.com/find/AdvantageServices)

Accurate measurements throughout the life of your instruments.



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)  
[www.agilent.com/find/U1177A](http://www.agilent.com/find/U1177A)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700* *0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

(BP-3-1-13)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013  
Published in USA, March 13, 2013  
5990-9531EN



**Agilent Technologies**